FREE 48-PAGE SUPPLEMENT

Practical Computing

85p October 1983 Volume 6 Issue 10

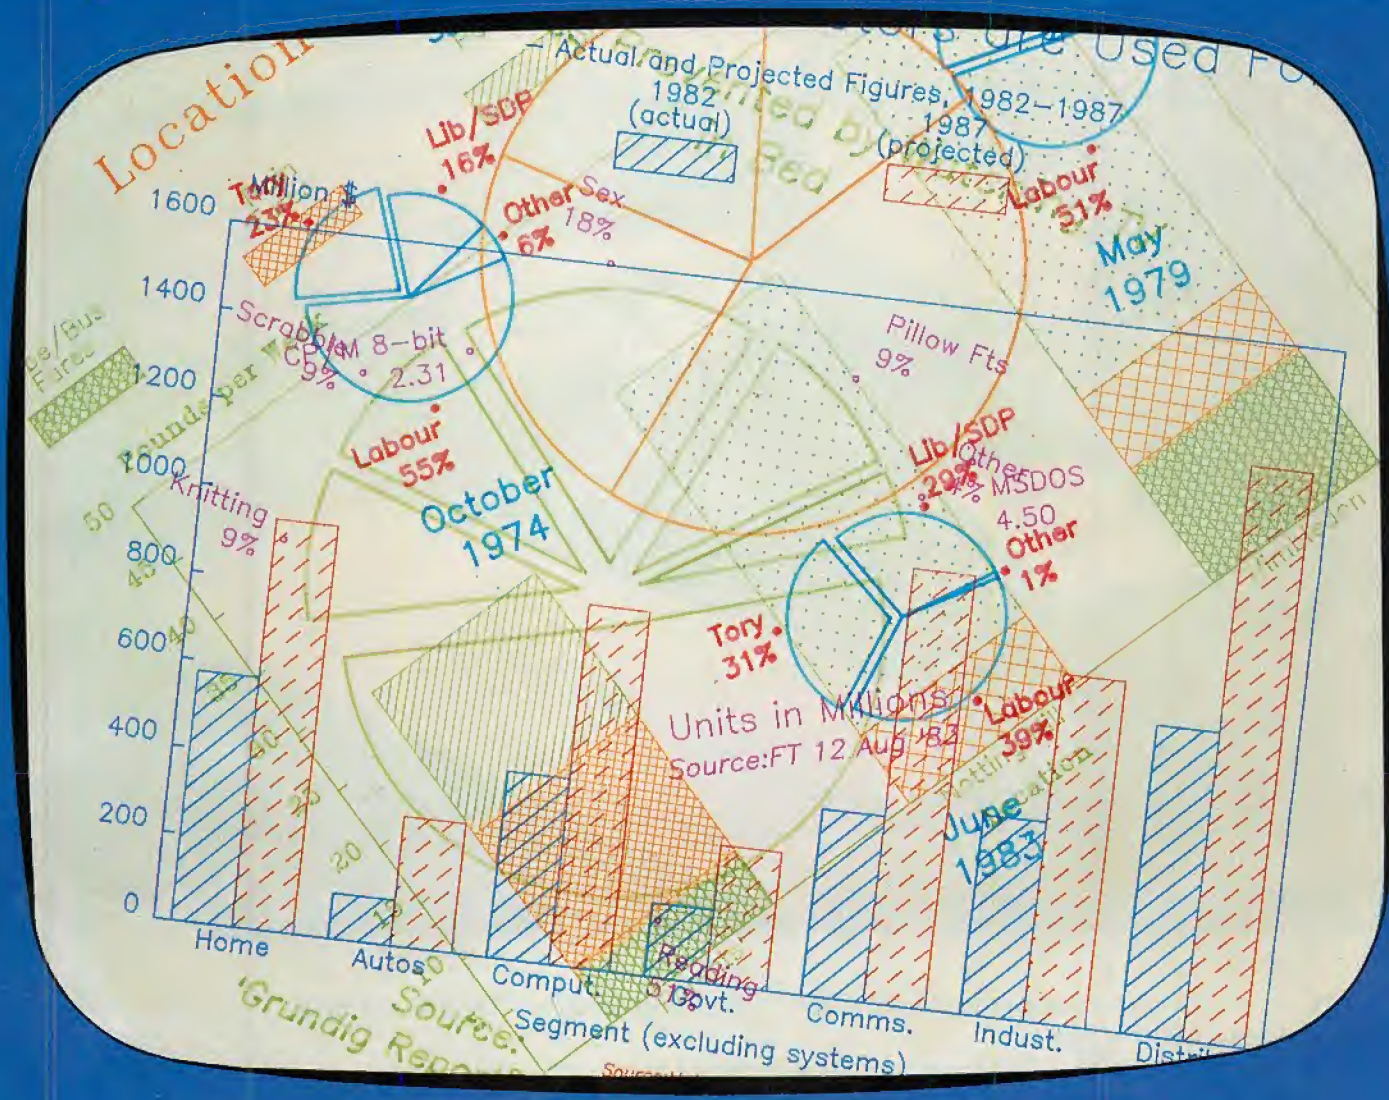

Exclusive

Special issue — VDUs and graphics

Inside the Advance — an IBM for under £400?

Acorn's Electron — a chip off the BBC block

CP/M Plus, Atariwriter, Dragon games

Denmark DKr34.50, Greece Dra245.00, Holland DFL8.50, Italy L4100, Spain Pts360.00, Switzerland SFr7.40, Germany DM8.50, France Fr32.60, Canada C$4.50, Australia A$3.00, Singapore M$6.35

IS THIS LEVEL OF RELIABILITY REALLY NECESSARY?

ACCUTRACK

If you've ever lost data due to a faulty disk, you know how important reliability can be.

That's why Accutrack disks are critically certified at 2-3 times the error threshold of your system. Why they're precision fabricated for higher signal quality, longer life and less head wear. And why we take such extra steps as testing single-density mini disks at double-density levels. So you don't have to worry about the reliability of your media.

Accutrack disks. OEMs have specified them for years. You can trust them for your data.

Distributed in the United Kingdom by:
Penbie International (C.A.) Ltd.
23 Addington Road
Reading RG1 5PZ
Berkshire
Tel: (734) 664361

ACCUTRACK
Dennison KYBE (UK)
9 Colonial Way
Watford WD2 4JY
Tel: (923) 50596
Telex: 923321
Offices and representatives worldwide

● Circle No. 101

>LIST

PRACTICAL COMPUTING OCTOBER 1983

>NEWS

>REVIEWS

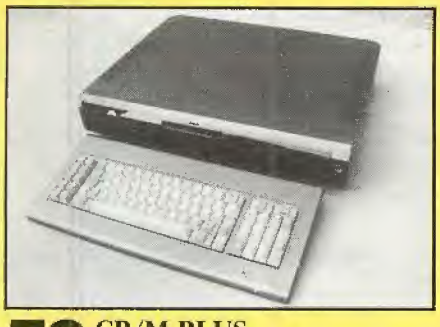

>VDU'S AND GRAPHICS

>FEATURES

>REGULARS

This month's cover illustration was created by Steve Miller and Ian Stobie using a Hewlett Packard Series 200 Model 16 with HP-7470A plotter.

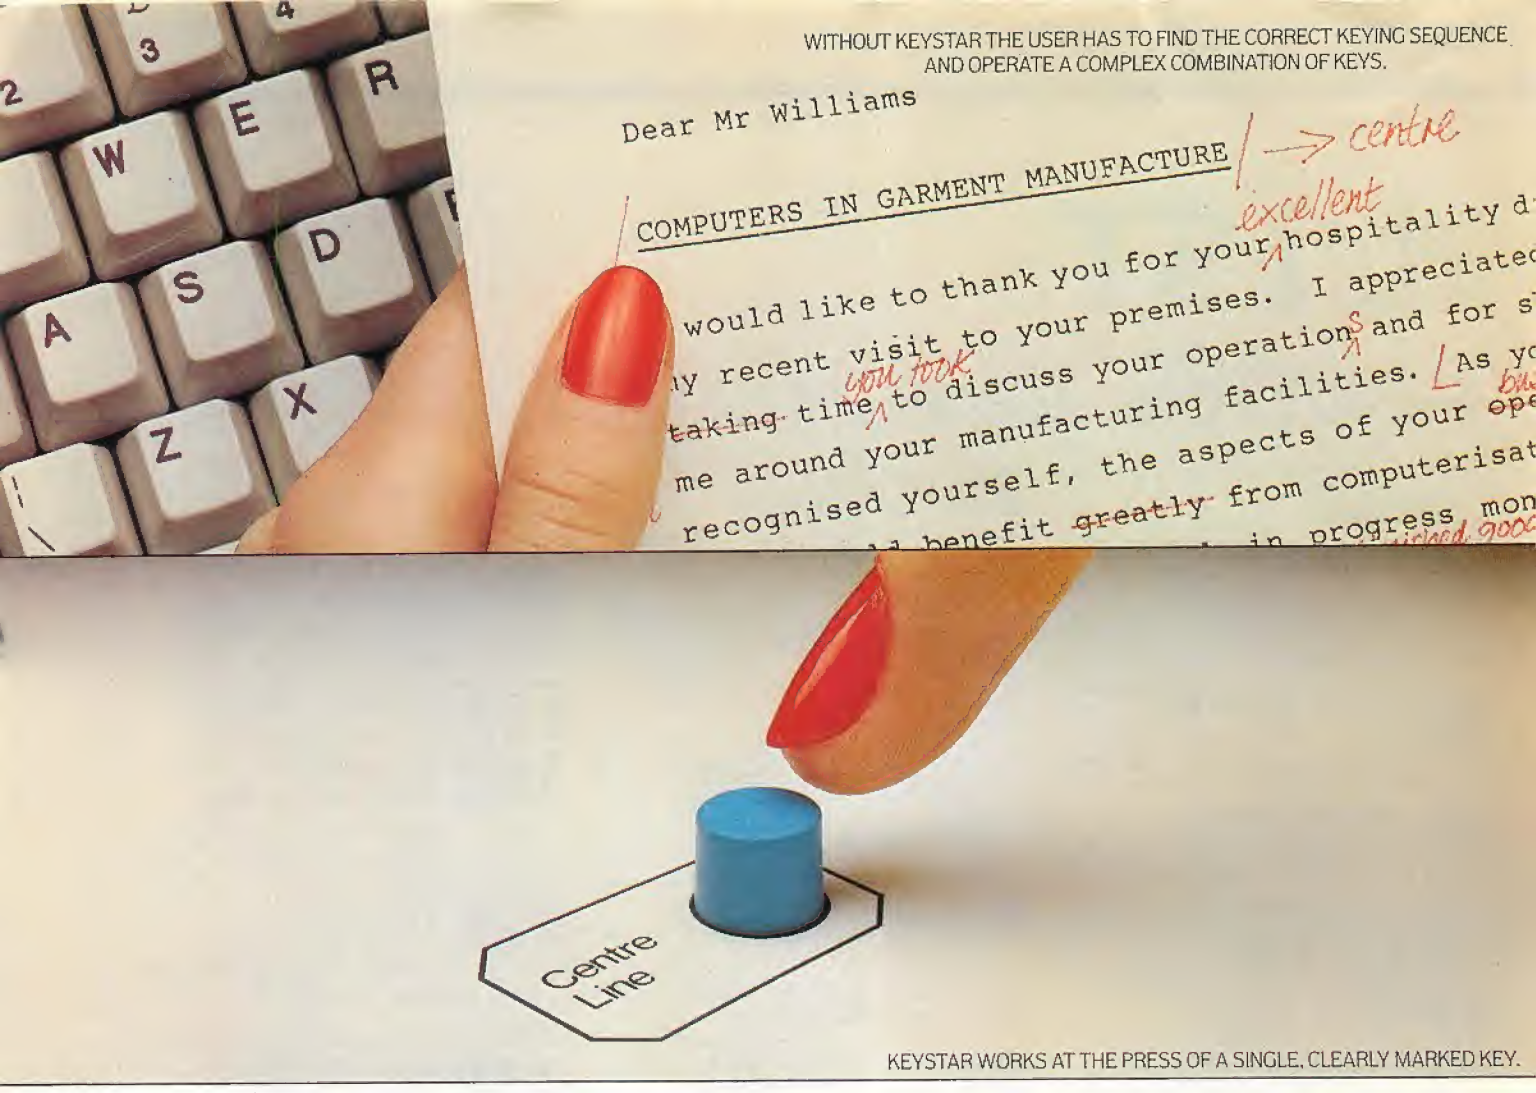

Keystar™ puts editing on Wordstar™ into plain language.

Is your secretary the only person in your office who can talk to your word processor?

Wordstar is by far the most popular word processing program available. But, like all such systems, it takes time and practice to learn its language.

Keystar now puts the whole office on speaking terms with Wordstar. Good news for those of us who have to work late on that vital report. And for the temp who started yesterday. (We like to think that it will also add a whole new dimension to your secretary's relationship with Wordstar.)

Keystar makes Wordstar immediately accessible by providing fifty-six of its editing commands as colour-coded buttons, each labelled in plain English.

Press the appropriate Keystar button; Wordstar performs as commanded. And since there is no need to display help menus, there is fifty per cent more room on the screen for your documents.

Make Wordstar work for you! Contact your nearest Keystar dealer or order direct by completing and returning the order coupon.

For the technically minded, Keystar connects easily to your microcomputer via an RS232C/V24 serial port. This port can be shared with other devices and on some systems, for example, Cromemco and Altos the device would naturally be the V.D.U.

On integral systems, e.g. Apple II, Osborne, RML380Z, Superbrain, Act Sirius/Victor 9000, IBM PC, the device could be a printer, a plotter or a modem and special instructions are provided to direct Wordstar to recognise the presence of Keystar on such systems.

To: WMI PRODUCTS, INTEGRATED MICRO APPLICATIONS LTD., 21 LANSDOWNE CRESCENT, EDINBURGH EH12 5EH

Please send me _____ Keystar units at £231.75 per unit (price includes VAT, carriage and insurance).

I will be connecting Keystar to a _____ microcomputer.

I enclose a cheque/postal order for £ _____ made payable to 'WMI Products.'

Please debit my Access Card No _____ for £ _____

Visa Card No _____ for £ _____

Signature _____

Name _____

Address _____

_____ Tel. No. _____

Dealer enquiries welcome. Telephone 031-225 3141 ask for Jim Wheatley.

Please allow 28 days for delivery. VAT No. 270769925.
Integrated Micro Applications Ltd reserve the right not to accept any order. Any acceptance will be subject to Integrated Micro Applications' terms and conditions.

Wordstar is a registered trademark of Micropro Corporation International.

● Circle No. 102

Practical Computing

EDITORIAL 01-661 3609
Editor
Jack Schofield
Deputy Editor
Bill Bennett
Assistant Editor
Ian Stobie
Art Editor
Steve Miller
Production Editor
John Liebmann
Sub-editor
Sally Clark
Editorial Secretary
Sue Jordan
Consultants
Chris Bidmead
Peter Laurie
ADVERTISING 01-661 3612
Advertisement Manager
Ian Carter 01-661 3021
Assistant Advertisement Manager
Kenneth Walford 01-661 3139
Advertisement Executives
Lynne Brennan 01-661 3468
Robert Payne 01-661 8425
David Honeyman 01-661 8626
Advertisement Secretary
Janet Thorpe
Midlands office:
David Harvett 021-356 4838
Northern office:
Geoff Aikin 061-872 8861
PUBLISHING DIRECTOR
Chris Hipwell

Published by Electrical Electronic Press, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01-661 3500. Telex/grams 892084 BISPRS G.

Distributed by Business Press International Ltd, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Subscriptions: U.K. £13 per annum; Overseas £19 per annum; selling price in Eire subject to currency exchange fluctuations and VAT; airmail rates available on application to Subscription Manager, Business Press International Ltd, Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH. Tel: 0444 459188.

Printed in Great Britain for the proprietors Business Press International Ltd by Eden Fisher (Southend) Ltd, Southend-on-Sea. Typeset by Centrepoint Typesetters, London EC1.

Would-be authors are welcome to send articles to the Editor but *PC* cannot undertake to return them. Payment is at £35 per published page. Submissions should be typed or computer-printed and should include a tape or disc of any program. Hand-written material is liable to delay and error.
Every effort is made to check articles and listings but *PC* cannot guarantee that programs will run and can accept no responsibility for any errors.

Overkill

ONE OF THE moans that issues from these offices is that there are too many microcomputers. One of the moans of the micro manufacturers is that there are too many magazines. They do not have time to read them, and do not know where to place their advertisements.

Of course both moans are sweeping generalisations, and all generalisations are false. There may be too many badly designed micros, but there is still room for a few more good ones. Similarly there may be too many magazines, but there is surely a market for one or two more with something new to offer.

With this in mind we are currently planning a new magazines called *Computer Choice,* which will be edited by *Practical's* soon to be former deputy editor, Bill Bennett. It will deal exclusively with micros costing less than £200.

The last bookstall magazine launched from the *Practical Computing* office was *Your Computer*. Its brief was to concentrate on the home/games market, leaving us free to focus on the more serious side of computing. With the boom in the home market *Your Computer* has grown to be the U.K.'s largest selling micro magazine — by a wide margin.

Practical Computing's circulation has grown by a mere 25 percent over the last six months. The audited average sale for the six months from January to June was 61,100, though recent issues have sold more.

Naturally we are delighted with this response to our efforts, if only because it proves there are people out there who are interested in more than just space invaders. Needless to say we will try to make the magazine even more useful and informative in the future.

Normally we do not boast about our small successes, but the margazine market is becoming very competitive. With new micros being launched there are always new potential readers and new potential advertisers. Almost by definition they start from a position of ignorance.

Some companies, even big companies, know so little about the micro world they do not even know how little they know. Advertisement managers in companies and in agencies, however, often seem to go from ignorance to arrogance in about 15 minutes. They are taken in by unaudited magazine circulation claims that stand no chance of ever being attained. Slick promotional brochures and cut-rate bargain offers must account for the bizarre media buying of some companies. Others can only be put down to naivety. We sometimes wonder why we bother producing magazines when we could be selling these people Tower Bridge or the crown jewels.

The things they say make us laugh. If you owned one of their micros or were employed making them they might make you cry. The reason is that in the next few years some 300 of the 400 companies making and/or distributing micros in the U.K. are likely to be taken over or go out of business. Designers and product managers will wonder where they went wrong, after all, their micro was as good as, or better than, the next one — right? They spent enough money on promotion — right? So why didn't they sell? Well we know the answer already, but in this case there is little joy in being wise before the event.

The forthcoming shake-out of manufacturers will lead to a shake-out of magazines, partly because not all of that misplaced advertising will be paid for. Also, the more aware companies will start to gauge the response they get to their advertisements, and — at last — the number of leads that are converted into sales. The many worthwhile magazines, including *Practical Computing, Your Computer* and, we trust, *Computer Choice* will continue to prosper while the rest quietly slink away.

All this will make the world a more reliable but, some would say, a duller place. We do not agree. Microcomputing is never going to be a dull subject.

5 Years ago...

A hobby computer just coming to the market in the U.K. is the Sorcerer. It is made by the American firm, Exidy Inc, a video games manufacturer.

The main selling point of the Sorcerer is price. You can buy a 16K version for £760 or a 32K version for £950 and, considering its facilities, this represents good value for money.

The system loaned to us was the 32K version. Standard configuration includes a 61-key typewriter keyboard and a 16-key pad. It looks like the Tandy keyboard without the numeric pad. To that you add your own power supply, TV monitor and cassette tape recorder(s).

For expansion purposes it takes the S-100 bus which gives you the ability to interconnect large memories, disc drives, speech and communications facilities.

The striking feature of the Sorcerer, though, is the way you load the Basic. It's a standard Basic which is loaded by way of a cartridge into the side of the keyboard. It looks rather like an eight-track stereo cartridge but inside is a ROM containing the language.

Practical Computing Volume 1, Issue 4

WATFORD ELECTRONICS

33 (PC) Cardiff Road, Watford, Herts, England

Tel Watford (0923) 40588. Telex: 8956095

ALL DEVICES FULLY GUARANTEED. Send Cheque, P.O.s, Cash, Bank Draft with Orders. ACCESS/MASTER CHARGE Accepted. GOVERNMENT & EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS WELCOME. P&P Add 60p to all Cash Orders. OVERSEAS Orders postage at cost.

VAT ALL PRICES ARE EXCLUSIVE OF VAT. PLEASE ADD 15% TO THE TOTAL COST INCLUDING P&P. SHOP HOURS. 9.00am-6.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING SPACE AVAILABLE. FOR QUANTITY PRICES PHONE WATFORD (0923) 40588

Computer IC's

1802CP	650
2114L-200n	95
2147-3	315
2532-450n	300
2564	£8
2708	250
2716-5v	250
2732-450n	295
27128-250	£25
27128-400	£20
2764-250n	395
3242	690
4116-200	90
4118 250	325
4164 200	425
4532-3	300
4816A 100nS	225
5101	220
6116-150	340
6116L 120nS	550
6117 100n	490
6167-6	795
6502A	450
6502 CPU	325
6520	125
6522 VIA	285
6530 RRIOT	£11
6532 RIOT	570
6545 CRTC	899
6551 ACIA	650
6592 PC	£20
6800	£69
6802	250
6803	850
6804	160
6805	670
6808	520
6809	630
6810	115
6821	100
68821	220
68854	780
6840	375
6843	£12
6845	650
6847	650
6850	110
6852	250
6854	599
6875	500
6859	£4
68000	£68
74C922	420
8080A	250
8088	£18
8085A	350
81LS95	80
81LS96	80
81LS97	80
81LS98	85
8118	225
8123	125
8155	350
8156	350
8202	£25
8205	225
8212	110
8214	425
8215A 300	300
8216	100
8224	110
8226	250
8228	220
8243	270
8250	860
8251	250
8253	400
8255	255
8256A	£35
8257	400
8259	395
8271	£40
8272	£17
8279	385
8282	460
8283	460
8285	365
8284	350
8287	£17
8288	£10
8T26A	99
8T27-3	150
8T28A	120
8T31	350
8T95N	90
8T97N	90
8364AP	550
9602	220
AM26LS31C	125
AM26LS32A	125
AY 3 1015	£300
AY 3 1270	£675
AY 3 8910	375
AY 5 1013	300
AY 5 1350	388
AY 5 2376	600
AY 5 3600	750
COM8017	275
COM8116	700
DM8131	276
DP8304BN	250
DS3691N	320
DS8830	110
DS8831	125
DS8832	250
E9365	£36
E9366	£36
FD1761	£15
FD1771	£15
FD1791	£22
FD1793	£23
FD1795	£28
FD1797	£28
IM6402	380
INS8060N	1050
INS8154N	£9
MC1488	55
MC1489	55
MC14411	690
MC14412	725
MC3446	215
MC3447P	315
MC3486	175
MC3487	175
MC6846	625
MK3886-2	£7
MM5280D	695
MM5303	635
MM5307	1275
MM5387A	475
MM58174	700
RO 3 2513L	650
RO 3 2513U	600
SFF96364E	800
SP0256AL2	950
TMS27163	725
TMS4164 15	475
TMS4500	£14
TMS4532	350
TMS5100	600
TMS4416	460
TMS9927	£14
TMS9929	£16
TMS9995	£12
ULN2003	75
UPD7002	425
Z80CPU2.5	285
Z80ACPU	300
Z80B	875
Z80CTC	250
Z80ACTC	260
Z80DART	495
Z80ADART	698
Z80DMA	675
Z80ADMA	895
Z80PIO	260
Z80APIO	275
Z80SIO	850
Z80ASIO	900
ZN419CE	180
ZN423E	138
ZN424E	130
ZN425EB	345
ZN426EB	300
ZN427EB	130
ZN428E	410
ZN429EB	210
ZN459	570
ZN1034E	200
ZN1040E	665
ZNA234E	860

74S Series

74S00	30
74S02	30
74S03	32
74S08	40
74S10	40
74S11	60
74S20	40
74S22	50
74S27	40
74S32	70
74S37	60
74S74	75
74S85	295
74S112	80
74S113	90
74S124	300
74S132	110
74S133	60
74S138	100
74S139	115
74S140	60
74S153	182
74S155	39
74S158	195
74S163	300
74S174	250
74S175	320
74S188	140
74S197	400
74S189	140
74S194	195
74S201	250
74S225	240
74S240	300
74S274	390
74S241	250
74S244	290
74S257	170
74S258	250
74S260	70
74S262	850
74S287	225
74S288	210
74S289	200
74S299	540
74S301	000
74S365	250
74S373	400
74S374	365
74S470	325
74S471	620
74S472	1150
74S474	400
74S475	25
74S571	620
74S573	960

75 Series

75107	95
75110	90
75150/64	125
75182/3	99
75118/9	55
75154/9	125
75324	140
75450	86
75451/2	52
75454	70
75491/2	65
74S112	90

74LS

LS00	15
LS02	15
LS04	15
LS08	15
LS10	15
LS11	15
LS13	15
LS14	26
LS19	58
LS20	13
LS22	12
LS27	12
LS32	13
LS30	12
LS30	15
LS38	20
LS42	30
LS47	38
LS48	55
LS63	120
LS73	20
LS74	20
LS75	22
LS85	42
LS86	20
LS90	28
LS91	60
LS92	32
LS93	28
LS125	29
LS126	29
LS138	30
LS139	30
LS148	95
LS151	40
LS153	40
LS156	36
LS157	25
LS158	30
LS159	95
LS175	36
LS240	60
LS241	60
LS242	55
LS243	55
LS244	58
LS245	85
LS273	54
LS362	750
LS364	140
LS373	60
LS374	60
LS393	50
LS471	629
LS640	180
LS641	180
LS645	180
LS668	125
LS669	120
LS670	110
LS673	550

CMOS

4000	10
4001	12
4002	12
4009	24
4010	24
4011	12
4012	16
4016	20
4017	32
4018	45
4023	13
4025	15
4027	20
4034	140
4039	280
4040	40
4042	44
4051	45
4052	60
4053	50
4066	24
4068	14
4069	13
4070	15
4071	15
4072	15
4075	15
4076	50
4077	15
4081	15
4082	15
4093	20
4097	225
4099	75
4160	95
4161	99
4162	99
4163	99
4174	99
4175	105
4411	690
4412	790
4419	350
4450	350
4451	350
4490	350
4500	675
4501	75
4504	75
4505	185
4508	130
4511	46
4512	45
4519	30
4526	60
4528	60
4532	50
4549	375
4569	175
4583	90
4584	40
4585	70
4597	330
4598	290
4599	290
40101	130
40105	105
40106	35
40108	198
40109	100
40110	225
40114	240
40163	50
40193	95
40244	195
40246	195
40373	160
40374	245
45106	595

SEIKOSHA GP-700

The Colour Printer that has broken all price barriers.

A 7 colour graphic printer at the price of a standard Dot matrix printer. Its unique 4 hammer method enables text and high res graphics to be drawn in 7 basic colours or 30 shades. 7 × 8 matrix. Upto 106 char. per line at 50 CPS. Variable line spacing to 1/120". Tractor or Friction feed. Centronix interface standard.

Special Introductory Offer: Only: £399

BBC MICRO & UPGRADE KITS

Upgrade your BBC Micro with our Upgrade & Kits and save yourself £sss...

- Model A £299 (incl. VAT)
- Model B £399 (incl. VAT)
- 16K Memory (8 × 4816AP-100nS) BBC1 £18.00
- Printer User I/O Port BBC2 £6.98
- Complete Printer Cable 36" £12.00
- Disc Interface Kit BBC3 £85.00
- Analogue I/O Kit BBC4 £6.45
- Serial I/O Kit BBC5 £6.70
- Expansion Bus Kit BBC6 £6.10
- Model A to Model B Upgrade Kit £43.00
- Joysticks for BBC (per pair) £12
- Complete range of Connectors & Cables available. Send SAE for list.

We specialise in BBC Peripherals, Software and Accessories. Just phone us for your requirements.

Now available BeebPlot; BeebMon; BeebProgrammer; Beeb 62 File DOS; Beeb 13 ROM Socket; BeebPlotter, etc.

Send SAE for our comprehensive BBC MICRO leaflet.

FLOPPY DISC DRIVES



- 12 Months Warranty on DRIVES
- TEAC CS-50A Single Cased 40 track S/sided 100K £170
- CS-50A Twin Cased 40 track S/sided 200K £340
- CS-50E Single Cased 80 track S/sided 200K £250
- CD50E Twin Cased with PSU, 80 track, 5¼" S/S 400K £475
- CS50F – Single Cased with PSU, 80 track, 5¼" D/S 400K £330
- CD50F Twin Cased with PSU, 80 track 5¼" D/S 800K £599
- MITSUBISHI SLIM LINE: Uncased. Double sided, Double Density, ONE MEGA-BYTES. Track Density 96TPI, Track to Track access time 3mSec £220
- SINGLE MITSUBISHI Slim Line, Cased with own PSU. 1 Megabyte £299
- TWIN MITSUBISHI Slim Line, Cased with own PSU. 2 Megabytes £575
- Drive Cable for BBC: Single £8; Double £12
- 10 Verbatim Diskettes 5¼" DSSSD (5 yrs warr) £20
- VERBATIM or 3M DISKETTES (2 years Warranty) 10 × 5¼" SSSD £18; DSDD £30 10 × 8" SSDD £28.

N.B. Carriage is extra.

NEC PC8023-C

Bi-directional, 80 column, 100CPS, Logic seeking, Hi-Res, block graphic Forward and Reverse line feed, proportional spacing, true descenders, 2K buffer, at a giveaway price:

Only: £320 (carr. £7)

SEIKOSHA GP100A

Unihammer Printer, gives normal and double width characters as well as dot resolution graphics 10" Tractor feed. Parallel interface standard. **£175 (£7 car.**

SEIKOSHA GP250X **Only: £235 (£7 carr.)**

BROTHER 8300 DAISY WHEEL PRINTER/TYPEWRITER

Provides very high quality type in any six interchangeable style typefaces. It is therefore ideal for business use. Portable. Can also be used as a stand alone typewriter. Centronics interface standard. Friction feed; 11 CPS; 12" max width; 5 different colour ribbons. Hard Cover with carrying handle. **Only: £399**

Just 'phone your order through, we do the rest.

EPSON

PRINTERS

EPSON RX80 100 CPS, 9 × 9 matrix, dot addressable graphics, Condensed & Double width printing, Normal, Italics & Elite Char. Tractor Feed, Bi-directional, logic seeking, Centronics Interface standard. Only: **£295 (£7 carr)**

FX80 10" Tractor/Fiction Feed, 160 CPS, bidirectional, logic seeking, 9 x 9 matrix, hi-res bit image, normal & Italic & Elite Char. Super & subscript, Proportional spacing. **£395 (£7 carr)**

MX 100FT/3 136 columns, 15" carriage, plus all the facilities of MX80FT/3. **Only: £425 (carr. £7)**

ACCESSORIES

- **TEX EPROM ERASER.** Erases up to 32 ICs in 15-30 min. £33
- **TEX EPROM ERASER** with incorporated Safety Switch £38
- **Electronic Timer** Solid state. Connects directly to above Erasers. Protects your expensive Chips from overcooking. Our timer pays for itself in no time. £15
- **Tex Eprom Eraser** including the Electronic timer. £44
- **Spare** UV lamp bulbs £9
- Power supply regulated, overload protection variable: 5V to 15V @ HA £38
- **Multirail psu** kit including Case. Output: +5V 5A; -12V, -25V, -5V, -12V @ 1A. **Only £39 (p&p 95p)**
- Attractive Beige Brown **ABS CASE** for ~~Superboard UK101 or Home Brew~~ £26
- **C12 Cassettes** in Library Cases 40p
- **8" Fan fold paper** (1000 sheets) £7
- **9" Fan fold paper** (1000 sheets) £7
- **Teleprinter Roll** 250p
- **UHF Modulator 6MH2** 350p
- **UHF Modulator 8MH2** 450p
- **Stack Pack** the unique stackable twin drawer racking system for Computer Cassettes. 5 Drawers (10 sections) including 10 × C12 Computer Cassettes and Labels £6.00

CRYSTALS

32.768KH	100	16.0MHz	200
1MHz	275	18.0MHz	180
1.6MHz	302	18.432M	150
1.8MHz	395	19.968M	150
1.843M	200	20.0MHz	200
2.0MHz	225	24.0MHz	170
2.2768M	160	24.930M	325
2.5756M	165	48.0M	375
3.0864M	360	100.0M	375
3.0MHz	150	100kHz	236
3.4336MH	180	1.28MHz	392
3.5MHz	160	2.4576M	200
3.6MHz	140	3.276MHz	160
4.032MHz	290	4.194304	200
4.433619	160	4.80MHz	200
4.9152M	200	5.185MHz	300
5.0MHz	160	5.24288	390
5.0688MH	200	7.7328M	250
6.0MHz	350	8.0933M	395
6.144MHz	160	8.86723	175
6.5536M	200		
7.0MHz	160		
7.168MHz	160		
7.68MHz	200		
8.0MHz	350		
9.0MHz	200		
9.625M	450		
10.0MHz	175		
10.7MHz	350		
10.24MHz	200		
12.0MHz	175		
12.5MH	400		
14.31818	170		

IDC CONNECTORS

Speed block type	PCB Plug with latch Strt Pins	PCB Plug with latch Angle Pins	Female Header Socket	Female Card Edge Connectors
10 way	90p	99p	85p	120p
16 way	130p	150p	120p	p
20 way	145p	166p	125p	195p
26 way	175p	200p	150p	240p
34 way	205p	236p	160p	320p
40 way	220p	250p	190p	340p
50 way	235p	270p	200p	395p

JUMPER LEADS Ribbon Cable Assembly DIL Plug (Headers)

Single Ended Lead 24" Long

Length	14pin	16pin	24pin	40pin
24"	145p	165p	240p	325p

Double Ended Leads:

6"	185p	205p	300p	465p
12"	198p	215p	315p	490p
24"	210p	235p	345p	540p
36"	230p	250p	375p	595p

IDC female receptacle jumper leads

	20way	26way	34way	4way
36" 1 end	160p	200p	260p	300p
2 end	290p	370p	480p	525p

DIL SOCKETS

	Low Prof	Wire Wrap
8pin	8p	25p
14pin	10p	35p
16pin	10p	42p
18pin	16p	52p
20pin	16p	52p
22pin	25p	70p
24pin	25p	70p
28pin	28p	80p
40pin	30p	99p

RIBBON CABLE

Ways	Grey	Colour
	Price per Foot	
10	15p	28p
16	25p	40p
20	30p	50p
26	40p	65p
34	60p	85p
40	70p	90p
64	100p	135p

DIL PLUGS (Headers)

	Solder	(IDC)
14 pin	40p	99p
16 pin	49p	105p
24 pin	88p	170p
40 pin	250p	265p

AMPHENOL PLUGS

24way IEEE	475p
36way Centronics Parallel	485p

ZIF DIL SOCKETS

24way	575p
28way	750p
40way	975p

VIDEO MONITORS

- ZENITH 12" Hi-Res, Green Monitor, 40/80 column select switch. Attractively finished £75
- MICROVITEC 1431. 14" Colour Monitor. RGB Input. Cable included £249
- KAGA RGB 12" Standard Res. Colour £199
- KAGA RGB 12" Medium Res. Colour £240

EURO (DIN) CONNECTORS

	Female Strt Angle Pins	Female Strt Angle Pins	MALE Strt Angle Pins	MALE Strt Angle Pins
DIN41617 31way	170p		175p	
41612 A B 2-32way	275p	–	220p	285p
41612 A C 2-32way	295p	340p	240p	300p
41612 A B C 3-32way	360p	385p	260p	395p

EDGE CONNECTORS

	.156"	.1"
TWO ROWS		
2 × 18way	145p	180p
2 × 22way	200p	199p
2 × 23way		185p
2 × 25way		225p
2 × 28way		210p
2 × 30way		245p
2 × 36way		295p
2 × 40way		315p
2 × 43way		395p

D CONNECTORS: Miniature

	Male 9way	15way	25way	37way
Solder	80p	110p	160p	250p
Angle	160p	210p	250p	355p
Pins	120p	130p	195p	295p
Female				
Solder	110p	160p	210p	350p
Angle	165p	215p	290p	440p
Pins	150p	180p	240p	420p
Covers	85p	80p	80p	100p

IDC 25way 'D' plug 385p Skt 450p

● Circle No. 103

Pascal semicolon

IN YOUR JUNE 1983 issue, page 7, John Robinson writes that the statement

```
if x = y then if w = z then a: = 1;
        else b: = 1;
```

is a correct Pascal statement. This is not true, see the book by Jensen-Wirth, *Pascal. User Manual and Report,* page 26, "Caution: there is never a semicolon before and else." Hence, the text:

```
if p then begin S1; S2; S3 end; else S4
```

is incorrect. Perhaps even more deceptive is the text:

```
if p then; begin S1; S2; S3 end
```

Here, the statement controlled by the if is the empty statement between the then and the semicolon; hence, the compound statement following the if statement will always be executed.

The syntactic ambiguity arising from the construct:

```
if <expression-1> then if <expression-2> then <statement-1>
        else <statement-2>
```

is resolved by interpreting the construct as equivalent to

```
if <expression-1> then
  begin if <expression-2> then <statement-1>
        else <statement-2>
  end"
```

Hence, the correct form of the statement above is:

```
if x = y then begin if w = z then a: = 1 end
        else b: = 1
```

or

```
if x = y then begin if w = z then a: = 1; end
        else b: = 1;
```

In the second case, there are two statements between begin and end: the statement if w = z then a: = 1 and an empty statement. In both cases, there is not a semicolon after b: = 1 because "Pascal uses the semicolon to seperate statements, not to terminate statements; i.e. the semicolon is NOT part of statement." Jensen-Writh, *Pascal. User Manual and Report,* page 22.

Katalin Bauer,
Budapest,
Hungary.

Formcalc

BRIAN LAW'S excellent program in the July and August issues is going to be very useful to me. However I have two difficulties.

First, in the example shown in the article when entering the formula shown under the RF command — I summed column 1(Load) first — results in Error 2/1650 repeatedly. Formulae of the type K1*K2*K3/4 work very well, but as soon as I use powers in something like K1*(K2**K3)/4 — again meaningless except as an example — I get Error code C/1650.

Cursor shift 8, column shift to the right, does not work but cursor shift 5, to the left, does.

Can you throw light on this for an elementary programmer like me? Incidentally, I have altered line 2305 to give results to four decimal places — it works very well.

Leon Jeavons,
Birmingham.

Brian Law replies:
It is difficult to debug programs without having the tape itself. The most likely explanations are:

- line 1840 probably has the ** missing;
- line 1310 probably has = "B" instead of = "8"

Changing the number of decimal places can be done on a more permanent basis using the amendments below. To change the number of places now, enter DP3 to get three places of decimals, or DP4 to get four, or DP0 to get none, etc.

Formcalc.

```
25 LET DP=2
296 IF I$(1 TO 2)="DP" THEN GOTO 2500
2305 PRINT AT R1+2,C(V);(INT(@(R,C)*(10**DP)+.5)/(10**DP)
2405 PRINT AT 20,C(V);(INT(@(N,C)*(10**DP)+.5)/(10**DP)
2500 REM CHANGE DECIMAL PLACES
2505 LET DP=VAL I$(3)
2510 GOTO 1315
```

Basicode plea

I WOULD like to draw everyone's attention to a new Basic language called Basicode-2, which creates a way to exchange software between different computers. The computers are Apple II, BBC Micro, Commodore Pet 2001 and Vic-20, CP/M systems, DAI, Exidy Sorceror, Ohio Superboard, Philips P-2000, Sharp MZ-80, SWTPC-68000, Tandy TRS-80 and Video Genie.

The Basicode-2 language contains statements which are the same for all the computers. By using a translation program, which is different for all of them, your micro can understand them. If you have a program in your own Basic you can change it to Basicode-2 by using another translation program; so by using this language you can share your neighbour's programs. I think *Practical Computing* should use Basicode-2 in Open File so more people can use the programs.

Basicode-2 has been developed by NOS Hobbyscoop. It has a program on Radio Nederland every Sunday evening from 19.15 to 19.45 on 747KHz medium wave, and each week it broadcasts a Basicode-2 program. You can order the translation programs and some Basicode-2 programs, plus a manual for 30 florins — about £6. The address is NOS-Hobbyscoop, PO Box 10, 1200 JB Hilversum, Nederland. Alternatively write to me.

Michel Smit,
Zwaagdijk 152D,
1683 NN Zwaagdijk-oost,
Nederland.

The editor replies:
The manual is in both English and Dutch. Basicode is also used by Jonathan Marks on his English-language programme, Media Network, broadcast on Thursday nights on the Dutch International Service, and rebroadcast on the short wave world wide. So far 1200 baud has proved too much for short wave use, and experiments are continuing at 300 baud. For details contact Jonathan Marks at Radio Netherlands, PO Box 222, 1200 JG Hilversum, The Netherlands.

Incidentally, payment for Basicode must be in Dutch Guilders and payable to Nos Algemeen Secretariaat. The book and cassette weigh 370g, so send 25florins plus appropriate postage.

Practical Computing has followed the progress of Basicode with interest, but we have had no requests for coverage from outside the Netherlands. Open File programs would be easier to translate if people wrote more structured programs with sufficient REM's to give outsiders a chance. However, machine-specific tricks seem more popular.

Calculating PI

I WRITE with reference to R A Fairthorne in the Feedback section of the August issue. He seems to have taken my criticism, which I hoped was constructive, to heart. I was merely wondering why he wishes to approximate PI using such a long and tedious division.

Perhaps there is something to be gained from using his method, an unforseen advantage. It may be faster, depending on the computer he is using, but I think I would rather enter the value of PI directly than use his division. The advantage of using my method

(4★ATN (1))

is that it is easy to remember and will evaluate to as many places as the computer can handle.

Perhaps you could have a competition to find the fastest and easiest method of calculating PI? Does anybody know what the exact value of PI is?

S Mehew,
Lanarkshire,
Scotland.

Reader survey

I AM WRITING to you for assistance in writing a series of articles to illustrate how micro

(continued on next page)

(continued from previous page)
computers are playing an increasingly valuable role as a low-cost aid to management and as fast information providers.

Can I ask readers to write to me with their experiences of installing a micro at work, be it a ZX-81 or an IBM. What problems have they encountered in software and hardware? Did the salespeople know what they were selling? Did, and was the buyer aware of the limitations of the computer he was being offered? Was the software adequate for the task it was bought for? If not, what difficulties were encountered to get the software or hardware working correctly?

What questions, in hindsight, would readers ask the salesperson if they had the opportunity to purchase again? Finally, and I think most important, what benefit have they received by installing a micro?

I would be most grateful to readers if they would write to me, all replies will be acknowledged by return of post.

Tom Mcgowran,
Monmouthshire Beacon,
50, Monnow Street,
Monmouth NP5 3XJ.

Epson solution

IN HIS ARTICLE on the Epson FX-80, August issue, page 77, Chris Roper mentions the warning in the Epson manual about control codes that cannot be sent out by certain versions of Basic. Chris points out that Epson do not propose a solution to this problem.

The authors of the Epson manual must have had in mind such quirks as CHR$(9), which Microsoft Basic interprets as a tab character which it expands to a string of spaces.

The solution is easy, at least it is if you are using an RS-232 interface with mark parity. You simply set the high-order bit of the control character to one. The easist way to do this is to add 128 to the number. Thus CHR$(9) becomes CHR$(137). The Basic interpreter does not recognise this as a tab; the interface strips the high-order, parity, bit; and the Epson, or other output device, receives CHR$(9) — so everyone's happy.

Mike Lewis,
London NW3.

Keen on sprites

IN YOUR JULY issue you gave a very useful program for editing sprites on the CBM 64 called 64 Sprite Editor. Being somewhat of a novice myself I was keen to utilise this program as very few magazines seem to publish, little if anything for the 64 anyway — hint, hint.

I did everything to the letter. That is, I turned the computer off and on, entered

Poke 2560,0 Poke 44, 10 return

and started typing from line 30. However, immediately on pressing return after finishing line 30, the thing just crashed and the keyboard was completely disabled.

I blamed myself for this error and tried again — and again and again, repeating the instructions as per Mr Irving's article. Still no luck, so am I to blame or is there something else Mr Irving should have mentioned? Can you help — please.

Finally, I enjoy your magazine but you seem slightly biased towards BBC, Tandy, Apple, etc.

E G Reynolds,
Lancashire.

Blunders

IN THE ARTICLE on programming sprites on the Commodore 64, in page 99 of the July issue, we unfortunately missed out two important instructions. The two Pokes entered after turning the machine on should be followed by New <Return>.

We would also like to repeat that lines 10 to 23 must be typed exactly as listed, the important feature being the number of characters entered. In the August issue, Atari Open File, page 145, line 32115 of Les Kneeling's Slow Lister program should have ended "Poke 842,12".

Indian user club

WE HAVE formed a home computer user's club in India. We meet twice a month to exchange the latest news and to try and solve members problems. Owners/users of any home computer are welcome. We have developed a music program for the ZX-81 and a battery back up. In the near future we hope to bring out a 64-column card for the ZX-81.

Arun K Nath,
New Delhi,
India.

BBC corrections

I ENTERED the disassembler program, *Practical Computing,* January 1983, in my BBC micro with the modifications printed in the March 1983 issue. I have two corrections to communicate to other readers.

First, line 260 seems to be a little unlucky; it may have been printed a first time without a part and then wrongly corrected by M Cresswell in the March issue. The definitive — I hope — version will be:

That is the 10th value has 4 "." because the branch instruction set is printed with a 16-bit destination address.

Secondly, the addition by E Ibbotson contains a mistake; in fact, line 1520 must end with

MO$ = OS$(I%)

instead of

MO$ = O$(I%)

That is MO$ must contain the name of the OS call, not the address.

With these corrections the disassembler runs very quickly and with a very nice editing.

P Jenne,
Milan,
Italy.

Spectrum Scrabble

IN HIS REVIEW of computer Scrabble for the Spectrum, Bill Bennett expressed doubt on the validity of four particular words.

According to Chamber's *20th Century Dictionary,* the national Scrabble championship's standard reference guide, while "reiner" cannot be found, definitions of the other three read:

agaze, (arch) adj. and adr. at gaze, gazing

noon. — v.i. to rest at non. — n. nooning — (esp. U.S.) a repast or rest about noon.

(continued on page 13)

BBC correction.

```
260 DATA "A          ","#&..    ","&..     ",
         "&...X  ","&...Y  ","&....  ",
         "&....X","&....Y","          ",
         "&....  ","<&...X","<&...Y",
         "<&....)"
```

sinclair special 4

Inside... Two special offers... Six new software titles... Microdrive!

Something for everyone, from Sinclair!

Welcome to another Sinclair Special. Even if you're not yet a Sinclair owner, I believe you'll find something of interest in this latest issue.

For instance, if you're looking for the best way to begin computing, turn to our back page. You'll see that leading Sinclair retailers are now offering the popular ZX81, complete with a 16K RAM Pack *and* a free software cassette, all for £45. That means savings of at least £29 on one of the world's all-time best-selling computers.

Those same retailers are also offering the ZX Printer at its regular price of £39.95, but accompanied by a *free* 5-roll Paper Pack, worth £11.95.

If you want to add even more speed and versatility to your ZX Spectrum system, you'll be pleased to hear that the new ZX Microdrive has now been officially announced.

Microdrives are being released on an order of priority basis. Spectrum owners who purchased direct from us will be sent order forms, in a series of mailings that begin with the earliest names on our list of Spectrum owners. If you didn't buy direct from us by mail order, send us your name and address (use the coupon in this Sinclair Special). We'll add your name to the list, and send you a colour brochure and details on how to order.

Finally, if you're looking for more ways to use your ZX system, take a look at the software opposite. There are programs for programmers, a space-chase and car race for arcade-game players, a brand new logic game for those who've exhausted 'the cube.'

The Cattell IQ Test is based on the definitive professional psychologists' test – and forms an accurate but easy way of measuring your own IQ. All the new programs are available direct from us, through the order form in this issue.

You'll see what I mean about Sinclair having something for everyone. And we'll have even more to show you at two forthcoming exhibitions: the PCW Show at the Barbican Centre, from September 28th to October 2nd, and the Great Home Entertainment Spectacular at Olympia, from September 17th to 25th.

Nigel Searle

Nigel Searle, Managing Director
Sinclair Research Ltd.

ZX Microdrive System preview!

ZX MICRODRIVE

At least 85K bytes storage, loads a typical 48K program in as little as 9 seconds: £49.95.

ZX MICRODRIVE CARTRIDGE

Compact, erasable, revolutionary. Complete with its own storage sleeve. Contains up to 50 files, with a typical access time of 3.5 seconds: £4.95.

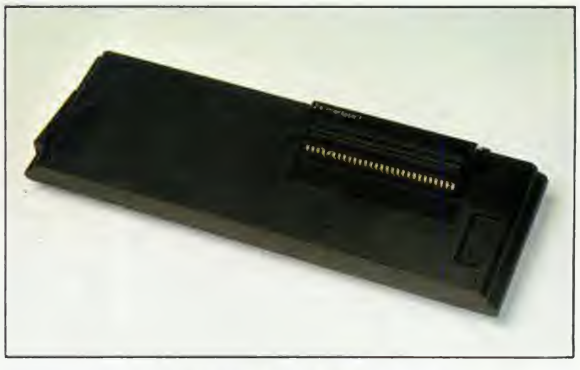

ZX INTERFACE 1

Necessary for sending and receiving information from ZX Microdrive. Includes RS232 interface and local area network facility for 2 to 64 Spectrums. Attaches to the underside of your Spectrum. Purchased with ZX Microdrive, just £29.95. As separate item, £49.95.

PSYCHOLOGY, GRAND PRIX RACING, BRAIN TEASING, PROGRAMMING, SPACE-BLASTING!

Sinclair have it all taped with six brand-new programs for ZX Computers!

Chequered Flag
For 48K RAM Spectrum. **£6.95**

Have you ever wanted to drive a Formula One car flat-out round a Grand Prix circuit? With Chequered Flag you'll need one eye on the road and one eye on the instruments, as you steer and brake to avoid hazards, and work through the gears in search of the lap or race record. This outstanding new program puts you in the driver's seat with stunning realism, and gives you a choice of three cars and ten different circuits. Don't crash!

Mothership
For ZX81 with 16K RAM. **£4.95**

Scream down the claustrophobic confines of the Zarway. Engage suicidal drone fighters in deadly laser combat. Dodge, duck and dive in a high-speed 3-D race to attack the evil Mothership before she claims your home planet. Mothership is a truly tough challenge, and fast, furious fun!

Cattell IQ Test
For 48K RAM Spectrum. **£12.95**

Although there are a number of so-called self-administered IQ tests on the market, the only reliable way of finding your IQ has – until now – been to visit a qualified psychologist and take a battery of tests – for a fee. Now Victor Serebriakoff, International President of Mensa, has produced Professor Cattell's test in a form which enables you to use your ZX Spectrum to test your IQ.

The Cattell Scale IIIA test is timed by the computer, marked immediately, and the marks standardised against your age. This is the first time that an accredited, standardised test has been available to the general public.

Zeus Assembler
For 48K RAM Spectrum. **£12.95**

A powerful and easy-to-use programming aid, designed to simplify the entire process of producing machine code programs, enabling you to write in assembly language instructions. Comes complete with comprehensive range of support facilities.

Monitor and Disassembler
For 16K & 48K RAM Spectrums. **£12.95**

This powerful Disassembler translates machine code into comprehensible assembly language instructions, allowing you to examine the BASIC ROM, to investigate the workings of the Spectrum or to analyse your own machine code routines.

With the highly versatile Monitor, you get an extensive set of facilities to aid the entry, inspection, modification and debugging of your own machine code programs.

Flippit
For 16K or 48K RAM Spectrums. **£9.95**

Like those cube games, Flippit looks simple. But its fiendish ingenuity results in the ultimate game of logic and patience. Twist, turn and swap the nine Flippit pieces in search of the elusive magic square. But be warned, those pieces can be arranged in *millions* of combinations...

TWO SPECIAL OFFERS FROM SINCLAIR

STARTER PACK: £45

Powerful passport to home computing – now at the lowest price ever!

ZX81

Sinclair ZX81 – 900,000 sold so far.
Touch-sensitive keyboard... black and white graphics... just plugs into most TV sets.
With 212-page BASIC manual – step-by-step guide to the world of personal computing.
Normal price £39.95.

ZX 16K RAM PACK

Gives the ZX81 more power – the power to run sophisticated software like Flight Simulation and Chess. Normal price £29.95.

CASSETTE

Worth £4.95 or more. In every starter pack, there's a top-flight 16K cassette – like Chess or Fantasy Games or one of the valuable education series. Actual title varies with availability. And once you own your starter pack, there are 37 other Sinclair cassettes available (plus dozens from other manufacturers).

Look for the special packs at WH Smith, Boots, John Menzies, Currys and other leading Sinclair stockists. Not available by mail order.

Offers subject to availability while stocks last.

ZX PRINTER AND FREE 5-ROLL PAPER PACK: £39.95

ZX PRINTER

Designed exclusively for use with the Sinclair ZX81 and ZX Spectrum personal computers. Printing speed: 50 characters per second. 32 characters per line, 9 lines per vertical inch. Plus graphics direct from screen. Now with a *free* pack of 5 rolls of special paper (normal price £11.95).

sinclair

Sinclair Research Ltd, Stanhope Road, Camberley, Surrey, GU15 3PS. Telephone: (0276) 685311.

How to order

Simply fill in the relevant section(s) on the order-form below. Note that there is no postage or packing payable on Section B. Please allow 28 days for delivery. Orders may be sent FREEPOST (no stamp required). Credit-card holders may order by phone, calling 01-200 0200, 24 hours a day. 14-day money-back option. ZX81 Starter Pack and Printer and Paper offers are not available by mail order.

To: Sinclair Research Ltd, FREEPOST, Camberley, Surrey, GU15 3BR.

ORDER FORM

Section A: hardware purchase

Qty	Item	Code	Item Price £	Total £
	ZX Spectrum – 48K	3000	129.95	
	ZX Spectrum – 16K	3002	99.95	
	Postage and packing:	0029	4.95	
			TOTAL £	

ZX81 Starter Pack and Printer and Paper offers are not available by mail order.

Section B: software purchase

Qty	Cassette	Code	Item Price £	Total £
	FOR SPECTRUM			
	L4/S Monitor & Disassembler	4403	12.95	
	L3/S Zeus Assembler	4402	12.95	
	G26/S Flippit	4025	9.95	
	P1/S Cattell IQ Test	4500	12.95	
	G31/S Chequered Flag	4030	6.95	
	FOR ZX81			
	G26 Mothership	2125	4.95	
			TOTAL £	

Signature

*Delete/complete as applicable.

*I enclose a cheque/postal order made payable to Sinclair Research Ltd for £

*Please charge to my Access/Barclaycard/Trustcard account no:

Mr/Mrs/Miss

Address

PRC 910

(Please print)

● Circle No. 104

ZX Microdrive information request

Please add my name to the Microdrive Mailing List, *and* send me a colour brochure with full specifications of ZX Microdrive/Interface 1 ☐ *(tick here)*. You can use the above form to send us your name and address.

Our Feedback columns offer readers the opportunity of bringing their computing experience and problems to the attention of others, as well as to seek our advice or to make suggestions, which we are always happy to receive. Make sure you use Feedback — it is your chance to keep in touch.

(continued from page 8)

tyre — v.t. to put a tyre on. — n. tyring

Ian Tresman,
Elstree,
Hertfordshire.

Bad timing

IT WAS WONDERFUL to see that the Newbrain was at last given a place in your excellent magazine. I, and many other Newbrain owners in this country, sincerely hope that this will become a regular feature.

L J Fourie,
Pretoria,
South Africa.

Logo

I AM PREPARING a book on the use of Logo in the classroom. The book is primarily aimed at primary school teachers, but will have some relevance to lower secondary school as well.

I would be very interested to hear of any experiences teachers have had using Logo in the classroom, and ways and means they employ to introduce the skills and concepts of computing to different age groups of children. This can include games, etc. All contributions will be acknowledged and postage refunded.

A P Mullan,
54 Copse Road,
Plympton,
Devon.

Euromouse

I AM GLAD that my write up on the Computer Fair Euromouse heats did not miss the boat entirely, despite its long delay in the post. I am sorry that it had to be cut down to fit the remaining space; particularly sorry that an acknowledgement of the Judges' efforts did not appear.

Professor Harry Prime of Birmingham University, Chairman of the Computing and Control Division of the IEE did a splendid job of ensuring technological fairness. While Brian Glover, well known TV actor and the voice behind the Tetley Tea folk asked the contestants some searching questions, Chris Hipwell, publisher of *Practical Computing*, lent an air of authority to the judging.

I have already had an encouraging response to the announcement of a robot ping pong contest, which appeared in May 1983 issue of *Practical Computing*. Over two dozen letters have arrived including one from South Africa and one from Nato headquarters. They stress that their robot will not be an official project, nevertheless, if this letter is read by a robot enthusiast in the Kremlin we might see a needle match.

John Billingsley,
Portsmouth Polytechnic.

Loading trick

I MUST SAY how very much I enjoyed the maze program by Andrew Armstrong in the August issue of *Practical Computing*. There is no need, however, for you to exclude it from your games-of-the-year disc. I find that a short loading program seems to do the trick without causing any problems

Give the program a suitable name, for instance, Mazel and save it on disc along with the main maze program. To use, Chain "Mazel" which will then automatically load then relock the main program. You will get an error message "Bad Mode at line 20". Ignore this, type Run and press Enter. The program should then run perfectly.

I expect other readers will have devised other methods, but I hope you find this useful.

R Dent,
Harrow,
Middlesex.

Loading trick.

```
10 *KEYO LO."MAZE"!M*TAPE12!MF.T=0 TO TO
P-PAGE STEP 4:T!&E00=T!PAGE:N.T!PAGE=&E0
0!MRUN!M
20 *FX138,0,128
```

LONDON COMPUTER CENTRE

SIRIUS 1

1.2 Mb Disk Storage **£2195**
2.4 Mb Disk Storage **£2695**
10. Mb Disk Storage **£3995**

NEC ADVANCED PERSONAL COMPUTER

16 bit 8086 128K Ram
2.4Mb Disk Storage
CP/M86 – MS DOS
From £1985

EPSON QX10

192K RAM
£1735
Upgradeable to 256K

Multi Fonts
Zoom
Graphics

SENDATA 800 SERIES ACOUSTIC COUPLER
£220

- Compact, lightweight, portable
- 10 hours operation from the rechargable batteries
- 300 BPS answer/originate
- Handset sensor on/off switch
- New crystal controlled circuitry
- B. T. Approved.

SUPERBRAIN 2



Dedicated Wordstar Keypad
from £1865

New TANDY Model 4

CP/M 3.0
64K-128K RAM
from £1299

TELE-VIDEO 806/816

the Multi User Computer System

PORTABLES

EPSON HX20
Portable with built-in printer
from £402

TANDY 100
Portable with built-in 4 Programmes: Word Processor, address book, scheduler, and communications. Large 40 x 8 char. line display
£433

OSBORNE 1

Double density
£1350

New ZORBA



Portable
full 80 x 20 display
800K disc storage
£1595

FLOWRITER RP 1600
60 CPS
Fast and reliable 8K buffer
£1600

TEC F10 40 CPS

Diablo 620 compatible
Japanese reliability
£1250

New JUKI 6100 Daisywheel 18 CPS

Bi directional
Adler daisywheels
Diablo 630 protocols **£399**



3 in One TOSHIBA P1350

24 Needles - high speed drafts 190 CPS Letter Perfect Printing 100 CPS Addressable Pin Graphics **£1130** Options: Tractor **£87:** Sheet feeder **£520**

EPSON FX80 160 CPS

OKI 84 200 CPS

£850

3 TRAY AUTO SHEET FEEDER

For originals, copies and envelopes.
£695

SINGLE SHEET FEEDER £375

New SHINWA CP 80 MATRIX PRINTER

80 CPS Friction and Tractor inc. interface cable and paper **£250**

SUITABLE FOR MOST DAISY PRINTERS

All prices are Exclusive of VAT and Delivery. Dealer Enquiries invited on all Products.
Large range of CPM Software available. Please phone for Prices.
Demonstrations on all models.

43 Grafton Way, London W1P 5LA (Opposite Maples)
Opening Hours: 10-7 Mon-Fri. 12-4 Sat.
01-387 4455 (4 lines) Telephone Answering Service After Office Hours Telex: 8953742

Introducing The Tandy®

Micro Executive Workstation

- Powerful Built-In Software
- Retains Memory Data When "Off"
- 8K RAM— Expandable to 32K

£499
8K RAM
Cat. No. 26-3801

£649
24K RAM
Cat. No. 26-3802

User Friendly Software Makes The TRS-80™ Model 100 Portable Computer Truly Revolutionary

Imagine a computer on your desk so small, it can fit in your in-tray. The second you turn it on, imagine seeing a menu of built-in executive management programs and your own files, ready for immediate use. All revealed on an eight-line by 40-character LCD display positioned just above a full-size keyboard. And when you leave the office, imagine a four-pound computer you can take along, because it works on mains or batteries.

Stop imagining! The new TRS-80 Model 100 is the computer you've been waiting for. As a desk organizer, it's a phone directory, address book and appointment calendar. It's a personal word processor, as well. There's even built-in communications software to access other computers by phone, using an acoustic coupler.

Come and see the most revolutionary computer since the TRS-80 Model I at over 340 Tandy stores and dealers, including over 25 Tandy Computer Centres nationwide.

● Circle No. 108

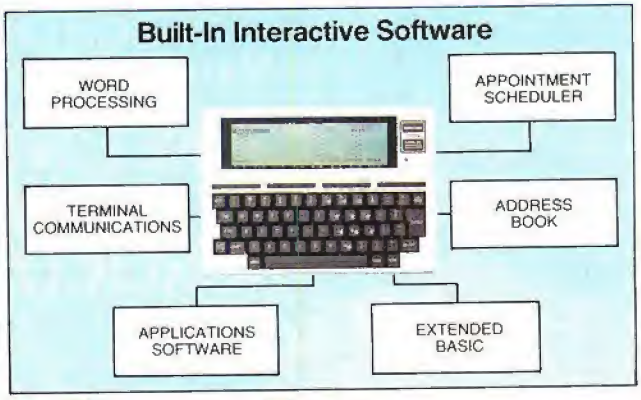

Tandy

The Biggest Name in Little Computers

Call In Today Or Send For Further Information

Computer Marketing, Tandy Corporation (Branch UK), Tameway Tower, Bridge Street, Walsall, West Midlands. WS1 1LA.

Name _____

Address _____

PC7

OVER 20,000 PEOPLE CAN'T BE WRONG

ACT SIRIUS 1

£2,195

Powerful 1.2Mb data storage with 128K RAM and including two of the industry standard operating systems at 16-bit level, CP/M-86 and MS-DOS. PLUS Basic 86.

£2,895

2.4Mb data storage with a big 256K RAM for the really demanding business applications. Includes CP/M-86, MS-DOS and Basic 86.

Above are two very good reasons why more people have bought the ACT Sirius 1 than any other 16-bit microcomputer in the U.K. Here are a few more:

ACT Sirius 1 is a superb user-friendly machine incorporating a comprehensive 'soft' keyboard, a 12" high resolution screen for crisp, clear definition and a wide range of memory options including a 10Mbyte Winchester version and a choice of three plug-in expansion boards.

The range of available software is simply unrivalled in the personal computer field. Over 1,000 software packages now exist to provide complete solutions to the needs of large and small businesses alike.

And of course the ACT Sirius 1 is backed by the strength and resources of ACT. The Pulsar range of true 16-bit software for accounting, planning and word processing; ACT Training Centres open to all; nationwide field service; a full range of printers and consumables. And, the most complete and professional dealer network in the U.K.

Over 20,000 people are rightly convinced that the ACT Sirius 1 is the best machine of its kind in the country.

CAN YOU REALLY AFFORD TO BE WRONG?

ACT SIRIUS 1, THE UK'S BEST SELLING 16-BIT MICROCOMPUTER.

Please send me details of the ACT Sirius 1.

Name:_____

Position:_____

Company:_____

Address:_____

Tel. No:_____

● Circle No. 109
P.C. OCT.

ACT (UK) Limited

Shenstone House,
Dudley Road, Halesowen, West Midlands B63 3NT.
Telephone: 021-501 2284
Telex: 337007


sirius 1
sirius 1

The right software for your application from COMPUTECH

apple
Authorised Dealer
Service Centre
System Consultancy

COMPUTECH FINANCIAL ACCOUNTING PACKAGES

Payroll	£375
Invoicing and Stock Recording	£295
Sales, Purchases and General Ledgers	each £295
Also costing and group consolidation	

COMPUTECH UTILITIES DISK
for reliable error checking copying, diskette scan, interpret and patch, etc £20
VisiCalc, Applewriter and other Apple software (Prices on request)

COMPUTECH CHAIN MAIL
A mailing merging document processor which may be used with text files, including random files and Applewriter 1.1 binary files £45

COMPUTECH GRAPHICS DISK
for printing Apple pictures and graphs on Epson and Microline (free with printers purchased from Computech) £30

COMPUTECH TERMINAL UTILITIES
Apple to Apple and Apple to mainframe from £130

COMPUTECH hardware...just plug it in and go!

switches and jumpers provide hardware options without soldering

DIPLOMAT VIDEO DIGITISER
store a frame from video camera in a fiftieth of a second, process and print — for Apple II £195
for APPLE //e, including 64K Extended 80 Column Card £345
DIPLOMAT PARALLEL Interface £80
DIPLOMAT SERIAL COMMUNICATIONS Interface £85
DIPLOMAT RAM 16 Memory Expansion £95
DIPLOMAT CLOCK/CALENDAR £80
LOWER CASE Character Generator with Applewriter 1.1. enhancements £50
MICROMUX Data Exchange (Max 16 Ports) from £850
MATRIX PRINTERS, Microline and Epson with graphics and up to 200 cps from £222
MICROLINE Optional Character Generator £15
DAISY WHEEL PRINTERS, Olympia, Qume, Ricoh from £798

COMPEC '83
15-18 NOV
OLYMPIA
STAND 718
NATIONAL HALL

Prices exclude VAT, Carriage and Packing

For full details phone for data sheets and a FREE demonstration

COMPUTECH SYSTEMS

168 Finchley Road, London NW3 6HP. Tel: 01-794 0202

• Circle No. 110

Apple Prodos

Apple are releasing a new operating system for the Apple II and IIe called Prodos. Aimed at the professional software developer Prodos resembles SOS, Sophisticated Operating System, as used on the Apple III. Prodos uses the same data formats as SOS and provides a similar Unix-like hierarchical file structure.

Apple DOS will continue to be the standard Apple II operating system, but by releasing Prodos Apple are responding to the need for a better development environment. Apple say Prodos allows larger file sizes, more efficient memory-management, better response times, and that it makes disc-based applications device-independent.

Prodos will not be on general retail sale until early 1984, but it is available now to software developers under licence. For details contact Apple Computer (U.K.) Ltd., Eastman Way, Hemel Hempstead, Hertfordshire HP2 7HQ. Telephone: (0442) 60244.

Micro replaces maths teacher

Fun Mathematics on Your Microcomputer, is by Czes Kosnowski. The book discusses mathematical principles with lots of program examples and games written in a non-machine specific Basic. Published by Cambridge University press at £4.95, ISBN 0 521 274 516.

Olivetti comes in from the cold

MS-DOS can now be obtained along with CP/M-86 for the M-20, Olivetti's heavily promoted 16-bit computer. The two operating systems come together with an 8086 add-on processor card for a price of £200. With the card fitted the M-20 should be able to read IBM PC formatted discs. The MS-DOS is MS-DOS version 1.

The M-20 has until recently been out on something of a software limb. The system is built around the rather unusual Z-8000 processor chip and comes supplied with an Olivetti own-brand operating system. The new processor card turns it into a more conventional machine costing, with the 8086 card fitted, £2,695 for a system with twin floppy drives. Contact: British Olivetti Ltd, 86-88 Upper Richmond Road, London SW15 2UR. Telephone: 01-785 6666.

Last One cheap on Commodore 64

The latest serious software product to become available for the Commodore 64 is DJ 'AI' Systems well publicised program generator, The Last One. At £85, the price is lower than versions of the product for other machines, in line with the lower price of the 64 which doubles as a home entertainment machine.

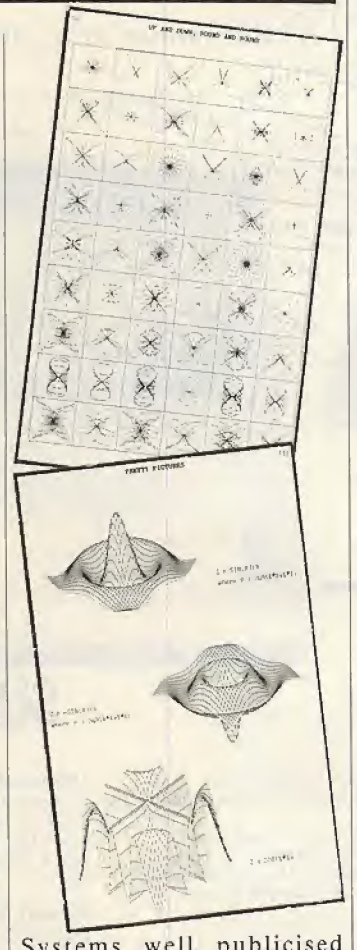

DJ 'AI' Systems has also just released The Last One for the Zenith Z-100 and the Hitachi MB-16001 16-bit machines, this time at the more usual price of £330. Details from DJ 'AI' Systems, Station Road, Ilminster, Somerset TA19 9BQ. Telephone: (04605) 4117.

Ffosswriter

Ffoss's Correspondent Word Processing package for the HX-20, the development of which we described in *Practical Computing*, March 1983 is now on sale. The name has been changed to Ffosswriter because of a name clash with another product, but it is the same ambitious package as described in the "Computing on the Train" feature.

What distinguishes it most from other text-editing packages for the Epson is its disc-like random access handling of the HX-20's microcassette drive. It allows the user to operate conveniently with named documents and makes block copying operations between different documents possible.

Supplied as a plug-in EPROM along with a 50-page reference manual, Ffosswriter runs on the HX-20 with or without the expansion unit fitted, and costs £95. Full details from Ffoss Ltd, 112 Bath Road, Slough SL1 3SZ. Telephone: (0753) 820277.

Apple card

Advanced Logic Systems' CP/M Plus card for the Apple II and Apple IIe is now available in the U.K. At £300 the plug-in processor card is good value, it includes not only the new CP/M Plus operating system from Digital Research but also an extra 64K of RAM, CBasic, GSX Graphics, and various software utilities. The card uses the fast 6MHz version of the Z-80 processor chip. Contact Scope Systems, 13 Carlisle Road, Queens Park, London NW6 6TL. Telephone: 01-969 9365.

Lots of art for the BBC

BBC computer owners have two new drawing packages to chose from. Beeb-Art which is from Quicksilva lets you draw lines or shapes in any of the 16 Mode-2 colours and save them to cassette. It costs £14.95 and comes on cassette for the BBC Model B, with or without joysticks.

Easy Graphics from Hexagon Software is a similar package additionally featuring rubber-band line drawing. Costing £13.50, Easy Graphics also comes on cassette and runs on either a Model A or B machine with at least 32K of RAM. Joysticks are not required.

More details from Quicksilva Ltd, Palmerston Park House,

(continued on page 24)

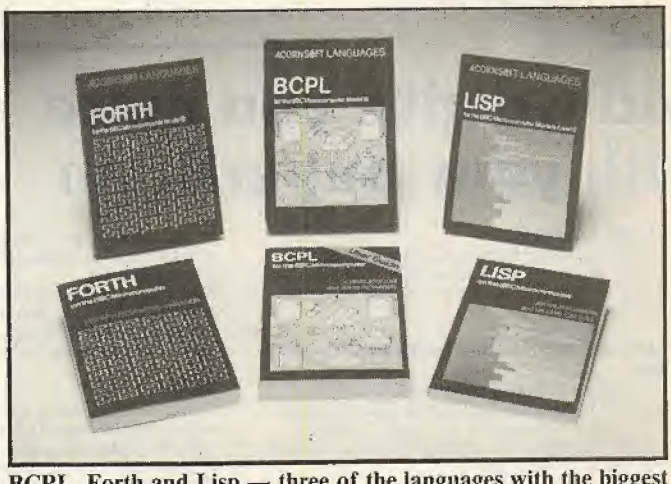

BCPL, Forth and Lisp — three of the languages with the biggest cult followings — are now available for the BBC computer. BCPL is a structured language widely used in universities as an alternative to assembler. Forth is becoming increasingly well known for producing fast, compact code, and is ideal for machine control and graphics applications. Lisp is a list oriented language much used for artificial intelligence research and writing expert systems. Lisp and Forth are available on either cassette at £16.85, or on disc at £19.90. The user guides cost £7.50 each. BCPL is more expensive at £99.95 for a pack containing the run-time system on ROM along with other parts of the system on disc and the user guide. The BCPL user guide costs £15.50 bought separately. More details from Acornsoft Ltd, 4A Market Hill, Cambridge CB2 3NJ. Telephone: (0223) 316040.

THINK SUPERBRAIN

Choosing SuperBrain is good thinking according to hundreds of happy users.

It came out top in an independent survey by beating Apple III, Sirius 16 bit, Zilog MCZ 2

USER BASE	FUTURE
A – fewer than 200	Limited – uncompetitive.
B – fewer than 500	Reasonable – short life and competive
C – fewer than 1000	Good – remaining competitive and expandable.
D – more than 1000	Excellent – very competitive for many years.

and others on price/performance rating, user satisfaction, user base size and prospects for the future.

SuperBrain scored highest — or equal highest — in every respect. Its future was rated "excellent" — very competitive for many years.

All this comes in a compact, single desk top unit.

Training			
Maintenance	Apple	D	Good
Distributor	B	Good	Bad
User base	Good	Excellent	Limite
User satisfaction rating	Reasonable	Excellent	Oc
Price/performance rating	Limited	September	
Future	January	Superbrain II	
WHICH COMPUTER? review issue	Apple III		

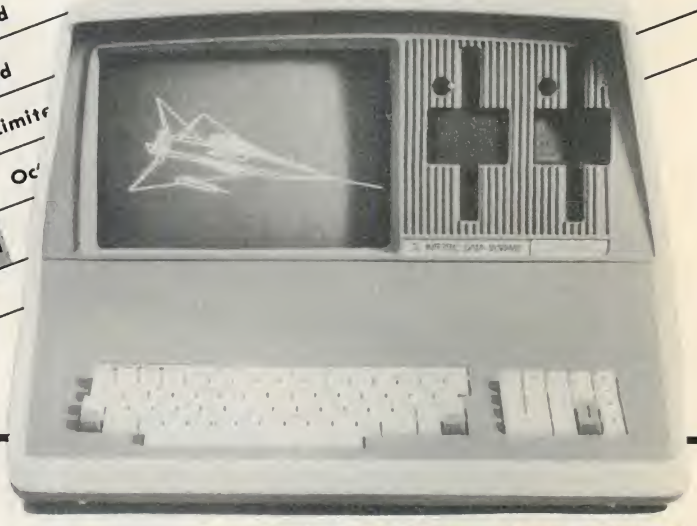

SUPERBRAIN™ INTERTEC DATA SYSTEMS

and we give you more with your SuperBrain

Hard Disk Upgrade
An integral Winchester hard disk upgrade available. Encotel who pioneered this feature have supplied over 200 hard disk SuperBrain systems to companies throughout the U.K.

Increase in Fast Access Storage Capacity E-Store
Add-on Winchester disk sub-system designed and manufactured by Encotel the E-Store offers instant upgrade in storage capacity at low cost. The fitted Rodime disk comes in a range from 5Mb to 40Mb and plugs into many leading micros.

Software
The importance of well supported and commercial software has always been recognised by Encotel.

A great deal of time and effort is spent in the evaluation of new packages before they are added to our product list.
Over the years Encotel have been instrumental in bringing to the U.K. market a number of leading software products for SuperBrain. Our range is wide. There are five programs in the Microsoft range.

Telex
Pioneered by Encotel, the Microtelex unit turns your microcomputer into a telex preparation and handling unit with direct connection to the telex network. While you run your normal day-to-day application Microtelex automatically transmits your messages into the telex network — as well as receiving incoming messages — all in background mode program.

Optional Resolution Graphics
A choice of high or medium resolution graphics available. High resolution: 1024 x 512 Pixel graphics 128K I/O Mapped. Price £660. Medium resolution: 512 x 256 Pixel graphics 16K I/O Mapped. Price £455.

Rental Facility
Encotel have a pool of equipment available for short-term rental at attractive rates. Minimum period is **one week.**
The SuperBrain is available on this basis — rent starts at only £25 per week including printer.
In addition, full leasing facilities can be arranged on all capital equipment.

SuperBrain Dealers

MIDLANDS AND NORTHERN ENGLAND
DUDLEY Independent Systems Ltd 0384 236934
LEICESTER Scilex Ltd 0480 58022
STOCKPORT Microscope 061-499 0431
ST. NEOTS West Com Ltd 0480 217217

LONDON
NORTH LONDON Boyd Microsystems Ltd 01-950 0303
KINGSTON UPON THAMES Ideal Computer Systems Ltd 01 946 5568
LONDON SW1 Direct Data Marketing Ltd (DDM) 01 834 5016
LONDON W1 Bondbest Ltd 01 580 4273/7249
LONDON WC2 Systematica Ltd 01 836 9379

SOUTH EAST ENGLAND
BRENTWOOD Direct Data Marketing Ltd (DDM) 0277 229379
GUILDFORD AFK Associates Ltd 079 82 3758
HORSHAM Sussex Microsystems Ltd 0403 68701

WEST COUNTRY
MELKSHAM Advent Data Products Ltd 0225 706289

WALES
GWYNEDD C.P.L. Ltd 075 881 2053

IRELAND
CASTLEBAR Delta Microsystems Ltd Castlebar 22632
GALWAY Associated Micros Cork (021) 871669
Galway (091) 68506

SYSTEMS ENCOTEL
Britain's specialist microcomputer distributors

ENCOTEL SYSTEMS LIMITED 7 IMPERIAL WAY
CROYDON AIRPORT INDUSTRIAL ESTATE
CROYDON SURREY CR0 4RR
Tel: 01 686 9687 01 680 6040 (six lines)
Telex: 8951921 ENCO G

ENCOTEL SYSTEMS (WEST)
77 LALEHAM ROAD
STAINES MIDDLESEX TN18 2EA
Tel: (0784) 63466 Telex: 932905 LARCH G

● Circle No. 111

(continued from page 21)

13 Palmerston Road, Southampton SO1 1LL. Telephone: (0703) 20169. And from Hexagon Software, 17 Straits Road, Gornal, Dudley, West Midlands DY3 2UR. Telephone: (0384) 232992.

Sharp and Tandy statistical forecast

Easi-Trend for the Sharp PC-1500 and Tandy PC-2 pocket computers enables users to identify trends and make forecasts from entered data. The program comes with a manual explaining statistical forecasting, and costs £19.95, including VAT. For more details contact Elkan Electronics, 11 Bury Road, Prestwich, Manchester M25 9JZ. Tel: 061-798 7613.

Specific packages for Commodore

Specific Software has released a range of tape and disc-based programs for the Vic-20 and Commodore 64 to do invoicing and sales and purchase accounts. Specific say the disc versions can handle 300 accounts and up to 2,000 transactions, while the cassette versions are good for 60 accounts and 300 transactions.

Prices range from £20 for a Vic-20 invoicing program to £150 for disc-based sales accounts with integrated invoicing for the Commodore 64. Details from Specific Software Ltd, 10 Farlands Road, Stourbridge, West Midlands DY8 2DD. Telephone: (03843) 73377.

Image analysis system on ACT Sirius

Digithurst's image-analysis system will now work with the ACT Sirius computer. The Microsight image-capture package consisting of video camera, interface box and software achieves a resolution of 256 by 256 pixels and costs £495. The Microscale software suite consisting of programs to manipulate images and measure perimeters and areas costs £295. Versions of the system are available for other micros including the BBC and Pet computers. Contact Digithurst Ltd, Leaden Hill, Orwell, Royston, Hertfordshire SG8 5QH. Telephone: (0223) 208926.

The new software package called The Word processor is not quite what it seems. It is the King James Bible on disc. The complete text is contained on a set of discs along with a program which lets you search the scriptures for any word or phrase you wish to refer to. Apple and IBM PC versions are available from Pete and Pam Computers at £149. Contact Pete and Pam Computers, New Hall Hey Road, Rossendale, Lancashire BB4 6JG. Telephone: (0706) 212321.

Hewlett-Packard integrated packag

MBA, the integrated spreadsheet, graphics and filing package from Context can now be obtained for Hewlett-Packard's new 16-bit 68000-based machine. Context MBA's core function is a spreadsheet of 95 columns by 999 rows. The user can enter text, numbers and formulae in any cell. As any cell can hold up to 8,000 characters MBA can be used as a database and as a simple word processor. The package allows you to do sorting and searching operations and to construct several different kinds of graphs from cell data.

Context MBA is already available for the IBM PC, requiring the 256K RAM expanded system to run. The standard HP Series 200 model 16 comes with half a megabyte of RAM and uses the powerful 68000 processor, so it is well suited for this type of large,

Software dealer to join Softsel

Software dealer SBD Software is to gradually stop trading. Susan Ben-David, who owns the company, is closing it down and joining Softsel, the large American software distributor which has recently set up an operation in this country. Susan Ben-David's job as product services manager includes the task of selecting British and European software for distribution by Softsel worldwide.

More packages for BBC accounting

Six disc-based business packages for the BBC Computer have been announced by HCCS, covering nominal, purchase and sales ledgers, stock control, order processing and payroll. Each package costs £59.95 and can be used on its own or as a module integrated with the other packages in the range. Details from Home and Continental Computer Services Ltd, 22 Market Square, Biggleswade, Bedfordshire SG18 8AS. Telephone: (0767) 317300.

multi-function general package. The HP keyboard's unusual cursor-control knob can be used to scroll around inside Context MBA.

Context MBA for the HP system costs £593. A Model 16 system with twin Sony microdrives costs £5,213. Details from Personal Computer Literature Department, Hewlett-Packard Ltd, Customer Service Centre, Winnersh, Wokingham, Berkshire RG11 5DZ. Telephone: Crowthorne (0344) 773100.


NEW
LOW PRICE
£109.95
OR LESS
TEXAS INSTRUMENTS
HOME COMPUTER
NUMBERATION 2

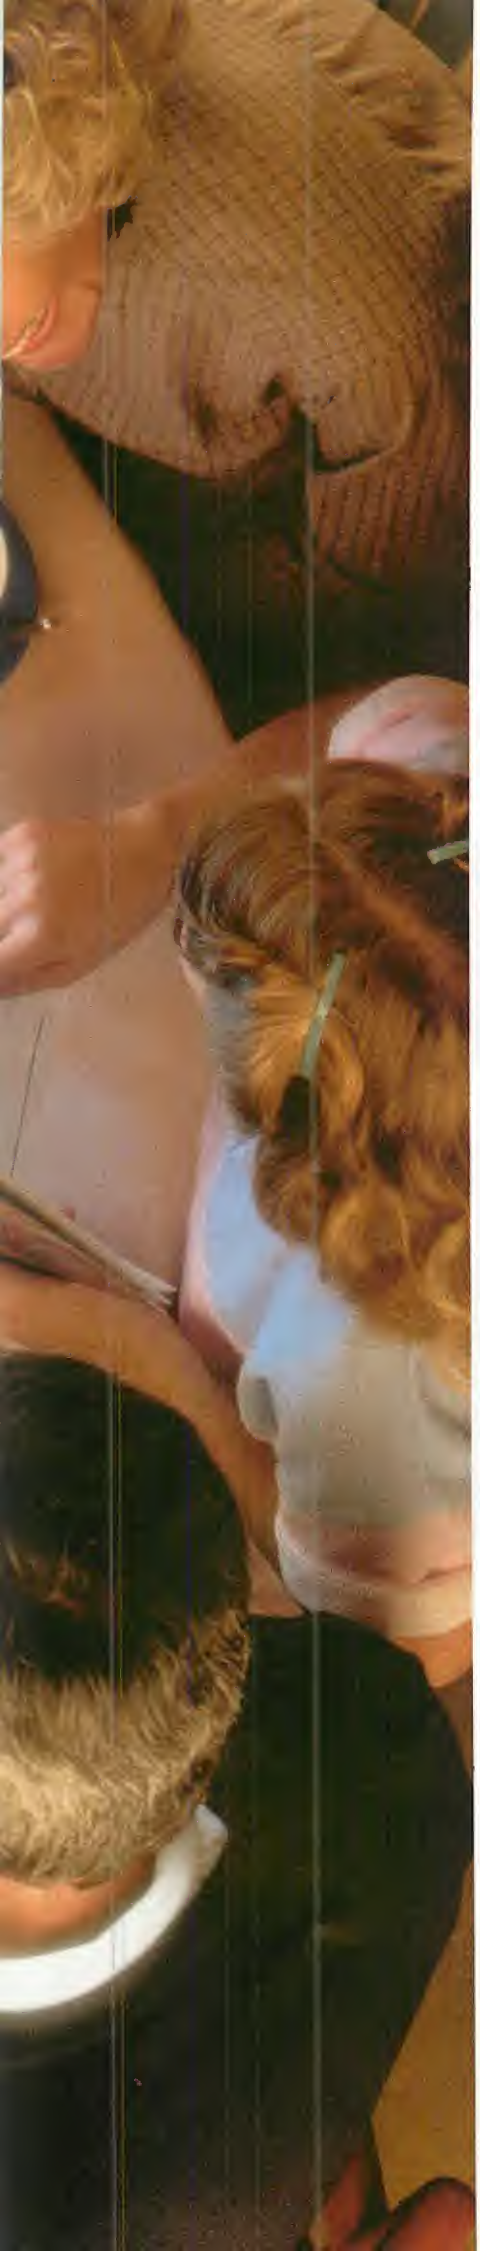

The unbeatable TI Home Computer. It's all the computers your family will ever need.

Buying a home computer is something you have to get right first time. It's too late when you've got one to find it won't take plug-in software. Or can't be programmed without an expensive accessory.

The TI Home Computer is a real computer system

The TI Home Computer has got the memory power you might expect from more expensive computers, built in. At its heart is a powerful TMS 9900 16-BIT Microprocessor. Most other home computers have only an 8-BIT. And you can expand the memory from 16K of RAM up to 52K.

The total memory capacity is 114K Bytes.

A wide range of software for everyone

Another feature that makes the TI system so powerful, yet so easy to use is Solid State Software.™ These plug-in cartridges cover everything from space games like Parsec™ to teaching maths, managing home finances and composing music. And the range is getting wider all the time.

It even has what professionals look for in a home computer

CPU: TMS 9900 16-BIT, plus 256-byte Scratchpad RAM.
Memory: Total 114K bytes; 26K bytes ROM internal; up to 36K ROM cartridges external; 16K built-in RAM expandable to 52K bytes.
Keyboard: 48 Key QWERTY, alpha lock, function key auto repeat.
Sound: 5 octaves, 3 simultaneous tones, noise tone.
Colour: 16 foreground and background. High resolution.
Interfaces: Cassette, TV, 2 joysticks, main peripheral port.

™ trademark of Texas Instruments.

More than one programming language

The standard programming language, TI BASIC, is built into your TI Home Computer so you can begin programming right away. But there's an expanded range of optional languages like Extended BASIC, TI Logo, USCD-Pascal, TI FORTH and Assembler.

With these you can fully expand your programming skills.

A wide range of peripherals

Most computers lose a lot of memory when you add peripherals. The TI Home Computer is different. Every peripheral comes with its own built-in programs to keep the loss of memory to a minimum.

The convenient Peripheral Expansion System houses up to eight peripherals. Additional hardware cards simply plug in. You can even add a complete Floppy Disk Memory System.

The peripherals include memory expansion, RS232 Interface, P-Code card and more. There's also a sophisticated matrix printer and Solid State Speech™ synthesizer – which you can use with your own TI BASIC programs.

A lot more for no more

The TI Home Computer gives you so much more without costing more. At today's price it's exceptional value. Take your family round to try one. If you never try it you'll never know what you're missing.

TEXAS INSTRUMENTS

Creating useful products and services for you.

● Circle No. 116

Quantumise your options!

Quantum 2000 NETWORK

- ★ The Network will support over 30 terminals
- ★ 11.8 Megabytes Hard Disk Storage
- ★ Global drive with common read only files
- ★ Password protected, read/write files
- ★ Common read/write files with file locking
- ★ Message facility
- ★ Shared or local printer
- ★ Terminals can support local floppies
- ★ Fully intelligent terminals with dual processors & 64K System RAM

Limited number of Dealerships available in the U.K.

QUANTUM COMPUTER SYSTEMS LIMITED. THE LEEDS COMPUTER CENTRE
55, WADE LANE, MERRION CENTRE, LEEDS LS2 8NJ
Telephone (0532) 458877

A MULTIBOARD COMPUTER

● Circle No. 117

Symbolic logic

Boris Allan continues his analysis of Gödel's work in relation to threaded interpretive languages.

"At last in its proper setting, the infinite has assumed a respectable place next to the finite, just as real and just as dependable, even though wholly different in character. Whatever the infinite may be, it is no longer a purple cow."

Edward Kasner and James Newman
Mathematics and the Imagination, 1940

IN GÖDEL'S arithmetisation of mathematics, the key concept is that of the Gödel number. Hilbert, in 1904, had noted that symbolic logic could be treated as though it were a branch of elementary number. But it was Gödel, in 1931, who worked what this actually implied in practice. The method was directed towards Russell and Whitehead's *Principia Mathematica*, and an English translation of his original German title might be "on formally undecidable sentences of principia mathematica and related systems."

Gödel starts with a set of basic axioms of number theory which effectively correspond to three of Peano's axioms of number:

- the successor of any number cannot be zero;
- if the successors of two numbers are equal, then the two numbers are also equal;
- and if a certain property is true for the number zero, and if true for any number it is true for its successor, then the property is true for all numbers. The latter is the axiom of mathematical induction.

In Gödel's logical symbolism, the number zero is shown as 0, the number one is shown by f0, the successor of 0, two is shown by ff0, and so on. There is only one primitive number in his system and that is 0, all other numbers are the results of operations on that number using the primitive f. Other primitives are simple variables, for example, X in his first axiom

$$\sim(fX = 0)$$

it is not true that the successor of any number is zero. These primitives are used to create secondaries, more complex arrangements which on analysis end up being assertions about numbers or variables.

At a different level there are secondaries which involve propositional expressions, or expressions which can be turned into such, and assertions about the relationship between the elements implicated. For example, in his second axiom

$$fX = fY \rightarrow X = Y$$

if the successor of X is equal to the successor of Y, then X is equal to Y. Either side of the implication is ultimately composed of primitives but the implication is of a different order of things.

In the 1931 article Gödel starts his arithmetisation by associating each of the primitive signs in his symbolism with a natural number.

Symbolism and natural numbers.		
	0	1
	f	3
	~	5
	v	7
	P	11
	(	13
	)	17
	X	19
	Y	23

and so forth — any scheme of assignment which uses the prime numbers would obviously do. The Gödel numbers for these primitives correspond to the addresses of the locations for primitives in threaded interpretive languages. If you show a property of X, that is a higher order type, by X2 then this is given the Gödel number 19^{2}. A property of a property of X is X3, with a Gödel number 19^{3}, and so on until infinity.

A secondary in a TIL or threaded interpretive language also has an address, that is, a number, and that number when used points to an unambiguous set of further addresses, which are either the addresses of primitives or further secondaries. The Gödel numbers of primitives are associated in a special way to enable the content of any formula to be established from the Gödel number of the formula.

The third of Gödel's axioms is

$$X2(0).X\ P(X2(X)) \rightarrow X2(fX)) \rightarrow X\ P(X2(X))$$

that is, if there exists a property of X which is true for 0, and if, for all X, when true for X it is true for the successor of X, then the property is true for all X. Note that mathematical induction cannot be expressed in a single axiom without use of a variable of a higher type that is X2.

The implication $\rightarrow$ is not one of Gödel's set of primitive symbols, but as A $\rightarrow$ B is the same as $\sim$ A v B, part of the above can be re-written

$$X\ P(\sim X2(X) \vee X2(fX))$$

which has the Gödel number

$$2^{19} * 3^{11} * 5^{13} * 7^{5} * 11^{19^{2}} * \ldots * 47^{17}$$

This number, though large, can be unambiguously factorised into its constituent elements so that you can always reproduce the formula. If the numbers of formulae in a proof, a proof is no more than a sequence of logical formulae, are F1, F2, F3, ... Fn, then the Gödel number for the proof is

$$2^{F1} * 3^{F2} * 4^{F3} * 5^{F4} * \ldots$$

and this method associates one and only one number with each formula or sequence of formulae. Thjis is the arithmetisation of mathematics — a bootstrapping exercise.

The threading through addresses which characterises TILs has a very close analogue here. You have a Gödel number which is factorised at the first level; you have a TIL word which produces a series of addresses; some or all of the numbers which arise from the factorisation have then to be factorised to produce further numbers; some of the addresses lead to sets of further addresses. The process continues, on both accounts, until you reach the system primitives.

The transfinite numbers are shown by the Hebrew for A, aleph, but to save typographical contortions I will simply use A — though still calling it aleph. A few characteristics of the first transfinite number aleph-null, A(0):

$$A(0) = A(0) + 1$$
$$A(0) = A(0) + A(0)$$
$$A(0) = A(0) * A(0)$$

though

$$A(1) = A(0)^{A(0)}$$

where A(1) is the next transfinite number, aleph-one. If these strange equalities are studied, it is obvious that they contradict Peano's axioms, for one property of zero is that it is different from its successor. So is it always possible to unambiguously factorise a Gödel number, is there some point at which the number is "too large"?

Return to the TIL. There comes a point at which the physical confines of the computer memory mean that we cannot extend the words in the memory any further. A TIL is manageable, it respects finity and it also asks for the mechanism by which an operation is to be performed. A word may, for example, refer to itself — a TIL asks what that self-reference means in practice.

Any secondary in Gödel's scheme will

(continued on page 38)

Why all other spread

In the early days of micros, the first spreadsheets appeared, using complicated cell co-ordinate references to define plans.

This made the most of limited computing power but plans were tricky to write, and difficult to read later.

Today's micros are much more sophisticated but all the spreadsheets are more or less the same as they always were. All that is, except PlannerCalc and MasterPlanner. Described in a recent university report as "... the best spreadsheet package currently on the Market," PlannerCalc and MasterPlanner are true business aids.

Dyed in the wool calc freaks won't like them but businessmen will.

NEW USERS START HERE

PlannerCalc at £85.00* is now accepted as the first choice for people new to financial planning.

Designed for 8-bit micros, it boasts the kind of features that you'd expect to pay twice as much for. (Buy PlannerCalc's nearest rival and you'll have to.)

Unlike all other 'calc' products it allows you to enter calculations in a language you understand. Plain English.

For example:

LINE 1 SALES=100, 150, 175, 210
LINE 2 EXPENSES=GROW 70 BY 15% FOR 4
LINE 3 NET=SALES−EXPENSES
LINE 4 CSALES=CUM SALES
COLUMN 5 YEAR=SUM OF COL 1 THRU COL 4

So it's much easier to use.

It uses the popular "spreadsheet" approach with a window that can be rolled in all directions.

Which means you can enter new figures and rules and immediately see their effect on everything else in the model.

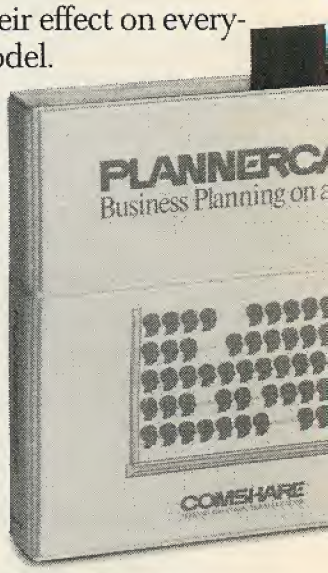

It comes with the best manual on the market and it's suitable for most micros with a ™CP/M 2.2 operating system, 64K of memory, giving at least 900 cells, minimum screen width of 80 characters and 2 floppy disc drives.

MUCH MORE POWER, NOT MUCH MORE MONEY

MasterPlanner is the most powerful spreadsheet system currently available wit its increased matrix size, 2000-3000 cells o most 64K micros. (But at £245* it certainl isn't the most expensive.)

Consolidation of models, allows you t create separate plans for each department an then combine them into an overall compan

COMSHARE DEALERS

Aberdeen
Abtext Ltd
(0224) 647074

Aldershot
EMS (UK) Ltd
(0252) 323951

Altrincham
Associated Computer Services
(061) 941 4725

Aylesbury
Helistaar Systems Ltd
(0296) 630358

Barnsley
Brook Office Supplies Ltd
(0726) 88616

Bedford
MSE Midland Ltd
(0234) 50265

Benfleet
Conquest Computer Sales Ltd
(0268) 59861

Birmingham
Compulaccount
(021) 236 3455

Blackburn
BEC Systems Services Ltd
(0254) 677215

105 Bus Systems Ltd
(0294) 676405

Bradford
Compsight
(0274) 668890

Raven Computers Ltd
(0274) 306966

Bristol
Avon Microcentre Systems Ltd
(0272) 277774

C.C.E. (Europe Ltd)
(0454) 321068

Merriton Computer Systems Ltd
(0272) 730079

Transtec Ltd
(0272) 277462

Bury St. Edmunds
S.T.R.E.S. Ltd
(0284) 62027

CPS (Data Systems) Ltd
(0233) 707 3866

Cambeley
Alexander Systems Ltd
(0276) 28973

Cambridge
Business Computers (Cambridge) Ltd
(0223) 357180

Canterbury
Kent Micro Systems
(0227) 50701

Aytex Ltd
(0227) 830083

Cardiff
Bowstrings Computer Services Ltd
(0222) 35825

Chatham
Medway Computers Ltd
(0634) 826090

Chesterfield
Nestar Computer Systems
(0746) 270564

Clevedon
Bard Computer Systems Ltd
(0272) 878 157

Doncaster
Bransler Computer Centre
(0302) 67135

Dublin
Transtec Ltd
(0001) 718629

Fareham
Electroneque Ltd
(0329) 230670

Gosport
Vaultberry Ltd
(0329) 233045

Grantham
The Soft Option
(0476) 850171

Harpenden
Inraden Ltd
(0582) 62472

Hastings
BMS Computer Services Ltd
(0424) 439190

Hereford
Honeywell Computers Ltd
(0432) 279404

Hitchin
McVeigh Business Systems Ltd
(0462) 50586

Huddersfield
Micrologica Systems
(0484) 47450

Ipswich
Anglia Microsystems
(0473) 740046

Leamington Spa
Words Ltd
(0926) 30209

Leicester
Leicester Micro Centre
(0533) 550683

Lisburn
MKM Electronic Ltd
(0846) 2184/3685

Liverpool
BEC (Liverpool) Ltd
(051) 263 5?x

London
BD Computer Systems
01-435 8442

Business Information Systems
01-373 3113

DaSpower Ltd
01-437 5994

Demo Computer Systems Ltd
01-670 4202

Corporate Modelling Consults
01 629 4007

Damledale Ltd
01-565 7004

DW Computer Systems Ltd
01-439 4354

Equinox Computers Ltd
01-739 2367

Ferrari Software Ltd
01 751 5791

Interlex
01-943 0968

Jarrogate Ltd
01-671 8321

Lighthouse Computing Ltd
01-679 4321

Marinas Electronics Ltd
01-373 5607

Maytar Business Systems Ltd
01 688 3836

MGE Systems Ltd
01 439 9617

Micronics Telesystems Ltd
01 263 6926

Nokia (UK) Ltd
01-940 6421

Pinewood Computers Ltd
01 504 0403

P.N. Hare & Associates
01 561 1988

Archives U.K. Ltd
01 223 3688

Software Ltd
01 387 9627

Stag Terminals Ltd
01-943 0777

Statacom Ltd
01 663 2266

Sumlock Boodain Ltd
01 250 0505

Sun Business Services Ltd
01 739 7949

Transam Computers Ltd
01 402 8137

Whispa Ltd
01 556 9151

Malvern
Malvern Micro Systems
(06845) 68900

Melksham
Oller Systems Ltd
(0225) 706381

ICEN Ltd
(0275) 702933

Midhurst
Wordskill Automation Ltd
(0730) 81 6641

Milton Keynes
Pericom Data Systems Ltd
(0908) 624242

Navan
S. Triple S Ltd
(046) 28412

Nottingham
Micropeople Ltd
(060745) 6917

Oxford
Choice Business Systems
(0491) 61 2697

Rayleigh
V.J. Parkins Associates
0268 743928

Redcar
Bibbs
Appleshop
(0642) 474707

Richmond
Tritech Computer Service
01-948 8751

Rutland
Microspecific Ltd
(0572) 2626

Slough
RGB Micros Ltd
1751 36581

Southampton
Xitan Systems Ltd
(0703) 38740

St Albans
St Albans Computer Services Ltd
(0727) 77700

St Helier
The Processor Centre
(0534) 77070

Thomas & Company Ltd
(0534) 77700

West Byfleet
Fergusson Computers Ltd
(93) 41810

West Drayton
Frasers Ltd
84 41231

Weston-Super-Mare
Eastern Ltd
(0934) 416346

Weybridge
Atwill Systems Ltd
0932 52586

Winchester
Modular Office Systems Ltd
(0962) 69759

Yatton
Glove Business Machines
0934 836212

Yeovil
Dale Computer Systems Ltd
(0935) 72000

sheets are out of date.

plan. Data transfer to word processing and other systems lets you incorporate figures in reports and output to a data base. It also has extensive formatting facilities which means you can produce reports that wouldn't look out of place in the board room.

It can store up to 25 standard reports to run when you need them. It's got full WHAT IF? analysis and direct editing of both spreadsheet and logic display.

JUST AS EASY TO USE

All this increased power doesn't mean you'll need a degree in advanced computing to understand MasterPlanner.

It works on exactly the same system as PlannerCalc and models written on PlannerCalc run without modification on MasterPlanner.



16 BIT VERSION

A new version of MasterPlanner has been specifically designed for the 16 bit micros like the Sirius 1 under ™CP/M-86 or the IBM personal using either CP/M-86 or ™MS DOS 1.1. With a vast matrix size of over 7000 cells on 128K and even more with larger memory, you'll at last be able to make the most of your micro.

ULTIMATE POWER

Fastplan is the top Comshare micro planning system.

It's file-based, allowing development of large scale models; with a staggering 18,000 cell matrix; full financial functions plus backwards iteration, file input and output; and much more. Yet, because it can be menu driven it is easy to use. For the full story, tick the Fastplan box when you return the coupon.

OVER 10 YEARS EXPERIENCE

When you invest in MasterPlanner or PlannerCalc you're not just getting the best software money can buy.

You're also getting the kind of back up and after-sales service that only a company of Comshare's track-record can guarantee.

If you'd like to know more about any product, call in at your local dealer or fill in the coupon and send it to us. *Plus VAT and post & package.

COMSHARE

Making the computer make sense.

*CP/M and ™CP/M-86 are the registered trade marks of Digital Research Inc.
Comshare Ltd., 32-34 Great Peter Street, London SW1P 2DB. Telephone: 01-222 5665.

To: Department 10 PC, Comshare Ltd., 32-34 Gt. Peter Street, London SW1P 2DB
Please send me:

Qty	Product	Micro	Op System	Disc Size	K	Amount £	p.
	PlannerCalc @ £99.50 (8 bit only)		CP/M 2.2	8"/5¼"			
	MasterPlanner @ £282.95		CP/M 2.2	8"/5¼"			
	MasterPlanner	IBM PC	MS DOS 1.1	8"/5¼"			
	MasterPlanner		CP/M-86	8"/5¼"			
All prices include VAT and postage & packing					TOTAL		

Please send me information about Fastplan ☐

I enclose a cheque/postal order for £_____ made payable to Comshare Ltd.
Please debit my Access Card No._____ for £_____
VISA Barclaycard No._____ for £_____
Signature_____
Name_____
Address_____
Tel. No._____
Please allow 28 days for delivery. VAT No. 238418649. Registered No. 980406.

Comshare reserve the right not to accept any orders. Any acceptance will be subject to Comshare's terms and conditions.

● Circle No. 118

Shopping for a Micro — BUY AN apple™

The Personal Solution

APPLE IIe

Apple IIe, Disk Drive with controller, 80 Col Card	£899
Apple IIe	£645
Monitor	£110
Colour Monitor	£299
Disk Drive Without	£200
80 col + 64K	£150
Applewriter	£119
Quickfile	£ 60
Multiplan	£175
Microsoft CP/M	£200

The Business Solution

APPLE III

Apple III 256K, Monitor III, SOS System Software with Apple II emulation built in disk drive	£1999
Apple III 256K Computer as above plus Profile 5mbyte hard disk	£2800
Applewriter III	£130
Visicalc III	£170
Quickfile III	£ 55

(All 3 packages for £295)

Complete range of invoicing, ledgers and stock packages available.

The Revolution

Lisa™

Attend one of our seminars and let us introduce you to Apple's™ revolutionary new personal computer for the office. Please telephone or write for details.

PRINTERS

EPSON	FX80	£375
	RX80	£265
	MX100	£399
OKI	82A	£299
	92	£439

THE SUPPORT PACKAGE

- **Training** – free half day course to take you from an appreciation of the Apple computers to an understanding of applications packages. Specialist courses are also available.
- Installation — on your premises for a small extra fee.
- Ongoing Support — handholding on both software and hardware.
- One full year's guarantee on all parts and labour.
- On site maintenance contract available.
- Comprehensive range of software, supplies, listing paper, diskettes.

ALL PRICES ARE EXCLUSIVE OF VAT

For computerised solutions to business problems contact

SIMMONS MAGEE COMPUTERS LTD

13 YORK STREET, TWICKENHAM, MIDDLESEX TW1 3JZ

01·891·4477

AT LAST, THE 132 COLUMN PRINTER FOR THE BUSINESS MICRO COMPUTER USER

The MT180 matrix printer is setting the standard in price/performance for the business micro user. The 160 cps gives you high throughput whilst its standard 132 column width is ideal for the latest accounting and spread sheet software.

With the MT180 you can easily use your word processing package. Just one code stream sets the printer to 40 cps correspondence quality and all codes associated with a daisy wheel printer.

And all these extra facilities are standard to the MT180

Bar charts and graphics print-out for business reports. Letter heads handled by friction and print-outs by tractor mechanism.

Problem free interfacing — buffered serial and industry standard parallel.

At Mannesmann Tally we just do not believe in the word option.

For the user we have the on-going support only a manufacturer can totally provide.

For the dealer we've set up an operation based entirely on your requirements.

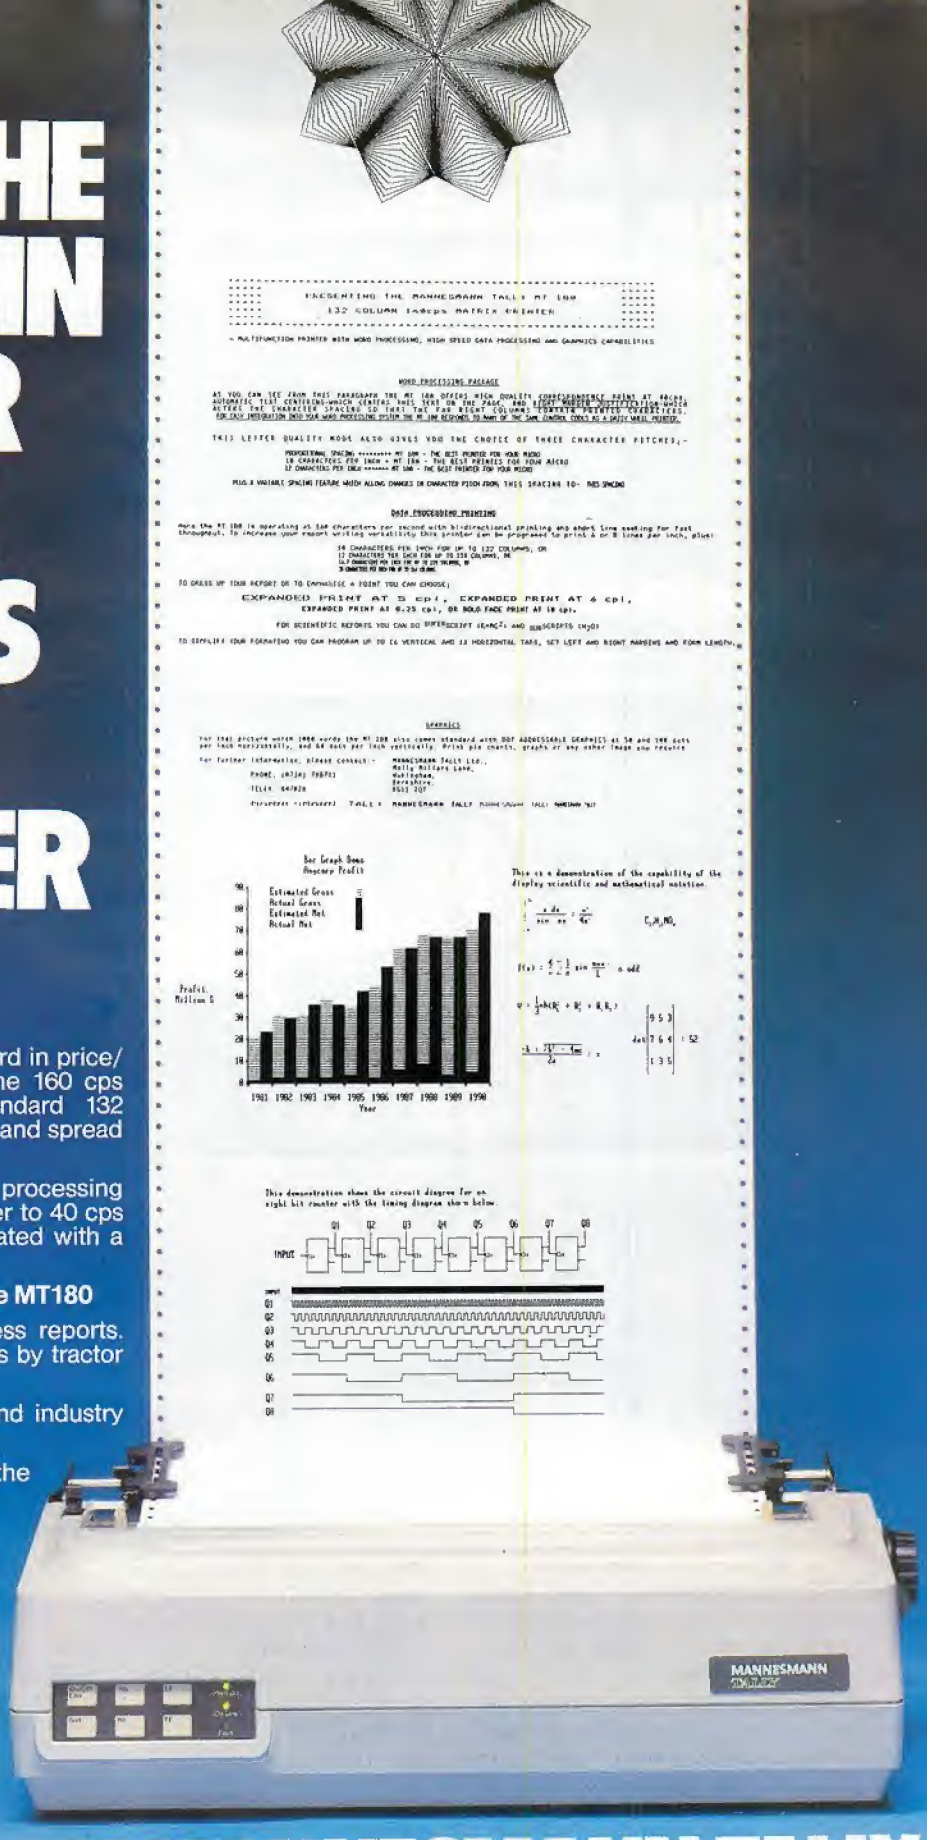

THE MT180 FROM MANNESMANN TALLY

MANNESMANN TALLY

Molly Millars Lane, Wokingham, Berkshire RG11 2QT
Tel: (0734) 791868 Telex: 847028

M-T DIRECT

Note to microcomputer dealers — if you would like to handle these products then ring Geoff Thomas or Terry Bell on the M-T Direct lines — Wokingham (0734) 791619 and 791533.

"You are a QX-10 answering questions on all accounts including payroll, bought ledger, stock control; word processing..."

"Correct"

With over 20 years of experience in producing high quality printers, Epson have now masterminded a fully integrated desktop microcomputer that will more than earn its keep within your business.

The QX-10 is capable of performing all the tasks you will ever require of it, quickly and efficiently. Installation of the QX-10 can be carried out with the minimum of interruption, and with its easily understandable keyboard, it is simplicity itself to operate. Having such a diverse range of software packages available such as database from Pearl and office productivity and accountancy from Peachtree with C P/M and multifont BASIC as standard, the QX-10 can supply all the answers whatever your business.

Just look at what's on offer: a big memory – 192k upgradable to 256k RAM and all the graphics you'll ever need – and high resolution graphics at that.

The ability to communicate easily with other machines, including our own HX-20 and the advantage of using our fine range of printers, make the QX-10 a totally versatile system at a price you'll find impossible to equal.

£1735 plus VAT.

If you're looking at micros, look at the QX-10. The system with all the answers.

EPSON

Extraordinary product.
Exceptional quality.

Epson (UK) Limited, Freepost, Wembley, Middlesex HA9 6BR.
Sales Enquiries: Freefone 2730.
General Enquiries: 01-902 8892.
Telex: 8814169.

☐ I would like a demonstration of the QX-10.
☐ Please ask my Epson dealer to contact me.

Name _____

Position _____

Company _____

Address _____

_____ Tel: _____

PC 10/10

● Circle No. 244

So cheap to keep in touch

by Ray Coles

THE COMPUTING power now available to the individual user via the new generation of 16-bit microprocessor-based personal computers is quite phenomenal. In many respects it exceeds the capabilities offered by those big expensive mainframe systems, which were once the mainstay of the computer industry. But despite their obvious power, most personal computers still lack one of the most useful features of the mainframes: easy communication with other users and the ability to share a common database.

However, judging by the latest batch of microprocessor peripheral devices this is a drawback which will soon disappear. Before long it will be the exception rather than the rule for personal computers to operate in splendid isolation in a dark corner of the office or living room.

Many multi-user systems particularly, need to communicate over long distances by the public telephone system. This need is currently satisfied by Modem — modulator/demodulator — units, which can be used to convert the serial RS-232 line of a terminal or VDU to the voice band signals expected by the telephone network. Trouble is these Modems are quite complex as they have to convert the logic-level signals from a terminal into audio frequency tones before transmission; they do the reverse at the receive end. They must also cope with the distortions inherent in long distance connections and the many other peculiarities of the telephone link, which may include landlines, microwave links and even a satellite between the transmit and receive terminals. Complexity equals expense and so this form of communication has in the past been largely ruled out for low-cost personal-computer applications.

But the semiconductor chip manufacturers have not been neglecting this problem. Now that the personal-computer revolution is well underway advances in chip technology and the attractions of a huge potential market have spurred the development of self contained Modem devices. These can be built into every micromputer at very low cost to provide a direct telephone connection to even the most humble office system.

The integration of a complete Modem system onto a single silicon chip is by no means a trivial matter. Traditional Modems are essentially analogue — rather than digital — systems, and rely heavily on the use of sine-wave oscillators and inductor filter circuits for correct operation. To satisfy the single-chip requirement an analogue signal is simulated using digital techniques, with the result that the new generation of Modems are really high-speed dedicated microprocessor systems, internally as complex as the 16-bit general purpose microprocessors they will support.

Several of the major chip manufacturers have recently announced sophisticated single-chip modems, which will ensure that competition is fierce and prices low; the one which caught my eye was the AM-7910 from Advanced Micro Devices.

AMD has brought the traditional advantages of VLSI digital circuitry to bear on the problem and has made its device totally programmable in order to suit the various standard communication protocols in use in the U.S. and Europe. Analogue-signal generation and processing is simulated by using a high-speed digital-signal processor, which has its own 24K ROM, 1.3K RAM array, digital-to-analogue and analogue-to-digital converters fabricated on the same chip.

The entire system lives in a tiny 28-pin dual-in-line package and runs from dual 5V supply rails using just 600mW of power. Voice band Frequency Shift Keying, FSK, data rates of 300, 600 and 1200 baud can be selected, as can one of the nine Bell and CCITT recommended communications protocols.

With this sort of capability now available for a few pounds, we can expect all future microcomputer systems to have long distance communication facilities available as a standard feature. This would allow even a basic office micro to keep in close touch with all that lovely data available in the outside world.

Modem links are good for long distance access to a central data base or larger computer, but due to the limited frequency response of the standard telephone network data rates are restricted, making the transfer of large quantities of data a tedious business. Over shorter distances data transfer rates can be increased dramatically by avoiding the restrictions of the telephone system; using instead dedicated high-speed communicaitons links called Local Area Networks, LANs.

Using a LAN, such as Ethernet, data transfer rates of 10 million bits per second are possible. This means all the microcomputers in, say, an office block can be linked together for the interchange of messages and the sharing of precious resources like hard-disc systems and line printers.

Unfortunately LAN controllers are complex and therefore expensive. But the semiconductor manufacturers are falling over themselves to provide cheap VLSI solutions, and a whole flood of new devices are about to be launched into an eager market.

Ethernet controllers are a good deal more complex than the simpler Modems, but their complexity is more easily handled using digital techniques. Again the new generation of single-chip controllers will depend heavily on the use of dedicated microprocessors to provide the clever bits.

Take the Intel 82586 LAN controller: when used with the companion 82501 driver chip, required to drive the coaxial cable used for interconnection, the device will implement the full Ethernet specification as defined by the original sponsors of the standard, the DEC, Xerox and Intel grouping. In the past about 80 integrated circuits have been required for the job, but with the advent of the 82586 a single 48-pin package is all that is needed.

The new Intel device takes the burden of link control away from the associated microprocessor. It merely requires it to assemble a message for transmission in its own memory space, or to retrieve received messages placed back in the microprocessor memory space by the controller. The 82586 has a built in DMA controller which allows it to take control of the system bus for the retrieval and replacement of messages, only interrupting the busy CPU when all the hard work has been completed.

Eventually we can expect LAN controller chips like the 82586 to cost less than £20 each, making the provision of this form of communication a logical option for future 16-bit machines.

BRITAIN'S No.1. OSBORNE DEALER!

IT'S HERE

THE NEW OSBORNE *EXECUTIVE*

Designed to appeal primarily to the corporate business user the Executive offers some exciting Osborne features.

- New 7" amber display screen
- Terminal Emulation – allows you to connect straight into the company computer system
- 6 Software programs inclusive in the purchase price
- *COMM-PAC™ option – giving you instant telephone connection
- Complete portability – vital to working flexibility
- Increased speed and capacity – 128K user memory. 200K bytes to each disk drive.

*Subject to British Telecom approval



The *New* Executive includes six Software programs to the value of £1200! Make an appointment now for a demonstration of the Executive's unique and positive benefits. **All inclusive price £1995 + VAT**

When you buy an Osborne at **01 Computers** you also benefit from the kind of back up you would expect from Britain's No. 1 Osborne Dealer.

- ✻ User training for you and your staff.
- ✻ Easily arranged credit terms.
- ✻ Sophisticated technical and service back up.

We would welcome a visit from you, to our showrooms where we can offer you coffee, an informal atmosphere and of course a personal demonstration of the incredible OSBORNE 1 and the superb New EXECUTIVE.

Call us for an appointment, sales/mail order, or simply drop in!

01-228 2207

✻ N.B. We are open until 6.30 pm weekdays and 10am – 1pm Sat.

01 COMPUTERS

Britain's No.1

Southampton House, 192-206 York Road, London SW11 3SA

TELEX: 8954575 CTCLDN

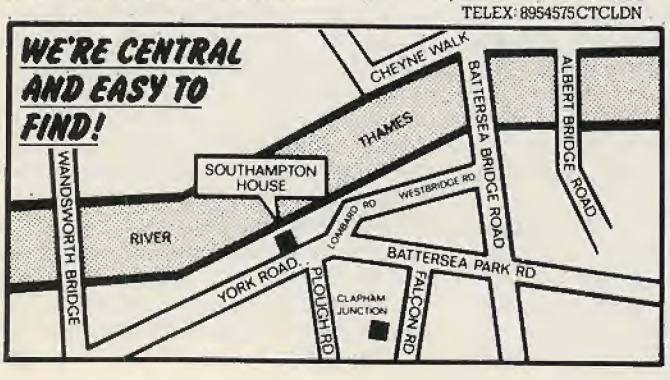

Please send me a copy of your introductory brochure and details of the Osborne Executive. PC2

Name _____

Address _____

_____ Tel No _____

Occupation _____

Southampton House, 192-206 York Road, London SW11 3SA

● Circle No. 135

ATA The market leaders!...

ACT Sirius 1

128K
1.2MB
S/S DISKS

ONLY- £1795

ATA'S philosophy is to ensure that our customers have quality computer hardware and software products at COMPETITIVE prices, together with technical assistance required to efficiently operate their computer system.

***Export specialists** — ring or telex for details*

...with recognised professional support

Sirius Hardware

	£
Sirius 1 128K 1.2mb disk drives	1795.00
Sirius 1 256K 2.4Mb disk drives	2395.00
Sirius 1 256K 1.2mb disk drive & 10Mb internal Winchester	3295.00
128K RAM Boards	264.00
256K RAM Boards	399.00
384 RAM Boards	499.00
512K RAM Boards	575.00

Z80 CP/M 80 System

SSE Z80 CP/M 80 system	395.00

Sirius Software

Languages

CBasic 86	179.00
Level 2 Cobol with forms 2	595.00
Microsoft Basic compiler	269.00
Microsoft Pascal compiler	335.00
Microsoft Fortran compiler	335.00

Word Processing

WordStar	269.00
SpellStar	120.00
MailMerge	120.00
Word Mailer	80.00

Databases

dBase II	365.00
Autocode	180.00
DataStar	135.00

Spreadsheet

Multiplan	180.00
CalcStar	80.00

PRICES EXCLUSIVE OF VAT AND CURRENT AT TIME OF PRINTING

System Utilities

	£
Diagnostic package	69.00
CP/M configuration package	119.00
MS DOS programmers toolkit	169.00
Sirius 1 hardware reference manual	45.00
IEEE 488 package	169.00
Graphics toolkit	169.00
Asynchronous communications remote batch	169.00
3270 emulator	285.00
	340.00

I.C.E. Winchester Sub-Systems

5 Megabyte	1395.00
10 Megabyte	1599.00
20 Megabyte	2099.00
40 Megabyte	3399.00

Tape Streamer

Will fit all drives as above and also Apple ProFile 5Mb (Please state which drive when ordering) £1660.00

Cartridges DC 300A (5Mb & 19Mb)	16.00
DC 600A (20Mb)	25.00

(Size after Formatting. One year's on-site maintenance.)
MULTIPLEXOR AVAILABLE FROM £699.00

Colour Monitors

Luxor high resolution 25Mhz linear & TTL	499.00
Kaga Denshi medium resolution TTL	325.00
Kaga Denshi low resolution	265.00

We also stock the Hantarex RGB monitors, as recommended by Apple in Europe.

Kaypro II

	£

Fresh from the U.S.A.! The best value portable micro from KAYPRO . . . including Software

KAYPRO II 2 × 200K disc drives	1695.00
KAYPRO IV 2 × 400K disc drives	£1950.00
KAYPRO X 1 × 400K disc drive and built in 10MB Winchester	

Other software including financial ledgers etc also available.

Hyperion

Hyperion 256 × 2 MSDOC, Basic	2950.00

Printers & Plotters

Epson

Epson RX80 120 CPS	260.00
Epson FX80 160 CPS	350.00
Epson MX100 100 CPS	420.00

Apple

APPLE Dot Matrix 120 CPS	349.00
APPLE Letter Quality Printer	1199.00

Ricoh

Ricoh 1300 Flowriter	1099.00
Richo RP1600 Flowriter	1499.00
Mannesmann Tally MT160L	550.00
Mannesman Tally MT180L	690.00

Plus full Range of Centronics Printers Available

Plotters

Hewlett Packard HP7470	1066.00
Hewlett Packard HP7475(A3)	TBA
Calcomp 8 PEN (A3)	2999.00

WE ALSO STOCK APPLE IBM AND HEWLETT PACKARD

TERMS AND CONDITIONS
For delivery please add £0-£199 + £5, £200-£1499 + £13, £1500 + 1½%.

CHEQUES WITH ORDERS
Please allow 10 days for clearance. PLC's, public sector etc 30 days credit available on official orders, subject to 5% credit charge.

ACCESS VISA

KAYPRO II PORTABLE
2 × 200 K DISK DRIVES
80 Col. 64K RAM
£1695

ATA — LONDON 4 Albion Hse, 1 Back Hill, London EC1. 01-833 0044
Telex 25102 CHACOM G

ATA — ST ALBANS 70 Park Street, St Albans. 0727 74361

ATA — SHEFFIELD 72 Eldon Street, Sheffield, S1 4GT. (0742) 700802
FREEPOST SHEFFIELD S1 1AY

ATA

● Circle No. 121

Symbolic Logic

(continued from page 29)

be shown as Sec? where the ? is replaced by an indentifier — compare my earlier analysis of secondaries for TILs. Each secondary, say a formula, will be given a Gödel number Number.Sec?, and to find what the number means, that is, to unravel the formula, you have to factorise that number. To factorise the Number.Sec? to find what is the formula you

```
NUMBER.SEC? EXECUTE
```

in direct analogy to a TIL.

Take a secondary SecX, and suppose this is composed of a series of other secondaries, taken in order, SecA, SecB, and SecC

```
: SECX SECA SECB SECC ;
```

or

```
: SECX NUMBER.SECA EXECUTE
  NUMBER.SECB EXECUTE
  NUMBER.SECC EXECUTE ;
```

where Number.SecX is the Gödel number of SecX, and likewise for the others. How is it possible to incorporate variables? A variable is effectively a dummy which can be replaced by any value; it is an Inputnumber, in terms of my earlier analysis of TILs. You will assume that Inputnumber.1 is the first variable, and it may appear more than once in a definition, and the same for Inputnumber.2, etc.

The operation ?Provable when applied to a number gives the result true if the sequence of formulae are a valid proof within the system, false otherwise. That is

```
NUMBER.SECX ?PROVABLE
```

and now you can produce Gödel's famous result.

Let SecY be the main secondary in which you are interested, let SecX comprise the main body of the sequence of formulae, and let there be a variable Inputnumber, which corresponds to X in the arithmetic

```
: SECY SECX INPUTNUMBER EXECUTE ;
```

As you saw in the first part, Inputnumber can be replaced by Number.SecY, and so SecY can be re-written as

```
: SECY SECX NUMBER.SECY EXECUTE ;
```

— one form of recursion.

Gödel designs a special formula, SecG, first he makes the simple formula

```
: SECG INPUTNUMBER
  ? PROVABLE NOT ;
```

which asserts that the formula whose number is to be supplied, via Inputnumber, cannot be proven. The number for this formula is Number.SecG, and what Gödel does is substitute for Inputnumber:

```
: SECG NUMBER.SECG
  ? PROVABLE NOT ;
```

and my earlier worries about the meaning of recursion, in part 1 in the September issue, are reinforced.

Consider how a TIL might analyse this formula/definition. It would not come to any conclusion, the process would never end until memory ran out. Gödel assumes, along with many other mathematicians, that in mathematics the story need never end, it could carry on until infinity. However, as noted earlier, this is not to say that at some non-Peano transfinity the solution would not be resolved. People can resolve it.

Computers are not generally used to play meaningless games, apart from in some reaches of AI and computer science — long may it continue. TILs were developed to provide a powerful method of using computers. Interestingly, it seems as if the TIL philosophy is a practical application of metamathematics, the arithmetisation of mathematics.

It is generally acknowledged that Gödel's method is the most powerful method yet devised for studying mathematics and logic, and this corresponds to the power of TILs. Gödel's method does have its problems, the unprovability formula, but these are only the problems inherent in the extension to the infinite of finite ideas.

A TIL is an artificial intelligence language which accepts that there is no infinity but has not — as far as I know — been accepted by the AI community which still believes in the infinite.

If your computer gets stuck in a dead-end job you clearly haven't got dBase II.

There you are with all that microchip potential and no software that's man enough to exploit it.

Too specialised, too basic, too difficult, too risky. Over the top in everything except flexibility! And that's a downright insult to intelligence – yours and the computer's.

For years now, the computer industry has been hooked on databases. And there's absolutely no doubt that an effectively run database is the only certain route to successful information management. The micro's got the horsepower, so why shouldn't you have the software to go with it?

No reason at all. That's why ASHTON TATE developed dBASE II.

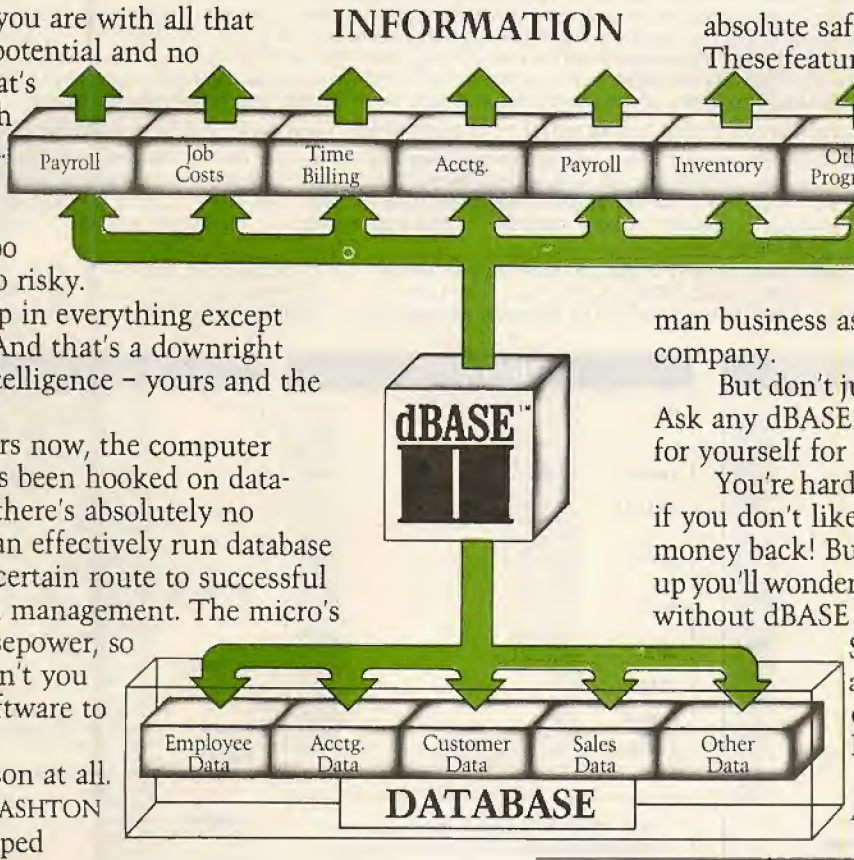

With dBASE II you can harness all your microcomputer's potential. It gives you a flexible structure on which to build business information and a straightforward means to develop complex and varied applications. In short, dBASE II gives you all you need to manage and use information.

When your business grows, you can change the way you handle information without changing the information itself. You can develop your own applications or buy them in ready-made. You can even build a set of menu-driven routines and let untrained people loose amongst your most valuable information in absolute safety.

These features and more have made dBASE II a standard for microcomputer information management. And it's a standard that's as good for the one-man business as it is for the larger company.

But don't just take our word for it. Ask any dBASE II dealer and try it out for yourself for 30 days.

You're hardly taking a risk, because if you don't like it, you'll get your money back! But before the 30 days is up you'll wonder how you ever managed without dBASE II.

So do your computer a favour. Give it a copy of dBASE II.

For the name of your nearest dealer contact ASHTON-TATE distributors:

ACT (Pulsar) 021-454 8585
Arbel Ltd. (0603) 39381
Encotel Systems 01-680 6040
Ferrari Software 01-751 5791
Midlectron (Belper) 6811
Pete & Pam (0706) 227011
Soft Option (0476) 860171
Software Ltd. 01-833 1173/6
Tamsys (Windsor) 56747
Tradesoft 01-627 1800
Xitan Systems (0703) 334711

Supported by: Ashton-Tate (UK) Limited, Cofferidge Close, Stony Stratford, MK11 1BY.

dBase II is one of the quality range of products which include The Financial Planner, Strategist and Friday, all registered trademarks of Ashton-Tate.

ASHTON·TATE

● Circle No. 125

G. W. COMPUTERS LTD LONDON'S WEST END NATIONWIDE OVERNITE SERVICE MORE PRODUCT RANGES BETTER SERVICE PROBABLY THE WIDEST SELECTION OF NETWORKS...
MICROS...AND PRINTERS ON DISPLAY NATIONWIDE

*****THE NEW DBMS III (series III of the world's first 'task-robot-programs')*****

*****FEATURES*****

- 1400 character record sizes
- mathematical scratchpad
- record relational indexes
- translateable to any language
- User-defineable reporting
- field protection/classification
- either-or. same as. greater. smaller
- sorts 'alpha or numeric' any window
- 12 online file architectures
- 32000 records per filename
- 20 main/200 sub fields per record
- field and record related formulae
- 'Jump-to' any of 32000 records per file
- random/binary/key/multiple field search
- 'if-then' questioning
- file protection/password entry
- range match. not match. integer match
- sort speed 500 records per 20 seconds
- 12 online file architectures
- 240 fields using cross-referencing
- cross-record calculations
- 'Jump-to' any record in 12 files
- User-defineable files/field words/sizes
- endless 'either-or' matching
- formulate/recall on selection criteria
- 13 interrogation question types
- short filing output/audit trails
- Word-star & Mbasic compatible

DBMS III.7 NEW SWITCH MODE FACILITY ENABLES YOU TO CROSS UP TO 12 DIFFERENT FILES (32000 RECORDS PER FILE) PRE-SELECTING ANY OF UP TO 20 FIELDS PER RECORD/FILE FOR DISPLAY/PRINT OUTPUT (240 FIELDS) IN ALL. ONE MASSIVE ENQUIRY CAN PASS THROUGH 384,000 RECORDS

You might have two files whose records are directly related to each other, so that the first file (say containing names and addresses) refers to the second file (say financial and other information relating to the same record numbers in the first file) directly. Then you can simply select that in file 1 you are interested in just the name and telephone numbers, whereas in file 2, you are interested in the income, trading period and number of branches, information. Your enquiry can then pass through both files highlighting that information only. Actually there doesn't need to be a strict correlation between the same record numbers in different files, and you can also on just one JUMP command go to any record in any of the 32000 records in any of the twelve files and carry on cross-referencing from there onwards.

DBMS'S MACROS WORK FROM THE MOMENT YOU INSERT THE 'TASK DISK' IN THE COMPUTER

Simply design your file, give its fields your words, setup your report mask, and then enter your records. Switch to 'automatic drive' and formulated any task you wish to program to fulfill, the task is stored as a macro. Take a copy of the program on another 'task disk' and from then on, the task disk will function without a single key-stroke. Think of a number of such 'task disks' such as "stock-re-order reports"; "stock-valuation reports"; "analysis"; "patient history analysis"; "research-analysis"; "budgetting-analysis"; "vehicle-location control"; "librarian analysis"; "plus more?"

Not only does this program surpass most of its kind that you might buy elsewhere, but if you buy the hardware from us, then you get it FREE . . . DBMS II (WITHOUT MACROS) AND DBMS III ARE FULLY IMPLEMENTED UNDER CPM-86 (tm) AND MS-DOS (tm) I.E.: SIRIUS/VICTOR/IBM DBMS II IS £395.00 (or £250.00 by mail order ex. training) . . . DBMS III is £575.000 (or £295.00 by mail order ex. training).

MICRO-COMPUTERS

INTERTEC	-Superbrain 64K RAM/320K disks	1895.00
	-Superbrain 64K RAM/700K disks	2395.00
	-Compustar 64K RAM/320K disks	2195.00
	-Compustar 64K RAM/700K disks	2595.00
NORTHSTAR	-Advantage 64K RAM/700K disks	£2195.00
(exc DOS)	-Advantage 64K RAM/5.3M disks	£3095.00
TELEVIDEO	-802 64K RAM/700K disks	2395.00
	-802H 64K RAM/7.3M disks	3950.00
	-806 64K RAM/10M disks	5195.00
	-816 256K/750K disks	*£3350.00
ACT	-Sirius 1 256K/1.2M disks	*£2195.00
	-Sirius 2 256K/2.4M disks	*£2695.00
	-Sirius 3 256K/10MEG disks	*£3995.00
VICTOR	-9000 256K/1.2M disks	*£2195.00
IBM	-PC 64K RAM/640K disks	*£2795.00
	-PC1 330K/640K disks	*£3395.00
IBM	XT (TEN MEGABYTE)	£4480.00
IBM	XF (FIVE MEGABYTE)	£3500
Ten 4480		*3995.00
Five 64K 5 Meg disk		£3250
ALTOS	ACS800-2 64K RAM/1M disks	2195.00
	ACS800-10 208K/10.5Meg disks	5695.00
NEC	APC 128K RAM/2M disks	call.00
CORVUS	Concept 16 bit pc	call.00
SANYO	G80 64K RAM/320K disks	1195.00
ABC	26 64K RAM/2.2M disks	3250.00

All computer prices include mbasic as standard.
All prices marked * are 8/16 bit machines.

WE STOCK MOST OF THE BEST KNOWN SOFTWARE ALSO MOST OF THE BEST KNOWN BRANDS OF PRINTERS & PERIPHERALS FROM 300.00 TO 2700.00 (OKI/EPSON/DRE/NEC/QUME/ANADEX/RICOH)

SYSTEM DEAL (our speciality) SAVES YOU 1500.00+

Buy any computer, any printer and 150.00 value diskettes add £85.00 for cables and testing.
add 10% for return to base warranty for 1 year (optional)
add £110.00 for delivery & installation (optional)
Training optional extra £120.00
and get completely *****FREE*****

cpm handbook	50 basic exercises	2000 sheets paper
DBMS III.7	magic wand w/proc	magic calc
mbasic 80	diagnostics	msort/dsort
recover	autoload	instant basic
library boxs	disk/games	DT/AS/NS sorts

Total Value £1525.00
Based on 8 bit hardware, 16 bit software varies.
Here's a typical example of a complete system deal

1-Sirius 128k ram/1.2 megabyte disks	2395.00
2-Oki microline 80 printer	295.00
3-Cables & testing	85.00
4-Diskettes	150.00
5-price differential on magic/wand for word-star	100.00
software described above ***** FREE *****	3025.00

We specialise in 'STANDARD MICRO-PRINTER SYSTEMS' as well as 'NETWORK SYSTEMS BASED ON A SHARED HARD DISK'.
The range of computer products (mostly ex stock) includes the most popular brands of micro-computers, printers, modems, buffers, spoolers and software.

PRINTERS

OKI	-Microline 80	295.00
	-Microline 82A	395.00
	-Microline 83	695.00
	-Microline 84	895.00
EPSON	-MX80/FT-3	425.00
	-MX100/FT-3	575.00
ANADEX	-DP 9000	895.00
	-DP 9501	1045.00
	-DP 9501 (A)	1145.00
QUME	-9/45 R/O	1995.00
	-9/55 R/O	2195.00
	-9/35 R/O	1495.00
NEC	-3510 R/O	1495.00
	-7710 R/O	2195.00
	-5520 KSR	2250.00
DRE	-8820	1295.00
	-8830	1695.00
TEXAS	-810	995.00
	-825	995.00
DIABLO	-630	1995.00
RICOH	-RP1600	1095.00
OLYMPIA	-ESW 103 14 CPS	975.00

G.W. COMPUTERS LTD — Tel: 01-636 8210
POPULAR BRANDS OF EQUIPMENT WE SELL
MICROS: Sirius/Victor/I.B.M./DEC
Epson/North-star/Sanyo/Superbrain
Compustar/Altos/Apple-Lisa/Televideo
PRINTERS: Nec/Qume/Diablo/Oki/Epson
Olympia/Ricoh/Texas/Dre/Anadex
OTHERS: Corvus/Compustar
Hard disks networks and multiplexors
Spoolers/Modems/Buffers
most of the best known brands of software

PERIPHERALS & ACCESSORIES

CORVUS	-6 Meg hard disk	1950.00
	-11 Meg hard disk	2950.00
	-20 Meg hard disk	3950.00
	-Multiplexor 7 station	695.00
	-Mirror backup card	695.00
INTERTEC	-Compustar 10 Meg hard disk	2950.00
	-CDC 144 Meg hard disk	7950.00
N'STAR	-16 Bit u/grade	395.00
	-18 Meg hard disk	2995.00
RODIME	-6 Meg hard disk	1495.00
	-12 Meg hard disk	1950.00
GENIE	-5MG fixed/5MG removeable disk	3295.00
QUADRAM	-64K print spooler/copier	295.00
BIZCOMP	-RS232/Auto-modem 1200 baud	450.00
AST	-port expanders (4 tmnls to 1 prtr)	395.00
GIX	-port expander (switcher)	95.00

NOTE: Corvus drives with multiplexor may network sirius . . Superbrain . . Concept . . PET . . Victor . . IBM . .

SOFTWARE

G.W.L.	-BUS V8.00 (Accounts)	275.00
	-DBMS II (Database)	*£395.00
	-DBMS II (by mail order only)	*£250.00
	-DBMS III (database)	*£575.00
	-DBMS III (by mail order only)	*£295.00
	-FORMS/TEXT/CALC/-DBMS IV	*£575.00
	-Sales Ledger	*£95.00
	-Purchase Ledger	*£95.00
	-Nominal Ledger	*£95.00
	-Stock-Control	*£95.00
	-Address-Mailer	*£95.00
	-QASort/QNSort (500 Recs/14secs)	*£95.00
MICROSOFT	-Mbasic 80	*195.00
	-Fortran 80	295.00
	-Cobol 80	395.00
	-Basic Compiler	*225.00
	-MU lisp/mu star	125.00
MICROPRO	-Word-star	*£295.00
	-Mail-merge	*£95.00
	-Spelstar	125.00
	-W-star/M-merge/Sp-Star	425.00
BYROM	-BStam (communications)	100.00
	-BStms (tele-comms')	100.00
DIGITAL	-CBasic	75.00
	-Concurrent CPM/86	*375.00
	-CBasic86	*175.00
	-Pascal MT	225.00
LIFEBOAT	-T/Maker	155.00
M'FOCUS	-CIS Cobol	420.00
	-Forms II	100.00
SORCIM	-Super Calc	195.00
PEACHTREE	Magic Wand	190.00
	-Magic Calc	175.00
VARIOUS	-including tele-comms etc	call.00

Software formats on all micros in our hardware list.
All prices marked £ are available 8/16 bit formats.

SOFTWARE COMMENT!!!
INTEGRATED SOFTWARE IS PROPERLY REPRESENTED, when the degree of integration reflects the ability to refer to as many different files, as well as employ as many different functions, under as many different modes as possible in one program only. This principle not being observed, will confer upon your purchases the attribute of their being expensive as an aggregate even though individually they are cheap. "DBMS III.7" and "THE KEY" are comparably worthy of such a label.

TERMS & ETC

G. W. Computers Ltd (Grama (Winter) Ltd)
55 Bedford Court Mansions
Bedford Avenue London W.C.1. England.
Tel: 01-636 8210: 01-631 4818: tlx 892031 twc g
Boston office tlx 94-0890
24 hour answerphone-leave address for 'inlopacks'
We do not operate a reader's reply card service.
Terms: C.W.O. or C.O.D. Prices exclude V.A.T. but include all non-credit discounts available.
No dealers. The above lists are not exhaustive
Please call at our showroom only by prior appointment. Unless expressly agreed, all warranties are commercial 90 days return to base for parts and labour. Annual warranties and maintenance facilities available nationwide through closely related third parties.

TELEPHONES: 01-636 8210 01-631 4818 TLX: 892031 TWCG (BOSTON 94-0890)

AN IMPORTANT ANNOUNCEMENT FOR POTENTIAL SYSTEM BUYERS

Any serious buyer knows that although the HARDWARE and SOFTWARE are both inter-dependant, the choice of software is CRITICAL to the consequence of having useless piece of hardware nor not.
With this in mind our standard system deal gives you the software free with a system purchase. However, if you want more!

NOW we have a piece of software that is a challenge to the highest state of the art on micro-computers today. It's the first of its kind world-wide. It is called THE KEY, and it will unlock the power of your micro to the limits of your imagination. It is very expensive however, because it is the first to embody many features of other programs, in one single program that has over-lapping functions. It costs 995.00 Stg., and is available with a system purchase.

it features, the entire list of functions already covered by our program called DBMS III.7a to be seen elsewhere in our advertisement. PLUS. + + + + + + + +
Paint any form including upwards from 100 (depending upon size of ram in hardware) data fields on the screen. Screen width up to 250 columns. Page lengths 100 lines.

The form might be a letter where data fields on the screen. Screen width up to 250 columns. Page lengths 100 liens.

The form might be a letter where data fields are name-addresses. Search files and accept any fields on teh database into any fields on the letter. The form might be a spreadsheet, where searches call records (in columnated style) from the database and perform calculations, the difference here is that unlike other 'calc' programs giving you 254 lines per spreadsheet, THE KEY gives you 32000 lines if your database has that many records.

The standard attributes of any field, allow you to SEARCH OTHER FILES for fields to accept into any field on the current form, plus allowance to POST OTHER FILES any fields from the current form into any fields on that file. RELATE TO AS MANY OTHER FILES, as the number of data fields you have on the master form. Make data fields CALCULATE AGAINST FORMULAE, and other data fields. VALIDATE DATA INPUTS criticially character by character; numerically, alphabetically and date-wise.

NO MANUAL NEEDED, all help menues accessible by hitting 'esc' at any point in the three major modes of activity (create, data entry, data query).

You can set up dozens of individual files that eventually are inter-connected through one master form; like an invoice, order, personnel-file, stock control, mail-shot. The master form may at every juncture of a data field, go outside the current form to supplementary forms for data retrieval, or post-filing.
Come along the computing road with us. We're out in front so you'll get the best there is at the price. On IBM and SIRIUS.

The first robot-concurrent-forms-database-text-processor-spreadsheet-no-manual-all-in-one-program.

G. W. COMPUTERS LTD — Tel: 01-631 4818

Contains the highest state of the art software available today

FORMS/TEXT/CALC/DBMS IV ALL IN ONE PROGRAM — ''KEY'' — at £995

When you budget for a complete system of software you eventually end up with a host of packages like, Sales, Purchases, Nominal, Data, Text, Calc, Mailshot, Invoice, Order, Workflow, Personnel, and so on.
The list is endless and the outlay several thousands of pounds.

Features. Design a form as wide as a window of 250 characters, long as needed. Cursor movements are 'left, right, up, down, delete left delete right, tab right-left-up-down' Paint your form as you like directly on the screen.

Text..... Write a letter as you see it on the screen, edit it then simply enter ^P to print.

Calc..... Set into the form, your data fields, ''£££££'' and specific file-related activities, formulae and validation checks.
Enter values and see the spreadsheet calculate itself.

Database. Search files for data to be inserted to fields specified.
All the features of DBMS III, explained elsewhere in our ad.

Here's an example of an invoice you might design for your stationery .....
You could design your own spreadsheet, order form, statement, or any other kind of form that is required to fit your existing stationery.

INVOICE <0>£££££££££££	
To £<1>£££££££££££ £<2>£££££££££££££££ £<3>£££££££££££££££ £<4>£££££££££££ £<5>£££££££££	From: G.W. Ltd 55 Bedford Court Mans. Bedford Avenue London W.C.1. Tel: 01-636 8210
Date <6>£.£.£ Tax point <7>£.£.£	Agent <8>£££

Quantity	Description	Cost	Tax	Total
<9>£££	<10>£££££££££££££	<11>£.£	<12>£.£	<13>£.£
<14>£.£	<15>£££££££££££££	<16>£.£	<17>£.£	<18>£.£
and so on...				
Total...<19>£.£		Tax...<20>£.£		

<??> items <1> to <5> internal command to request name input, and then search an address file for details.
<??> items <6> to <7> request date input and validate.
<??> item <8> request agent number and validate range.
<??> <9> request quantity, validate range.
<??> <10> request description, search file, accept, and calculate fields <11>, <12>, <13>, if finished invoice then calculate fields <19> and <20>

Now comes the more valuable facility, you can provide the 'FORM' with file-related instructions, not only to request a 'console' input for a file search against names, and stock, but after the invoice is finished the fields you have selected may be passed to related files.

EG: Send fields <0>, <1>, <6>, <7>, <11>, <12>, <13>, <19>, <20> to a sales ledger.
Then send fields <9>, <10>, <11>, to product analysis file.
Then send fields <0>, <1>, <7>, <19>, <20> to V.A.T. file
Then send fields <10>, <11>, <12>, <13> to Nominal ledger.

Available at present only on SIRUS/IBM PC.

● Circle No. 126

Steps & Adders

Start here with SUPERBRAIN



3 You need to store greater quantities of data with faster access times so Winchester Disc Storage facility now required. If you started with a W6, move forward 4 places. Otherwise . . .

2 Each SUPERBRAIN comes with CP/M operating system, BASIC programming language, twin Z-80 microprocessors and an RS-232 communications port.

1 Choose your SUPERBRAIN. Twin floppy disc, hard disc (W6) or multi-user (COMPUSTAR) models available. If you don't need a W6 or multi-user straight away, don't worry – you can always upgrade later on.

4 Either upgrade your SUPERBRAIN by replacing one floppy drive giving a Winchester plus floppy configuration . . .

5 OR . . .

6 Add on a 5¼" Winchester in a separate box. Whichever way you do it, Icarus Winchesters give 5, 10 or 30 MB of disc storage – enough to accommodate up to 200 separate items of information about each of 300 individual customers/sales prospects or up to 60,000 stock control records.



7 Your company moves to another part of the country to take advantage of regional development grant. SUPERBRAIN servicing well supported by Icarus nationwide dealer network.

8 Data interchange facility required so external 8" floppy disc drive added giving ability to transfer data to and from a mainframe computer.

MULTI-USERS CAN START HERE

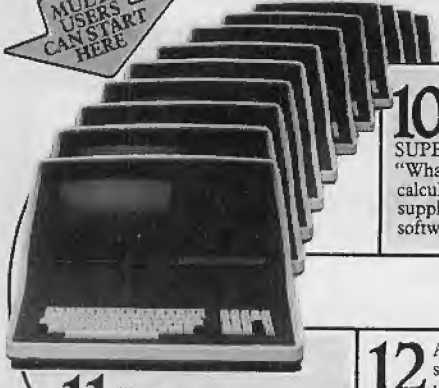

10 Your financial director decides to use SUPERBRAIN for "What if . . ." budgetary calculations. Icarus supplies specialised software.

9 Enhance performance of SUPERBRAIN by addition of GRAPHICS BOARD and supporting software.

You can now read and create your own IBM 8" format floppy discs.



11 Fit all your existing SUPERBRAINS with ICARUS multi-user chaining adaptor to take advantage of COMPUSTAR facility.

12 A COMPUSTAR system enables you to establish a multi-user network of SUPERBRAINS, with each SUPERBRAIN connected into a central data store giving 10, 96, or 144 MB of storage.

13 Leave nothing to chance. Add a 13 MB CARTRIDGE TAPE BACK-UP UNIT to give file-by-file back up for your SUPERBRAIN hard disc.

14 SUPERBRAIN: the game with no end. Our development continues as your business prospers . . .

You don't need to throw a 6 to start. To find out more about SUPERBRAIN microcomputers and add-ons from Icarus, circle the reader reply number below or phone for full details.

INTERTEC DATA SYSTEMS.

SUPERBRAIN

ICARUS

Computer Systems Ltd.

Deane House, 27 Greenwood Place, London NW5 1NN Tel: 01-485 5574. Telex: 264209

The Icarus SUPERBRAIN dealer network includes:

LONDON

CALIBRE BUSINESS SYSTEMS, 87 Long Lane, West Smithfield, LONDON EC1A 9ET. Tel: 01-606 1738.

J & F GROVER LTD, 10 Barley Mow Passage, LONDON W4 4PH. Tel: 01-994 6477

HOME COUNTIES

COMPUTING CONSULTANCY, Lyngen, Oldhill Wood, Studham, DUNSTABLE, Beds LU6 2NF. Tel: (0582) 872463

STRATEGY BUSINESS SERVICES, Station House, UCKFIELD, East Sussex. Tel: (0825) 4143

THAMES VALLEY COMPUTERS, 10 Maple Close, MAIDENHEAD, Berks. Tel: (0628) 23532

TRANSFLO INSTRUMENTS LTD, Loose Road, MAIDSTONE, Kent ME15 7BY. Tel: (0622) 683888

SOUTH & SOUTH WEST

MICRO-XZEC LTD, Walton House, Richmond Hill, BOURNEMOUTH, Dorset. Tel: (0202) 21220

EAST

CAMBRIDGE MICRO COMPUTERS, Cambridge Science Park, Milton Road, CAMBRIDGE. Tel: (0223) 314666

CULLOVILLE LTD, Thornfield, Woodhill Rd, Sandon, CHELMSFORD Essex. Tel: 0245 413919

MIDLANDS

BASIC BUSINESS SYSTEMS LTD, Network House, 20 Ludlow Hill Rd, WEST BRIDGEFORD, Nottingham. Tel: (0602) 232265

MICROAGE LTD, 53 Acton Rd, LONG EATON, Nottingham NG10 1FR. Tel: (0607) 664264

VIGO SOFTWARE SERVICES, Malt Shovel Cottage, Vigo, Burcot, BROMSGROVE, Worcs. Tel: 021-445 1445

WALES

BORDER COMPUTING & PROGRAMMING, Dog Kennel Lane, BUCKNELL, Salop. Tel: (05474) 368

MICROCARE COMPUTING LTD, 18 Baneswell Rd, NEWPORT, Gwent. Tel: (0633) 50482

NORTH

AP LTD, Maple House, Mortlake Crescent, CHESTER, CH3 5UR. Tel: (0244) 46024

JENNINGS COMPUTER SERVICES, 55/57 Fagley Road, BRADFORD, West Yorkshire. Tel: (0274) 637867

MICROSERVE (Humberside) LTD, 39 Oswald Road, SCUNTHORPE, South Humberside DN15 7PM. Tel: (0724) 489696

NASTAR COMPUTER SERVICES LTD, Ashton Lodge, Abercrombie St, CHESTERFIELD S41. Tel: (0246) 207048

SORTFIELD LTD, E Floor, Milburn House, Dean Street, NEWCASTLE-UPON-TYNE. Tel: (0632) 359593

XENON COMPUTER SYSTEMS, 18 Old Rectory Gardens, Cheadle, STOCKPORT, Cheshire. Tel: 061-428 9508

SCOTLAND

ESCO COMPUTING FACILITIES, 321 Blythwood Court, Anderston Cross, GLASGOW G21. Tel: 041-221 0310/2536

TURNKEY COMPUTER TECHNOLOGY LTD, 10 Somerset Place, GLASGOW. Tel: 041-332 7101

● **Circle No. 127**

ATA The market leaders!...

apple Package!

Consisting of Apple IIe Computer Disc Drive with Controller High Resolution 12" Monitor and Apple 80 col card

ONLY- £999

ATA'S philosophy is to ensure that our customers have quality computer hardware and software products at COMPETITIVE prices, together with technical assistance required to efficiently operate their computer system.

***Export specialists** — ring or telex for details*

...with recognised professional support

Apple Hardware

Apple IIe	£
Apple IIe 64K	645.00
Disk drive with controller	270.00
Disk drive	200.00
III Monitor including stand	120.00
Phoenix hi-res green 12" monitor	99.00
Phoenix hi-res amber 12" monitor	105.00

Apple III

Apple III 256K including Monitor III, Disk drive & SOS	1980.00
Additional 5.25" disk drive	270.00
Profile 5mb Winchester	1495.00

Accessories

80 column card	65.00
80 column card 64K extended	145.00
Numeric keypad (//e)	85.00
Numeric keypad (][+)	75.00
T.V. modulator with sound	12.00
Videx Videoterm 80 column card	195.00
Videx Soft Switch (40/80 column)	20.00
Videx Keyboard Enhancer	87.00
Videx Inverse ROM and character sets	18.00
Microsoft Softcard (Z80 CP/M)	199.00
Microsoft Softcard Apple III (Z80 CP/M)	265.00
Accelerator card (3.6 mHz 6502C & 64K)	289.00
Joystick (//e)	29.00
Joystick (][+)	22.00
System Saver fan & voltage reg.	59.00
Dust cover for Apple II	6.50
Dust cover for Apple II 2 × DD & 12" minitor	9.00
Dust cover for Apple III & Monitor III	11.99

Colour Monitors

Luxor high resolution 25Mhz linear & TTL	499.00
Kaga Denshi medium resolution TTL	325.00
Kaga Denshi low resolution	265.00

We also stock the Hantarex RGB monitors, as recommended by Apple in Europe.

PRICES EXCLUSIVE OF VAT AND CURRENT AT TIME OF PRINTING

Interfaces

	£
Apple RS232 Super Serial card	99.00
Apple IFEE 488 card	205.00
Apple parallel interface with cable	99.00
Apple III parallel interface with cable	130.00
CCS 7710-01 RS232 serial interface	109.00
Grappler + parallel graphics interface	105.00
PACT 8 bit A/D converter	115.00
Keyzone 12 bit A/D converter	138.00
PACT 12 channel D/A converter	125.00
RGB card TTL/analog output (programmable)	99.00
RGB card TTL output	85.00

Digitek Accessories & Interfaces

64K RAM	199.00
128K RAM	299.00
PrintMaster parallel printer interfaces available for Anadex, Epson, Centronics, Citoh, NEC & TEC	75.00
Super PrintMaster III interface available for all printers as above and also fer the Apple Dot Matrix printer	100.00
RS232 high speed serial interface	80.00
Z80 with manuals	149.00
Screenmaster 80 inc. soft switch inverse video, 3 scroll speeds & altern. chr. sets	185.00
Eurocolour card with modulator (][+)	95.00
UHF Modulator with 'clean signal'	39.00

Robocom Bit Stik C.A.D. Graphics System

Robocom Bit Stik 1.1 system	230.00
Robocom Bit Stik 1000 upgrade software	190.00
Robocom Bit Stik 1000 system package	415.00
Plotter driver for A4 and A3 plotters	90.00

Kappro II

	£
FRESH FROM THE U.S.A.! The best value Portable Micro from Kaypro . . . Including Software	
KAYPRO II 2 × 200K disc drives	1695.00
KAYPRO IV 2 × 400K disc drives	1950.00
KAYPRO X 1 × 400K disc drive and built in 20MB Winchester	
Other Software including financial ledgers etc also available.	

Hyperion

Hyperion 256 × 2 MSDOS, BASIC	£2950.00

Printers & Plotters

Epson

Epson RX80 120 CPS	260.00
Epson FX80 160CPS	350.00
Epson MX100 100CPS	420.00

Apple

Apple Dot Matrix 120 CPS	349.00
Apple Letter Quality Printer	1199.00

Ricoh

Ricoh 1300 Flow Writer	1099.00
Ricoh RP1600 Flow Writer	1499.00
Mannesmann Tally MT160L	550.00
Mannesmann Tally MT180L	690.00
Plus full range of Centronics Printers Available.	

Plotters

Hewlett Packard HP7470	1066.00
Hewlett Packard HP7475(A3) TBA	
Calcomp 8 PEN (A3)	2999.00

WE ALSO STOCK APPLE IBM AND HEWLETT PACKARD

TERMS AND CONDITIONS
For delivery please add £0-£199 + £5, £200-£1499 + £13, £1500 + 1½%.

CHEQUES WITH ORDERS
Please allow 10 days for clearance. PLC's, public sector etc 30 days credit available on official orders, subject to 5% credit charge.

Access VISA

Apple III 256K
WITH DISK DRIVE AND MONITOR III
£1980

ATA — LONDON 4 Albion Hse, 1 Back Hill, London EC1. 01-833 0044
Telex 25102 CHACOM G

ATA — ST ALBANS 70 Park Street, St Albans. 0727 74361

ATA — SHEFFIELD 72 Eldon Street, Sheffield, S1 4GT. (0742) 700802
FREEPOST SHEFFIELD S1 1AY

ATA

● Circle No. 132


Perfect Calc™
PERFECT WRITER™
Perfect Writer
Perfect Writer Perfect Speller
Perfect Writer/Speller
Perfect Filer
Perfect Filer
Perfect Filer
Perfect Calc

PERFECT SOFTWARE DOES EXIST . . .

Perfect Writer™
The revolutionary word processing program with split-screen editing. Features ninety-one (91) built-in page and document design formats. Multiple mailings management, automatic footnotes and index cross-referencing.

Perfect Speller™
The in-context spelling checker with a 50,000 word dictionary, including additional words unique to your subject.

Perfect Filer™
The versatile records management tool for mailing lists, labels, invoices, cheques, forms, and reports—fully integrated with Perfect Writer™. Easy to use, with two mailing list programs provided. So powerful you can perform up to five simultaneous sorts on up to 65,000 records.

Perfect Calc™
The most powerful spread-sheet program you can buy—up to seven worksheets on-line at once. User-generated functions, split screen, 17 built-in financial modeling programs. Fully integrated with Perfect Writer.™

Perfect Software, Inc.™

To order or find out more, contact:

Pete & Pam Computers
Telephone: 0706 227011
Telex: 635740 PETPAM G

Transam Microsystems Limited
Telephone: 01-405 5240/2113
Telex: 24224 (Ref. 1422)

Tamsys Limited
Telephone: Windsor 56747
Telex: 849462 TELFAC G

Software Limited
Telephone: 01 387 8832
388 9927

Telex: 21879

Interam Computer Systems Ltd.
Telephone: 01 622 9373
Telex: 925859

● Circle No. 133

THE OS

EXTRA

EXTRA SOFTWARE, EXTR

More good news as Osborne leads the way yet again with a sensational new software extra. Two leading programs – Personal Pearl and Peachtree Business Management System together worth over £600.00 come free when you buy either of the following systems.

THE OSBORNE 1 BUDGET OFFICE SYSTEM.

The Osborne 01 delivered with five outstanding software programs Ready-to-go –

Supercalc: Electronic spreadsheet
C Basic: Programming language
M Basic: Programming language
Wordstar: Word processing with Mailmerge
CP/M: Operating system

As well as giving you **Personal Pearl** an **Peachtree** Business Management systen Osborne include **STARTPAC** in the 01 Budget Office System. This self-instruction guide will enable you to get to work with your Osborne straight away!

Osborne offer you the 01 Budget Office System for only £1495.00. A saving of nearl **£600.00.**

BORNE

EXTRA

LIMITED OFFER

CAPACITY, EXTRA VALUE.

THE OSBORNE 1 EXTRA STORAGE SYSTEM.

The proven Osborne 01 and the Trantor 5MB hard disk offer the storage capacity of more than 30 times that of a floppy disk. And up to 5 times faster system performance. The Extra Storage System transforms the 01 Portable Business Computer into a powerful office system which matches the storage, speed, convenience and flexibility of desk top systems costing twice the price. **Personal Pearl** extends the power of your Osborne for information handling tasks previously reserved for larger systems.

Installation is easy – simply unpack your disk, plug it into your Osborne 1 and run a simple installation procedure.

The Osborne 01 with Trantor 5MB hard disk system together with **Personal Pearl** and **Peachtree** Business Management System costs only £2995.00. A saving of over **£800.00.**

£2995

Take the lead from Osborne and telephone the Osborne Sales Department now for details of your local authorised Osborne Dealer

Tel: (0908) 615274.

The Osborne Computer Corporation (UK) Ltd. 38 Tanners Drive, Blakelands North, Milton Keynes, MK14 5LL, Bucks. Telex: 825220.

OSBORNE

COMPUTER CORPORATION

Someone has to lead the way

● Circle No. 134

The SPRINT 11 PLUS with the Qume Connection

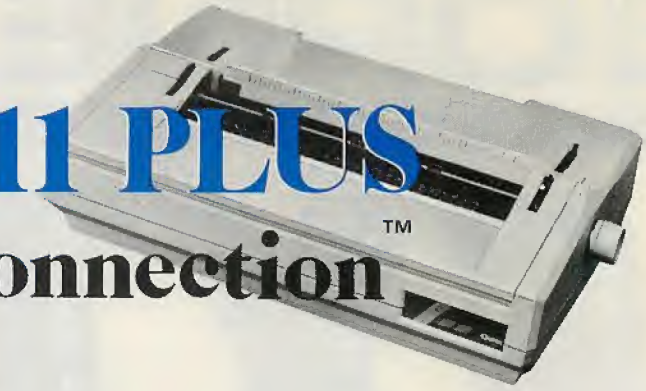

Qume's legendary print quality is now available for your small business or personal computer with our new SPRINT 11 PLUS daisywheel printer. The secret is The Qume Connection interface module. Our first Qume Connection modules fit the most popular computers, including those from IBM, Tandy, Commodore, Xerox, Hewlett Packard and Sirius through our range of R.S.232C, I.E.E.E. and Centronics interfaces.

Qume Connection modules for other microcomputers are on the way. You can get the SPRINT 11 PLUS that's right for your printing requirements, with a choice of 40 or 55 cps. So make the Qume Connection by calling us or one of the authorised Qume distributors listed.

AUTHORISED DISTRIBUTORS

Access Data Communications Ltd.,
Uxbridge, Middlesex. Tel: (0895) 59781

Alphatech Computer Systems Ltd.,
Bourne End, Buckinghamshire.
Tel: (06285) 28237

Bytech Ltd.,
Earley, Reading, Berks.
Tel: (0734) 61031

Daisy Terminals Ltd.,
Haywards Heath, West Sussex.
Tel: (0444) 457546
London Office – Tel: 01-434 2821

ISG Data Sales Ltd.,
Reading, Berks. Tel: (0734) 884666

Facit Data Products Ltd.,
Rochester, Kent. Tel: (0634) 401721

Qume®

Qume (UK) Limited,
Bridgewater Close, Reading,
Berkshire, RG3 1JT.
Tel: Reading (0734) 584646. Telex: 849706

A British Company of ITT

● Circle No. 120

Pete & Pam Computers

ATTENTION VISICALC USERS!

SEE US ON STAND 34

The 6th Personal Computer World Show

WITH VIDEX ULTRATERM VIDEO CARD AND ULTRATERM VISICALC PREBOOT DISK, YOU CAN SEE DISPLAYS THAT YOU'VE NEVER SEEN BEFORE.

24 lines x 80 cols, 48 lines x 8 cols, 32 lines x 128 cols, or 24 lines x 160 cols can be viewed on a LONG PERSISTENCE PHOSPHOR MONITOR.

VIDEX ULTRATERM £299 **ULTRATERM APPLEWRITER PRE-BOOT £21.27**

ULTRATERM VISICALC PRE-BOOT DISK £50.60

ViVi Videx

BASF QUALIMETRIC FLEXY DISKS

5¼" SINGLE SIDED/SINGLE DENSITY

11 BOXES FOR THE PRICE OF 10!!

BUILT FOR ETERNITY
WARRANTED A LIFETIME

11 boxes for £165

COPY II PLUS for APPLE & COPYII PC for the IBM PC

An extremely sophisticated bit (or nibble) copy program to allow you to make back-up copies of your protected software.

Also includes:
Catalog, with file lengths, hidden characters, deleted files, Verify Disk–bad sector scan of disk, Verify Files–scan of individual files. Verify identical files–compares files on different disks, lets you know at what point they first differ.
Verify drive speed: track/sector map, Sector Editor.

COPY II PLUS £39
COPY II PC £39

MICROSOFT MULTIPLAN ELECTRONIC WORKSHEET

U.K. VERSION
SPECIAL PRICE £149

The friendliest, most powerful electronic worksheet you can buy. Saves time in management and planning.

Accelerator II

MAKE YOUR APPLE RUN 3.58 TIMES FASTER FOR ONLY £299!!

Over 2000 UK Apple users now waste less time by using the Accelerator in an Apple.

See what Richard King, Hardware Editor of PCN has to say about the Accelerator. (PCN 15.6.83)

"Power down, open Apple, find empty slot, insert board, shut Apple, power up. That's it — well almost. There certainly can't be many add-ins to the Apple system that make such a difference in performance with so little fuss."

"The Accelerator II makes such a big difference to the operation of the Apple that I wish it did more."

"So what don't I like about the Accelerator II? Not a lot, to be honest. It's simple to install, it's reliable, it's easy to use and it runs like a bat out of hell."

"For the real business user who wants a real increase in throughput, I would strongly recommend the product."

NOW AVAILABLE FOR — stilts

EPSON MX100	£4.45
EPSON FX80	£3.95
EPSON MX80	£3.95

When ordering please state printers model

SUPER SUMMER CLEARANCE SALE
BUY NOW WHILST STOCKS LAST

Adventure 4+5+6	17.95	Mystery House	10.95
Adventure 7+8+9	17.95	Ulysses & The Golden Fleece	11.95
Adventure 10+11+12	17.95	Wizard & Princess	11.95
Poker	9.95	Marauder	11.95
Smarterm 80 column card	89.00	Cranston Manor	11.95
Supercalc for ALS Z-Card	39.00	Threshold	12.95
Eurocolor Card	49.00	Mouskattack	12.95
Parallel Interface Apple IIe	69.00	The General Manager	75.00
Universal Para Int Apple III	99.00	Frogger	14.95
Datstones of Ryn	9.95	Cannonball Blitz	12.95
Hellfire Warrior	19.95	Latipak	12.95
Star Warrior	19.95	Frogger IBM	19.95
David's Midnight Magic	14.95	Lunar Leeper	11.95
Red Alert	12.95	Crossfire IBM	12.95
Space Quarks	12.95	Multi-Disk Catalog III	10.95
Galactic Trader	10.95	Back It Up	24.95
Galactic Revolution	10.95	Phantoms Five	12.95
Dueling Digits	12.95	Gamma Goblins	12.95
Labyrinth	12.95	Sneakers	12.95
Raster Blaster	12.95	Autobahn	12.95
Lower Case Adapter (Rev 7)	15.00	Borg	12.95
County Fair	12.95	Space Eggs	12.95
Thief	11.95	Copts and Robbers	12.95
Swashbuckler	14.95	Epoch	14.95
Missing Ring	12.95	Hadron	14.95
Pig Pen	12.95	E–Z Draw	19.95
Space Strike for IBM	12.95	Twerps	13.95
Terrorist	12.95	Computer Football	13.95
Network	9.95	Jellyfish	13.95
Windfall	9.95	Fly Wars	13.95
Elite 80 Col Card for Apple IIe	55.00	Cyclod	13.95
Russki Duck	14.95	Bandits	13.95
Phazer Fire	12.95	Minotaur	13.95
Zenith	12.95	The Blade of Balckpoole	13.95
Neptune	12.95	Call to Arms for IBM	13.95
Lazer Silk	12.95	Escape from Rungistan	13.95
High Orbit	14.95	Free Fall	13.95
Data Master 3.3	39.00	Smith Corona TP1 D/W Parallel	349.00
Job Control/Costing in Pascal	49.00	Supercalc for IBM	149.00
Transit (Utility)	19.00	ACE (Applesoft Command Editor)	17.95
Zork II For IBM	18.95	Munch-a-Bug	22.95
Easyplanner for IBM	129.00	Routine Machine	29.95
Easywriter 40 column	49.00	AIO II Serial Parallel I/F	119.00
Easyfiler for IBM	199.00	ASIO Apple Serial Card	79.00
Juggler	14.95	Mill Assembler Dev Software	45.00
Transforth II	59.00	Cartels and Cutthroats	17.95
Grapple	12.95	Program Line Editor	18.95
Lower Case Apart W/Shift Mod	19.95	Oddessy	14.95
Alien Ambush	12.95	Global Program Line Editor	29.00
The Best of Muse	17.95	Kram	39.00
Firebug	10.95	Super Kram	69.00
Frazzle	10.95	Lower Case Chip	15.00
Pegasus	11.95	Lower Case Adapt for Pre Rev 7	17.00
Softporn Adventure	11.95	Wizard SOB . . 16K Buff Serial I/I	149.00
Cross Fire	11.95		
Jawbreaker	11.95		
Mission Asteroid	7.95		

Pete & Pam Computers

invisapple

Mail Order & Distribution:
New Hall Hey Road,
Rossendale, Lancs., BB4 6JG
Phones:
(0706) 212321 & 227011
Telex: 635740 Petpam G

Norwegian Agent:
The Norwegian Software House
Address Okernveien 145
Oslo 5
Telephone 47 2 64 55 77

London Retail:
103-5 Blegborough Road,
London, SW16 6DL
Phone: 01-677 7631
London Office Open Saturdays

Prices do not include VAT please add 15% to your remittance
Postage and Packing FREE

DISKPOST

* BETTER VALUE MAIL ORDER SUPPLIES FOR YOUR MICRO *

VEREX DISKS

Manufactured by Verbatim, to accepted industry standards. Full one year warranty. Quality products at popular prices for both home and office use.

5.25'' DISKETTES

MD200–01	S/S, S/D, 48TPI. soft sector only	£1.71
MD200–AS	S/S, S/D, 48 TPI Apple systems only	£1.66

8'' DISKETTES

FD34–1500	S/S, S/D	£1.85
DD34–1501	D/S, D/D	£2.82

32 hard sector available at same price.

DATALIFE DISKS

From Verbatim, the world's leading diskette manufacturer. Full 5 year warranty. All minidisks are certified for double density recording, and are fitted with hub ring reinforcement as standard.

5.25'' DISKETTES

MD525	S/S, D/D, 48 TPI	£1.92
MD550	D/S, D/D, 48 TPI	£2.86
MD577	S/S, D/D, 96 TPI	£2.69
MD557	D/S, D/D, 96 TPI	£3.60

48 TPI suitable for 35 or 40 track operation. 96 TPI suitable for 77 or 80 track operation. 10 and 16 hard sectored versions available at same prices.

8'' DISKETTES

FD34–9000	S/S, S/D	£2.75
FD34–8000	S/S, D/D	£2.80
DD34–4001	D/S, D/D	£3.26

32 hard sectored versions available at same prices.

XIDEX DISKS



The new premier quality standard, against which all other manufacturers will have to be judged. All products certified for double density recording. Now with a **lifetime** warranty. Unreservedly recommended.

5.25'' DISKETTES

5012–1000	S/S, D/D, 48 TPI	£2.06
5022–1000	D/S, D/D, 48 TPI	£2.90
5012–2000	S/S, D/D, 96 TPI	£2.92
5022–2000	D/S, D/D, 96 TPI	£3.77

48 TPI suitable for 35 or 40 track operation. 96 TPI suitable for 77 or 80 track operation. 10 and 16 hard sectored versions available at same prices.

8'' DISKETTES

8012–1000	S/S, D/D	£2.78
8022–1000	D/S, D/D	£3.36

32 hard sectored versions available at same prices.

THE LAST ONE

Got a computing problem? Produce your own solution by using The Last One, a program generator which has helped to solve hundreds of problems in installations throughout the world.

TLO runs on the Apple II and IIe, Commodore 4032 and 8032/96, TRS-80 Model II (TRSDOS or CP/M), most CP/M, CP/M86 and MS-DOS machines including the IBM PC (PC -DOS) and Sirius.

Try out TLO for £50.

A limited demonstration version of TLO is now available for only £50, including full documentation. This cost is fully refundable against your subsequent purchase of a full version.

Full version costs:—

for Apple II — £185
all other versions — £330

Please specify version requirements when ordering.

DISK DRIVE HEAD CLEANING KITS

Helps to protect your valuable data, and minimise expensive downtime and repair costs. Consists of a flexible jacket, which receives a pre-saturated cleaning disk. Each disk is sealed within a foil sachet to ensure that it contains the right quantity of cleaning fluid when used. After use the disk is disposed of, and the jacket is kept for future use.

Suitable for single or dual head drives. Please specify 8'' or 5.25'' disks.

STARTER KIT £8.12
(contains jacket and two cleaning disks)

REPLACEMENT CLEANING DISKS £15.54
(pack of 10)

DISKETTE STORAGE BOXES

Protect your diskettes and valuable data from external contamination. Lockable, portable and secure. Two part box made from anti-static ABS plastic. Price includes dividers and index labels. Capacity 80 disks.

A5 Storage box (for 8'' disks) £33.60
A6 Storage box (for 5.25'' disks) £23.10

CTI – CP80 PRINTER



Features:—

Friction and tractor feed as standard
80 c.p.s.
Bi-directional logic seeking.
13 x 9 dot matrix giving true descenders.
Sub and superscripts.
Italic printing and auto underlining.
Condensed, emphasised, expanded and double strike printing (can be mixed in a line).
Parallel interface fitted as standard.
12 month warranty.

Print sample available on request.

CP 80 PRINTER	£289.00
Optional RS-232 interface	£40.00
Special VIC20/VIC 64 interface	£46.00

PRINTER STAND

Suitable for use with dot matrix printers. Lifts printer sufficiently to enable continuous stationery to self-stack. Painted steel unit.
Dimensions: 39cm wide
x 28cm deep
x 10cm high

Comes as package which also contains:—

200 sheets continuous stationery.
1 x 9½'' binder.
1 x highlighter pen.
choice of rubber feet/sticky pads.

PRINTER STAND £21.95

COMPUTER FURNITURE

Suitable for use with all leading personal computers. Features a top shelf for monitor/printer, lower shelf for books, paper and general storage; large desk top surface at keyboard height; attractive teak finish, and castors for mobility.

U.K. Manufacture. Comes in flat pack for self assembly – full instructions provided.

A further range of more sophisticated units is available – please ask for details.

THE ORGANISER £55.00

To: DISKPOST, FREEPOST, WEST MOLESEY, SURREY, KT8 0QF. Tel: 01-941 4066

All prices inclusive of delivery and insurance on British mainland.

Qty	Product	Price
.....	.....	£.....
.....	.....	£.....
.....	.....	£.....
.....	.....	£.....
PC	Sub Total	£.....
	Delivery/Insurance	£ FREE
	V.A.T.	£.....
	TOTAL VALUE OF CHEQUE PAYABLE TO DISKPOST	£.....

Company Orders

If you are unable to raise cheques without an invoice, please post or telephone your order to us. We will then forward a pro-forma invoice, for your accounts department to pay against.

YOUR NAME.....

ADDRESS.....

.....

.....

Tel. No.:.....

Please charge to my Visa/Mastercharge/American Express/Diners Club account.

My card number is .....

VISA DINERS CLUB INTERNATIONAL AMERICAN EXPRESS

Credit Card Orders

We welcome Visa, (Barclaycard), Mastercharge, (Access), Diners Club and American Express. There is no credit card surcharge. Either write your card number on your order, or telephone your order to our sales office.

DISKPOST

DISKPOST® is the mail order division of the BFI Electronics Group Europe's largest independent diskette supplier.

FREEPOST West Molesey
Surrey KT8 0QF. Tel: 01-941-4066

● **Circle No. 140**

If you think seriously about Micros . . . . .

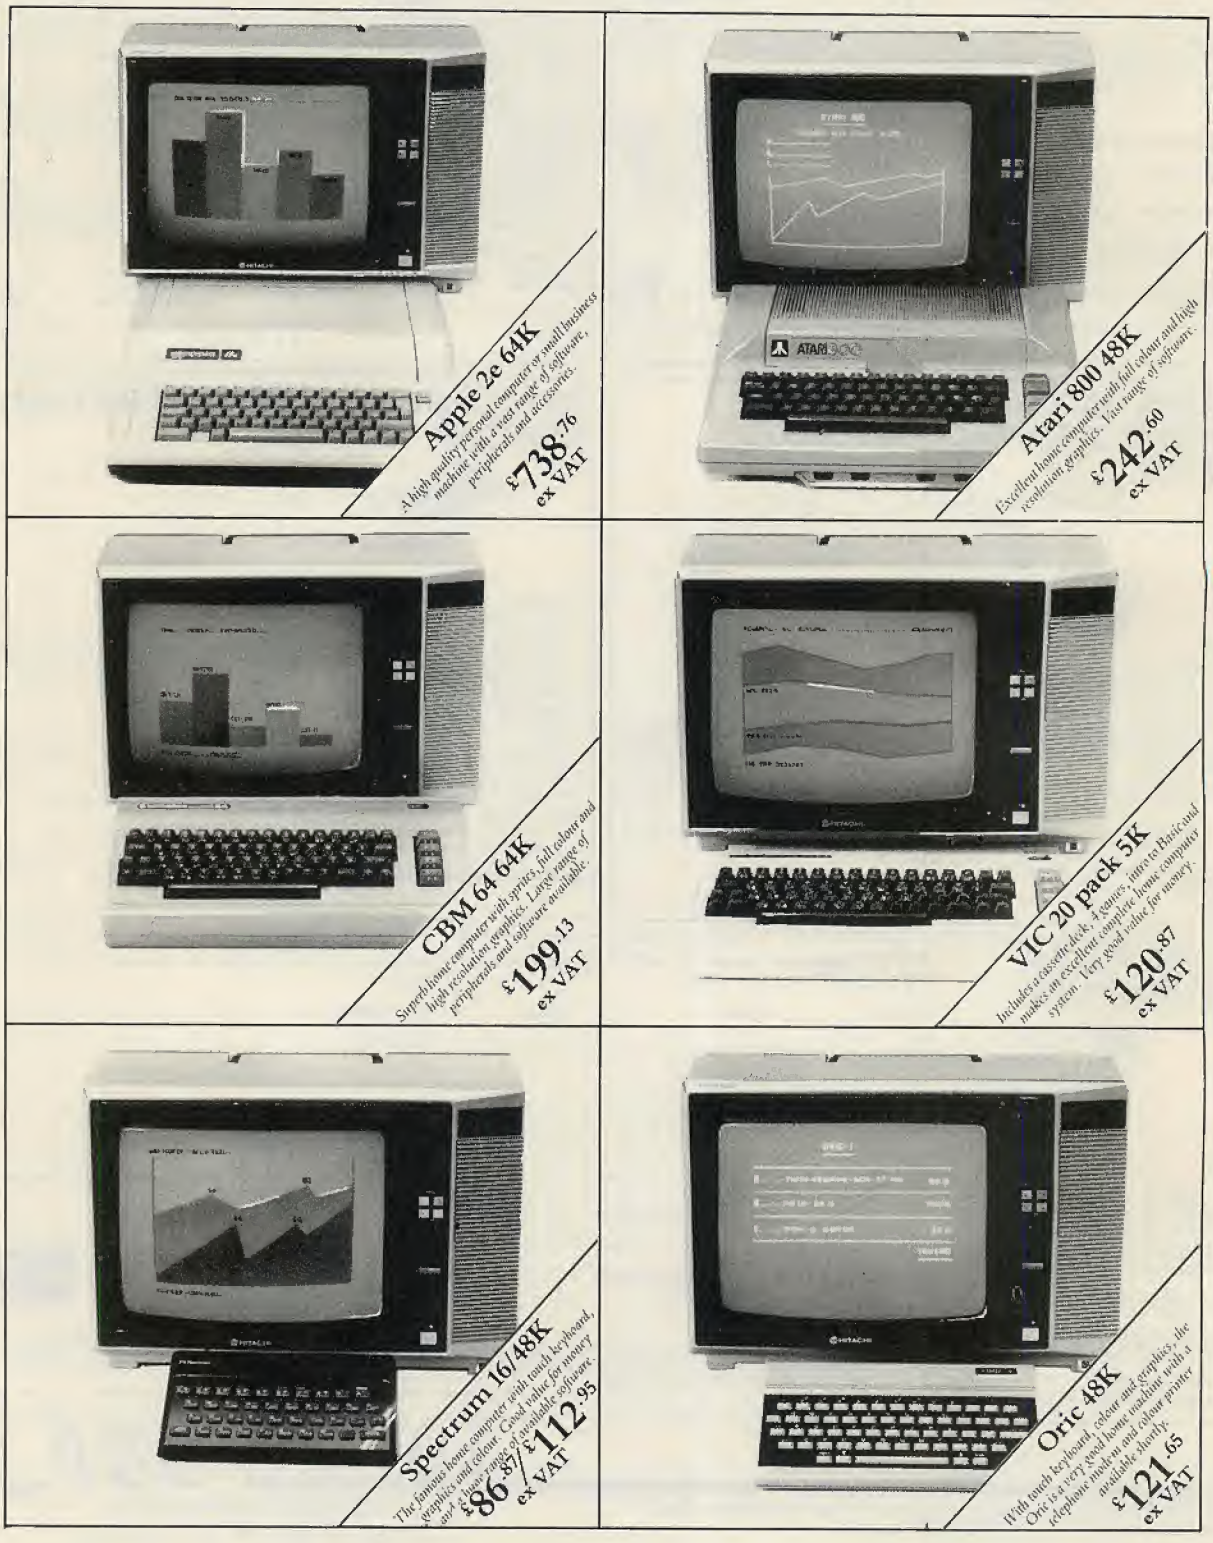

. . . think seriously who you buy from.

It's surprising where you can buy a micro these days. The chemist, the newsagent, department stores – it won't be long before your local greengrocer is selling Apples as well as apples!

But who do you really trust? Do you honestly believe that the 'Johnny come latelys' can offer you the expertise and in depth knowledge of a specialist?

Do you honestly believe that they have the influence and status in the market, to offer you a full choice of the latest technology and all at probably the best prices around.

In all branches of Laskys, you'll find Micropoint, our specialist micro computer department. And at Micropoint you'll find everything you're looking for. Computers, Peripherals, Software, Programs, expert advice, test play and comparison facilities. It's the complete micro service, plus Laskys free 2 year parts and labour guarantee.*

Unfortunately we can't guarantee that you'll find the same standards anywhere else.

INSTANT INTEREST FREE CREDIT*
Available on selected items. 10% deposit, followed by 9 equal monthly payments

Micropoint at Laskys

*All credit offers subject to acceptance. Laskys Credit Brokers. Please ask for written details. Prices correct at time of going to press, but may be subject to variation. All offers subject to availability. Prices include VAT. **Except portable equipment one year. Computer peripherals, plotters one year. Commercial use of computers, VDU and other Peripherals programs 6 months. Programs will only be exchanged if proven faulty and identical to the same program.

LONDON & HOME COUNTIES
42 Tottenham Court Road, W1
257 Tottenham Court Road, W1
7-9 Queensway, W2
471-473 Oxford Street, W1
382 Edgware Road, W2
152 Fleet Street, EC2
Golders Green Road, NW11
BROMLEY 22 Market Square
COLCHESTER 13 Trinity Square
CROYDON 77/81 North End
KINGSTON Eden Street
LUTON 192 Arndale Centre
READING Friar Street
RICHMOND Hill Street
ROMFORD South Street
SLOUGH Queensmere Centre
WATFORD Charter Place
SOUTHERN ENGLAND
BRIGHTON 151-2 Western Road
BRISTOL 16-20 Penn Street
CHATHAM 8 The Pentagon
GLOUCESTER 25 Eastgate Street
MAIDSTONE 79-81 Week Street
SOUTHEND 205-206 Churchill West
MIDLANDS AND NORTH
BIRMINGHAM 19-21 Corporation St.
CHESTER 7 The Forum
LEEDS 28-34 Albion Street
LEICESTER 45 Market Place South
LIVERPOOL 33 Dale Street
MANCHESTER Arndale Street
(Adj. WH Smith)
NEWCASTLE-UPON-TYNE
6 Northumberland St.
NORTHAMPTON 78 Abington Street
NOTTINGHAM 1-4 Smithy Row
OXFORD 16 Westgate
PETERBOROUGH Queensgate Centre
PRESTON Guildhall Arcade
SHEFFIELD 58 Leopold Street
WOLVERHAMPTON 2 Wulfrun Square
YORK 10a Coney Street
SCOTLAND
EDINBURGH 4 St. James' Centre
(Closed for refurbishment)
GLASGOW 66-70 Buchanan Street
WALES
CARDIFF 122 Queen Street

● Circle No. 141



High speed shredding

Computer printouts often contain the most sensitive information in any company, yet the sheer speed at which the output flows can be enough to make disposal a major problem. To cope with this the Rexel ambassador range offers specialist DP shredders from micro to mainframe user capacity. Up to 180 feet per minute of multi part sets can be destroyed. Why not get in touch, and I'll forward all the details.

426 on enquiry card

Cut company phone costs

Do your staff use the telephone efficiently? If you have a feeling that some of your company's hard earned cash is being unnecessarily donated to British Telecom you should be talking to Callog. The Callog service provides a detailed analysis of outgoing calls and encourages good telephone 'habits' by pinpointing departmental costs. Indeed, the Callog service can immediately show you savings on telephone expenditure — savings that will far outweigh the small annual cost of the service itself. I have all the details.

427 on enquiry card

PAGE PLUS Computers

COMPILED BY–

Ursula Hewitt

65 Shawley Way Epsom Downs
Surrey KT18 5PD 07373 52031



Electronic typewriters with the Xerox touch

With the 600 Series Rank Xerox have produced five electronic typewriters offering a host of features to make typing faster and easier with less effort and impeccable results. The memory eliminates repetitive typing; self correction ends lengthy manual correcting and the Xerox touch of quality and features such as automatic emboldening, centring and underlining give extra authority to all your typing. Text editing models are available too. Whatever your needs, there's one just right for you — contact me now.

432 on enquiry card

A fast and efficient mailing system

If your computer can produce invoices in a matter of minutes it seems crazy to then spend hours mailing them by hand. The Neopost System Five-2 from Roneo Alcatel is designed to fold, insert, seal and frank in a fraction of the time it takes manually. The 'system' can be controlled by a single operator saving many costly man-hours and its modular construction gives it the flexibility to match your needs exactly. If you're interested in saving time and money circle this number today for more details.

428 on enquiry card

The Xerox 820 II micro-computer

The Xerox 820 II is the micro-computer which can really benefit your business. And it comes with a unique piece of extra software — Rank Xerox expertise. Expertise which will not only show you how to ensure you get the best possible out of the Xerox 820 II for your business; but even provides a telephone help-line to advise on using their specially tailored software programmes. Plus Rank Xerox have the engineers and the resources to provide on-site servicing — something few other manufacturers offer. Contact me now for further information.

429 on enquiry card



More than a word processor

If you want a revolutionary word processor, look no further than the new Dictaphone 6000. It can handle words and numbers. It can edit, arrange, select, count, file, print and answer questions. But it's more than simply a word processor. It copes with a whole range of micro-computer facilities like data processing and can exchange information with other terminals and computers, even mainframes. And for less than the cost of a secretary you can lease the Dictaphone 6000. Circle this number and they will prove it to you.

433 on enquiry card



Twinlock Multistor

Ironically, the 'paperless office' always seems to end up producing more paper than it replaces, and finding space to store vital computer printouts and tape reels is often a headache. If the problem is a familiar one, Twinlock's Multistor could be the answer. Tape reels and printout binders are kept in order and easy expansion in any dimension allows you to expand the system as your needs grow. Yet it all costs less than the equivalent cupboard! Make sure you get the details — circle this number now.

434 on enquiry card



Fax it fast

It takes less than 30 seconds to transmit an A4 page of information to any destination in the world using Kalle Infotec's latest digital facsimile transceiver, the Infotec 6400. Similar in size to an office typewriter the 6400 provides a range of big machine features including high resolution scanning and printing, sophisticated operator controls and a local 'log' for management accounting. Naturally compatibility with Group III and Group II is standard. Get the facts from Kalle Infotec. Circle this number now.

430 on enquiry card



Photocopies for less than a penny each

That's the promise from Roneo with their high speed reduction copier. The Roneo Rapier 230R gives low cost, edge-to-edge, crisp clean copies everytime. The machine copies up to A3 — single sheets, books, etc — onto any kind of plain paper, letterheads, labels and transparencies. The 230R is designed with a touch sensitive panel to give trouble free copying. Features include reduction A3 to A4, A4 to A5, A3 to B4, B4 to A4, automatic document feed and sorter with security key operation to prevent 'use abuse'. Contact me for full details.

431 on enquiry card

A cut above the rest . . .

Continuous stationery can create as many problems as it solves, with paper-cutting bottlenecks holding up output. But according to Bell & Howell their Fimafold 1000 provides a low-cost solution for small or medium computer installations. The accent is on ease of use and maximum versatility, with electronic control systems keeping the operator fully informed and in complete control. Interested? Circle the number and I'll be happy to send you full details.

435 on enquiry card





Multistrike printer ribbons

The hidden costs in computing can soon mount up so we're pleased to be able to tell you about a new range of economically-priced multistrike printer ribbons from Melkron International. For those using an electronic typewriter/printer such as the Olivetti ET Series or Silver-Reed EX50/55 or EXP550, Melkron has a new multistrike ribbon which gives approximately 150,000 sharp impressions — double the yield of a similar singlestrike product. Let me put you in touch with your local Melkron dealer.

436 on enquiry card

BOS SOFTWARE

SERVING THE BUSINESS WORLD

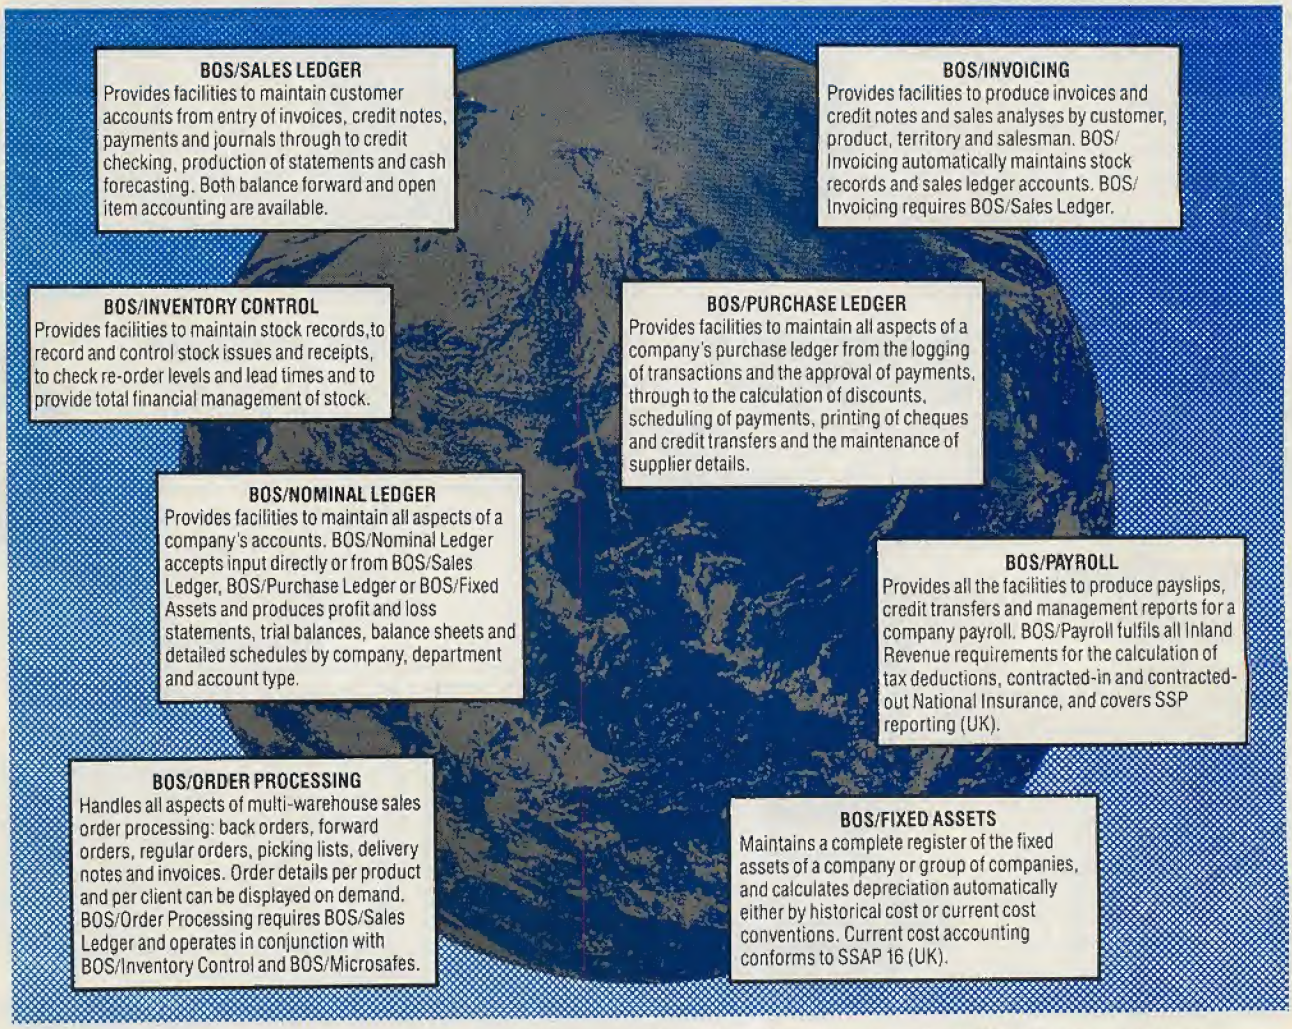

BOS/SALES LEDGER
Provides facilities to maintain customer accounts from entry of invoices, credit notes, payments and journals through to credit checking, production of statements and cash forecasting. Both balance forward and open item accounting are available.

BOS/INVOICING
Provides facilities to produce invoices and credit notes and sales analyses by customer, product, territory and salesman. BOS/Invoicing automatically maintains stock records and sales ledger accounts. BOS/Invoicing requires BOS/Sales Ledger.

BOS/INVENTORY CONTROL
Provides facilities to maintain stock records, to record and control stock issues and receipts, to check re-order levels and lead times and to provide total financial management of stock.

BOS/PURCHASE LEDGER
Provides facilities to maintain all aspects of a company's purchase ledger from the logging of transactions and the approval of payments, through to the calculation of discounts, scheduling of payments, printing of cheques and credit transfers and the maintenance of supplier details.

BOS/NOMINAL LEDGER
Provides facilities to maintain all aspects of a company's accounts. BOS/Nominal Ledger accepts input directly or from BOS/Sales Ledger, BOS/Purchase Ledger or BOS/Fixed Assets and produces profit and loss statements, trial balances, balance sheets and detailed schedules by company, department and account type.

BOS/PAYROLL
Provides all the facilities to produce payslips, credit transfers and management reports for a company payroll. BOS/Payroll fulfils all Inland Revenue requirements for the calculation of tax deductions, contracted-in and contracted-out National Insurance, and covers SSP reporting (UK).

BOS/ORDER PROCESSING
Handles all aspects of multi-warehouse sales order processing: back orders, forward orders, regular orders, picking lists, delivery notes and invoices. Order details per product and per client can be displayed on demand. BOS/Order Processing requires BOS/Sales Ledger and operates in conjunction with BOS/Inventory Control and BOS/Microsafes.

BOS/FIXED ASSETS
Maintains a complete register of the fixed assets of a company or group of companies, and calculates depreciation automatically either by historical cost or current cost conventions. Current cost accounting conforms to SSAP 16 (UK).

BOS Software's extensive experience in international software satisfies the needs of our clients, not only in the UK, but throughout the world.

Choose **BOS Business and Office Software** and you will be buying not only the most comprehensive quality range of software available for the micro market, but also **BOS Software's** five years of international experience.

BOS Software is supplied in the UK by MPSL.

For further details of **BOS Software** complete this coupon, clip to your business card or letterhead and return to **MPSL.**

MPSL, 87-89 Saffron Hill,
London EC1N 8QU, England.
Telephone: 01-831 8811 Telex: 22763

BOS
BUSINESS OPERATING SOFTWARE

Name

Company

Type of Computer

PC 1083

● Circle No. 146

PC dongles from Wordcraft

WORDCRAFT SYSTEMS first developed its dongles for Commodore and, later, Sirius micros. Now it has a version for the IBM PC. It fits into the parallel printer port — providing another port for your printer — and contains code without which your software will not run. On the good side, at least the system allows you to make security copies.

PC dongles cost £15, which is somewhat more than the £2.50 for the Vic-20 version. The minimum order is 100 so you cannot get a sample from Mike Lake, Wordcraft Systems, Oak Lodge, Farley Road, Derby DE3 6BW. Telephone: (0332) 683892.

Maximum expansion from Legend

LEGEND has introduced an expansion card which will support up to 768K of directly addressable dynamic RAM, in either 64K or 256K segments. The card maps round the address space are already used to provide the maximum possible, 1Mbyte.

Contact Legend Industries, 2,220 Scott Lake Road, Pontiac, Mi 48054. Telephone: (313) 674 0953.

0.5 Mbyte going cheap

ENCOTEL is now importing the Profit Systems RAM expansion card, which provides an extra 512K for £445. PC-DOS 2.0 is included free.

Contact Encotel Systems, 7 Imperial Way, Croydon Airport Industrial Estate, Croydon, Surrey CR0 4RR. Telephone: 01-686 9687/8

Addressbook

DECISION TECHNOLOGY has adapted its well-known Addressbook program for the IBM PC, with an XT version to follow. It is said to be easy to use and costs only £90. A WordStar interface is provided for use with Mailmerge.

Contact Decision Technology, 7 St Johns Road, East Molesey, Surrey KT8 9JH. Telephone: 01-979 5533.

KPG Hardware House is the distributor of the IDE Associates range of PC disc sub-systems. Latest products are a 3.9in. 5Mbyte removable cartridge system. Either can be fitted into a standard PC in place of an existing floppy drive, or into an external expansion unit. Installation is said to take 15 minutes. Contact KPG Hardware House, 578-586 Chiswick High Road, London W4 5RP. Telephone: 01-995 3573.

Front end revelation

REVELATION is the name of a Pick look-alike front end to PC-DOS, which is useful if you have the PC linked to an IBM Series/1 super-mini running a full version of the Pick operating system. It turns the PC into a minicomputer terminal, with access to a wide range of software, while retaining the ability to run packages under MS-DOS. A new application generator, Appgen, can be run under Pick or under Unix, providing a bridge between the two systems.

Contact Interactive Data Machines. Telephone: (0302) 786677.

Pearls of wisdom

THE SYSTEMS generator Personal Pearl has now been released in a version for the IBM PC. It not only runs under PC-DOS but also under CP/M-86 and Concurrent CP/M. Pearl is a relational database that outputs ASCII files for use in word processing and links to the Supercalc spreadsheet package. It uses the IBM's function keys, and costs £190. Contact Pearl Software, 12 Christchurch Road, Bournemouth BH1 3LD. Telephone: (0202) 20692/3.

Graffcom has been rewriting its 8080/Z-80 machine-code packages in 8086/8 code to make full use of 16-bit CPUs. The new range, designated 2020, includes word-processing, financial-planning and Configurable Manager packages. The series has just been implemented on the IBM PC. Contact: Graffcom Systems Ltd, 102 Portland Road, London W11 4LX. Telephone: 01-385 9422.

Micropro, the publisher of WordStar, now has all its software available on the PC. The latest offerings are CalcStar — improved to offer 1,300 cells — and InfoStar WordStar, SpellStar and Mailmerge are, of course, already familiar under PC-DOS. Contact Micropro International Ltd. Telephone: 01-487 5728/9.

The Strategist

ASHTON TATE, author of dBase II, has launched a new financial package called the Strategist. After you enter 31 key business assumptions, the program tells you if your proposed project will succeed or fail. The information is presented as 44 graphs and three detailed reports. Results can be sent along to dBase II. Contact Skye Quin at Ashton Tate (U.K.) Ltd. Telephone: (0908) 568866.

Edison on PC

THE EDISON portable software system runs on a PDP-11/23 minicomputer, and now also on the IBM PC with 256K of RAM. Edison is a Pascal-like language.

The Edison system includes an operating system, compiler, screen editor, text formatter, print program and assembler. For more information read Per Brinch Hansen's book *Programming a Personal Computer*, published by Prentice-Hall.

Contact Per Brinch Hansen, Computer Science Department, University of Southern California, Los Angeles, Ca 90089.

IBM XT

In the third part of our review, Jack Schofield looks at the operating system, which may not be so easy to get used to. The hard disc and PC-DOS version 2 demand a high level of literacy.

IBM'S MAIN marketing thrust of the Personal Computer has been at presenting it as user friendly. Indeed, the twin-floppy version is easy to use compared with most previous small business micros. This is due to PC-DOS, the IBM version of Microsoft's MS-DOS, and the high quality of much PC software. While PC-DOS is no one's idea of the perfect operating system, it is easier to learn than CP/M. However, with the hard disc version of the IBM PC, the XT, and the essential PC-DOS version 2 the system moves to a higher level of difficulty.

There are several reasons for this. First, DOS 2 has more commands and is inherently more complex than DOS 1; it is not just bigger. Second, controlling the hard disc requires a much more organised approach to keeping files and back-ups. Third, very little current software has been written with hard disc operation in mind. The result is that the IBM XT is currently a much less viable option for the newcomer to computing. At the very least, the typical XT user will require a higher level of dealer support, and greater personal commitment.

This is not because of the hard disc itself, which is big, fast and in principle works just like a floppy. It also takes up the same amount of room but it has two platters, giving four surfaces for data storage. Each surface has 306 tracks of 17 sectors, compared to 40 or 80 tracks on a single- or double-sided 5.25in. floppy. The total storage is thus about 10Mbytes, which is the equivalent of 32 of the 320K standard floppy discs. Access time, the time to read an item of data, is up to 10 times quicker.

IBM does not disclose the manufacturer of the fitted hard disc; likely sources are Seagate Technology of California and Miniscribe Corporation of Colorado. When the XT goes into production in Scotland in November there may be an opening for a Scottish disc. The disc in the XT supplied for review offered initial formatted storage of 10,592,256 bytes or 10,344K. Even after copying on the DOS 2 system files there was more than 10Mbyte free. Such information is very simple to

discover using the ChkDsk utility from DOS, which lists hidden files like DOS.SYS and IO.SYS separately.

The main new commands in DOS 2 are Assign, Backup, Break, Cls, Ctty, Echo, If, For, Shift, Goto, Graphics, Mkdir, Rmdir, Chdir, Path, Prompt, Recover, Restore, Set, Tree, Ver, Verify and Vol. There are four new characters, <, >, | and \. Also some of the existing DOS commands have been enhanced, mainly to cater for hard disc operation.

Backup has been added to allow the contents of the hard disc to be copied to floppy discs, since IBM do not have any kind of tape streamer or cartridge to do this. The simple command Backup C:\ A:/S backs up all the files on C, including those hidden in subdirectories. DOS makes a note in the directory whenever it writes to a file, so the \M parameter is provided to back up only those files which have been modified since the last back up was done. DOS also keeps time and date records, so the \D parameter is provided to back up only those files created after a certain date. That will make you wish you had entered the date every day when booting PC-DOS. In all cases, Restore is used to copy the files back onto the hard disc. In most other respects Backup seems to work like the usual Copy command.

In general the new commands make using DOS 2 much more like using a language than using an operating system. The user is involved in numerous little bits of programming using Copy.Con, an abbreviation of copy from console, to create a file which sends commands just as though they had been typed in at the keyboard. Thus it is the equivalent of Submit in CP/M. Copy.Con is used to create Autoexec and other batch files which enable programs to be customised, so they can be run by inexperienced users. With the Echo Off command the process can be made invisible. Variables can be included using the % sign. Using Goto, For, To, and Cls to clear the screen, it is not unlike programming in Basic except that the system provides virtually no help with debugging.

Most of the other new commands are connected with the provision of tree-structured files, through which DOS 2 is made to resemble Unix — specifically, the Microsoft version called Xenix. The idea is to divide the hard disc into a series of directories, created by typing Md or MkDir for Make Directory. This directory then contains files or sub-directories, which in turn contain files, and so on down through as many levels as you require. The only limitation is that the Path must not be more than 63 characters long.

You start in the root directory but can change to a subdirectory by typing Cd or ChDir for change directory. Typing Dir at the root level lists only files in the root directory and sub-directories, which are identified by <DIR>. Typing Dir inside a sub-directory lists only files in that directory and the names of sub-sub-directories. The root directory is then effectively invisible to the system. The particular directories and files in use can be specified by the Path command. Thus it is simple to set up a password system where the password takes users only to their own set of files, so several different users could use the same machine.

For example, the root directory could contain half a dozen .Bat files for main applications such as word processing, financial planning, etc. Selecting one from a list Echoed to the screen, then typing a name or password could take the user into a directory containing only their own files for

(continued on next page)

```
C>COPY CON:LOGON.BAT
ECHO OFF
CLS
ECHO YOUR PASSWORD IS BEING CHECKED
IF %1==JACK GOTO A
ECHO ACCESS DENIED. GET LOST!
ECHO OFF
GOTO END
:A
ECHO PASS, FRIEND
ECHO ENTER YOUR COMMAND
ECHO A = WORD PROCESSING
ECHO B = MULTIPLAN
ECHO C = STRIP POKER
:END
^Z
        1 File(s) copied
```

Listing 1. A PC-DOS program which shows how you might write password system. Typing Logon Jack offers a slection of programs in a menu, whereas Logon Fred results in a Get Lost message. With more users the variable %1 would have to be compared with other possible entries. Also, it would have to be an Autoexec.Bat file and not send unwanted users straight into the system at :End, but this is just for illustration. Note that three more files have to be created, A.Bat, B.Bat and C.Bat, to run the programs from the menu. Listing 2 changes the directory to MP\JACK and runs MultiPlan, MP.

```
C>COPY CON:B.BAT
CD\MP\%1
PATH\MP
CD
MP
^Z
      1 File(s) copied
```

Listing 2. This routine changes the directory to MP/JACK and runs Multiplan, MP.

Specification

SYSTEM
CPU: Intel 8088 HMOS pseudo 16-bit running at 4.77MHz
Memory: 128K of RAM expandable to 640K; 40K of ROM with socket for expansion to 48K
Discs: single 5.25in. mini-floppy with 360K of formatted storage, plus 10Mbyte Winchester hard disc
Features: 62-pin expansion slots for six full and two short expansion cards, but four slots are required to run basic system.
Interfaces: cards for mono display/parallel printer and asynchronous communications supplied as standard
Dimensions: 500mm. x 410mm. x 124mm.

DISPLAY
Type: 11.5in. green phosphor screen with brightness and contrast controls
Display: 25 lines by 80 characters
Dimensions: 380mm. x 350mm. x 280mm.; 7.9kg. weight

KEYBOARD
Type: two-tone Selectric-style qwerty with 85 sculpted keys, including 10 function keys and 10-key cursor control/numeric keypad
Features: Intel 8084 microprocessor control including 2K of ROM, 20-key buffer and n-key rollover; legs to provide tilt.
Dimensions: 500mm. x 200mm. x 57mm.; 2.8kg. weight.

PRINTER
Type: 80cps. graphics nine-pin dot-matrix printer, Epson MX-80, with parallel interface
Features: tractor feed; range of print styles; stylish perspex stand is optional extra but recommended as it keeps the cables out of the paper feed
Dimensions: 374mm. x 305mm. x 107mm.; 5.5kg. weight

SOURCE
Manufacturer: IBM, available via dealer network
Contact: IBM United Kingdom Ltd, North Harbour, Baltic House, Portsmouth PO6 3AU

(continued from previous page)

that particular application. The Path structure might then be something like

Path\Multiplan\Accounts\Fred

Fred would avoid all confusion with similar files created by Jim in Sales, whose directory would be found by

Path\Multiplan\Sales\Jim

The program can even include If Exist, to see if a file or directory exists, and MkDir to create a sub-directory; for example, for a new user, if it does not. But this is not really a multi-user system nor multi-tasking, and would not meet any company's idea of security. The line "Echo Oh dear, someone erased your file" might well come in useful.

Setting up the system obviously involves a lot of messing about with directories, but fortunately DOS 2 provides facilities to do this. For example, Dir|Sort will produce a directory which is sorted into alphabetical order. Dir|Sort > JimFiles will create a file called JimFiles and pipe the sorted listing to it. It can then be displayed on the screen using Type, or printed out. Numerical sorts can be done, and Dir|Sort/25 will sort files into chronological order, that is, by the 25th column which holds the date.

But operating DOS 2 is not all plain sailing, and the Path instruction proved to be a problem in practice; the system will operate happily inside a sub-directory, but will not fetch files from outside it. According to the manual, specifying a Path such as

Path\Multiplan; \Multiplan\Jim; A: \Sales

should send DOS to look in the current drive, C, then into the Multiplan subdirectory, then into Jim's Multiplan subdirectory, then to drive A, until it finds the file it is looking for. Whether I am misreading the manual or simply failing to observe the incredibly tortuous syntax I do not know, but I cannot make it work.

When running commercial software the Path command seems to be totally ignored by DOS 2. Multiplan is one of the few programs that runs happily from the XT hard disc. The Trendtext/2 word processor gave problems by booting from C but then going to drive A for all subsequent files. The program as configured would not even accept C: as a drive identifier, so not even text files could be saved to the hard disc. TK! Solver, reviewed in our August issue, is copy-protected so it has to be run from floppy drive A anyway. However, it refuses to recognise the existence of drive C, no matter how configured. The only way round it is to Assign C to be B — no fun.

Tomorrow's Office is supplied on six floppy discs which makes it a strong candidate for hard disc operation, otherwise you have to change discs the whole time; at its launch the program was demonstrated on the IBM XT. Again, however, the early review sample supplied proved impossible to configure for the XT in our office. Even when it could be instructed to look through C for files known to be on C, the program would hang up while waiting for the user to insert a disc in drive C.

Inserting a floppy into the IBM hard disc is not a pastime to be encouraged, and Sosoft has responded with an improved version of the product to match the XT. However, not every company is likely to meet the challenge quickly, and not every software package will be easy to change. The Bristol Software Factory, producers of Silicon Office, has complained publicly about the situation. In the weekly trade publication *Computing*, August 4, Mike McDonald said he suspected there was a hardware difference in the interface with the machine's operating system which gave difficulties.

So while some programs can be run from one drive some, like Context MBA, require two drives and cannot be run at all. In any event the most likely result s that the poor user who pays out a large amount of money for permanent ownership of an XT ends up with a single-floppy micro with a built-in 10Mbyte back-up disc.

Obviously this situation is going to change. IBM can currently sell XT's faster than they can make them and a queue is building up outside the sales department. The potential for software sales is immense, and the supply will arise to satisfy that demand. However, it does mean there is little benefit for the ordinary user in being near the head of the queue.

In the long term the XT looks like a winner. The average small-business micro user will find that the ergonomic excellence of the IBM XT, the generous 256K of RAM, and the vast capacity of the hard disc a real boon. Switching from an ordinary eight-bit twin-floppy CP/M machine to the XT is like going from a Metro to a Mercedes. Both get you from A to B but there are differences in style, comfort and convenience, as well as cost.

It is a kind of comfort and convenience that most serious users plan to get used to. With the cost of hard discs dropping significantly at the moment, and with the mass of software and add-on accessories becoming available for the IBM, the XT version looks very much like being the Apple II of the next five years. It is hard to think of a higher compliment than that.

Screen display which results from running the logon batch file.

```
YOUR PASSWORD IS BEING CHECKED
PASS, FRIEND
ENTER YOUR COMMAND
A = WORD PROCESSING
B = MULTIPLAN
C = STRIP POKER

C>CHKDSK
Volume JACK          created Jan 1, 1980 12:04a
```

Screen display from running the check disc utility for hard disc C.

```
 10592256 bytes total disk space
    28672 bytes in 3 hidden files
     4096 bytes in 1 directories
   708608 bytes in 89 user files
  9850880 bytes available on disk

   262144 bytes total memory
   237328 bytes free
```

Conclusions

● The IBM XT with monochrome monitor and printer represents a well designed and well integrated system, which has great versatility and no obvious bugs. Ergonomically the system is outstanding.

● The keyboard has an excellent touch, but the placing of four or five keys may create problems for some people.

● Personal Computer DOS 2.0 is larger, more complex and more sophisticated than the previous versions. It is harder to learn, but the facilities offered will repay study. Many DOS 2 facilities are usable on twin-floppy machines as well as on the hard disc version reviewed.

● DOS 2 offers a learning path and an upgrade path into Xenix, the Microsoft version of Unix.

● Basica has been enhanced for the XT, and again the extra facilities are available to non-XT users. The language is not particularly fast or powerful, but contains an enormous number of commands.

● The XT hard disc requires a lot of effort to organise, but after that should prove trouble free in operation. That there is no alternative to backing up onto floppy discs is to be regretted.

● The system as reviewed, with 256K of RAM, graphics printer plus stand, and all cards and cables costs £5,200 plus VAT from IBM Retail Centres. This makes it good but not exceptional value. However, as the price drops over the coming years the XT could well become the standard small-business micro.

BBC Compatible DISK DRIVES

DEALER DISCOUNTS AVAILABLE

Illustrated with
⅔ height drives (57mm high) the case
also accommodates slim line ½ height drives (41mm high) — colour matches BBC micro

TWIN 40 track single sided (200K) cased with professional grade switch mode PSU ... £360 + £10 P & P + VAT = £425.50
TWIN 40 track double sided (400K) cased with professional grade switch mode PSU ... £480 + £10 P & P + VAT = £563.50
TWIN 80 track double sided (800K) cased with professional grade switch PSU ... £610 + £10 P & P + VAT = £713.00

CASE AND POWER SUPPLY

only (without drive)
£60 + £5 P & P + VAT = £74.75
Slimline switch mode power supply used for 2 drives.

CASE ONLY
(Measures W 300mm x D 350mm x H 57mm)
. . . . . £25 + £5 P & P + VAT = £34.50
(Please state drive size – ½ (41mm high) or ⅔ (57mm high) height)
SWITCH MODE POWER SUPPLY Suitable for TEAC, MITSUBISHI, CANON, BASF drives.
Slim line (W 98mm x D 200mm x H 45mm) + 5V @ 3A, + 12V @ 2.5A fully regulated complete with cover
. . . . . £45 + £5 P & P + VAT = £57.50
DISK FORMAT PROGRAM
for BBC micro . . . . . £15 + £2 P & P + VAT = £19.55
BARE DRIVES are also available at competitive prices.
Please telephone for details.

JUST ARRIVED

68000 BASED HIGH RESOLUTION GRAPHICS BOARD

- Uses superfast 68000 CPU
- Uses the new revolutionary 7220 graphic chip
- Incredible 1024 x 1024 resolution in one plane
- GKS (graphic kernel system) supported
- Usable either as stand alone or with another computer (8255 interface chip)
- 32K RAM/ROM (8K for system commands)
  128K RAM for graphic, 16K for user program
  . . . . . £699 + £10 P & P + VAT = £815.35

WORLD'S FIRST INTELLIGENT ASCII KEYBOARD

Mikrokey III

- True micropressor — based (uses 6809 CPU, 2K RAM and EPROM)
- III (including 19 function keys and separate numeric and cursor pads) keys
- All function keys are freely programmable via "PROG" key
- Auto repeat on all keys (user selectable frequency)
- Alpha lock, shift lock, MSB, 2 key rollover
- LED display of HEX values
- Serial (selectable baud rates) or Parallel operation (please indicate choice)
- Housed in beautiful low profile two tone beige case (W528 mm, D 198 mm, H 57 mm)
- Comes complete with cable and connector

£295 + £5 P&P + VAT = £345

NEW FROM EPSON *Models FX80 and RX80*



Model FX80 super fast dot matrix printer

- 80, 137 column
- 160 CPS print speed (100 CPS for RX80)
- 96 character ASC11 + up to 256 down-loadable user defined characters
- Proportional spacing
- Sub-script, Super-script
- Dot addressable graphics
- Tractor and friction feed (Tractor only for RX80)

FX80 . . . . . £398 + £10 P & P + VAT = £469.20
RX80 . . . . . £298 + £10 P & P + VAT = £354.20

STAR DP510

The best price/performance printer only
£298 + £10 p&P +VAT = £354.20
(RRP £349 + VAT!)

Star DP 510 – 80 column

An astronomical array of features at a down-to-earth price.

- 100 CPS bi-directional logic seeking
- 9 × 9 matrix — true descenders
- 2.3 K buffer as standard
- Friction, tractor, roll holder
- Hi-Res and block graphics
- Subscripts (H_2SO_4) and superscripts
- Italic printing
- Centronics as standard (optional serial interface)
- Auto underline
- Vertical & horizontal tabs
- Left and right margin set
- Skip over perforation
- Backspace
- Self test
- International characters
- Serial interface £75 + VAT

LOW PROFILE PROFESSIONAL METAL CASE FOR COMPUTER SYSTEMS



houses Micronix 80HD, ⅔ height 5¼" floppies (½ height floppies optional), a switch mode power supply for the complete system. The panels have cutouts for floppies, connectors and a fan (as illustrated). Thoughtfully constructed for easy accessibility. Cover and base grey/beige. Frame dark brown.
Case for ⅔ height floppies £90 + £10 P & P + VAT = £115
Case for ½ height floppies £95 + £10 P & P + VAT = £120.75

Back

SWITCH MODE SLIMLINE POWER SUPPLY



Measures only: 60mm H x 120mm W x 248mm D
Input: 220/240V 50Hz
Output: +5V @ 7A; +12V @ 3A;
—5V @ 1A; —12V @ 1A;
Enough power for Single Board Micro, 2 Mini Floppies & CRT. 88 Watts.
ONLY £77 + £3 P & P + VAT = £92 inc.

micronix computers Ltd
(formerly Vincelord Ltd).
Suite 2, 26 Charing Cross Road, London WC2. Tel. 01-240 0213/0217. Telex. 295173 VILORD G

● Circle No. 147

LOGICA VITESSE

Chris Bidmead reviews a 16-bit micro from a leading U.K. manufacturer, which is also sold as a dedicated word processor and under the Merlin label by British Telecom.

THE VITESSE from Logica is a good-looking relatively simple 8086 micro-computer that comes in a pleasantly designed cream box measuring 34cm. by 46cm. and standing 25cm. high. This main unit holds the processing electronics and a pair of sensible capactiy 592K mini-floppy drives. The tiltable screen and its keyboard are packaged as separate modules.

The illuminated main power switch is on the front panel of the processor unit; after switching it on and waiting 10 seconds the screen comes alive with the single prompt

Disk

and a symbol of a rectangle and a backward-pointing arrow. The same symbol is used on the keyboard to identifiy Carriage Return. With a system disc in drive 1, hitting Carriage Return — or any other key — triggers the CP/M-86 boot sequence. There is no debugging PROM monitor below operating-system level.

In most implementations of the eight-bit progenitor, CP/M-80, the operating system is small enough to fit on the outermost track, track 0, of a floppy disc. The first few bytes of track 0 will be a very simple loader routine supplied by the hardware manufacturer to read in the rest of the system track and make sure it is placed correctly in RAM.

CP/M-86 works in a very similar way, except that the operating system is too large to fit on a single track, and is therefore represented by a file called CP/M.Sys. It still needs a loader on booting up, which is kept on track 0 as in the eight-bit version. ROM initiates the loader, the loader fetches CP/M.Sys and then the system is booted.

As far as I know all CP/M-86 implementations work like this, and MS-DOS is similar though its system software is split across several files. The working of the loader is worth mentioning, however, because one of my main criticisms of this machine centres around this point.

The system disc supplied by Logica has only two files on it, CPM.Sys and a file called CPM.H86, which turns out to be a hex version of CPM.Sys. It serves no function, and I am baffled as to why Logica has included it and bothered to document its presence. It would be more helpful to have the rest of the standard CP/M utilities on the same disc, but for some reason they are supplied separately.

The keyboard is uncramped, with

Benchmarks

Running the standard bechnmarks on the Logica under Microsoft Basic-86 revision 5.22 revealed a relatively slow machine, considering it uses an Intel 8086 microprocessor like the speedy OEM Orion.

	1	2	3	4	5	6	7	8	Average
Logica VTS	1.8	6.2	13.0	13.5	15.5	28.9	44.9	35.0	19.85
Zenith Z-110	1.5	5.1	10.6	11.0	12.8	24.3	25.5	28.5	14.9
IBM PC	1.2	4.8	11.7	12.2	13.4	23.3	37.4	36.9	17.6
OEM Orion	0.6	2.1	4.8	4.9	5.8	10.5	16.7	13.0	7.3

height adjusters on the underside. The separate key clusters are well spaced out, and two shades of amber are used to differentiate the QWERTY keys from the function and numeric keys. Yet in practice the keyboard is less promising than it looks. Some crucial keys are in odd places: the Control key is on the right-hand side, the Backspace is on the left-hand side, and marked Erase Char, and there is a key called Back Tab where you would expect to find a Backslash.

The top row of the QWERTY keys present a confused appearance, their tops being engraved with three characters rather than the usual two. On some of the keys the additional character is generated by holding down the Special key, but on others the connection between the key top and generated character appears to be arbitrary. The useful feature of Caps Lock is provided to hold alpha characters in upper case without shifting the other keys. It is a common enough feature on computer keyboards, and is usually implemented on a single On-Latch/Off key. On the Vitesse you have to hold down Special and "." to set alpha lock and Special and "." to release it.

Some of the keys carry mnemonics that are valid in the context of CP/M: Clear Cmd sends Control-Z to cancel the command line, Retyp Cmd sends Control-Re, Scrll On/Off sends Control-S. But many others are inscribed with names like Col Retrn, Mode Lock and Erase Word that bear no relation to the operating system or the software provided.

The handily placed array of 12 function keys are unimplemented, beeping at you if you if you try to use them, and the cursor keys send out control codes that are echoed on the screen to no very good effect. This last point will come as no surprise to CP/M veterans but, with the IBM PC and so many other new-generation machines offering cursor keys that remain meaningful at operating-system level, would-be customers are going to need some swift sales patter to smooth the rough edges.

The large 15in. amber screen is stable, very easy to read and definitely the best feature of the hardware. It operates in two modes. One is plain and simple with 24 lines by 80 columns while the other offers a message line at the top of the screen, reducing the work area to 22 lines by 80 columns.

The message line carries information about the status of the printer, the position of the cursor and — a useful touch this — translates the current I/O byte into the mnemonics used by Stat and Pip. Thus it keeps you permanently informed about the logical-to-physical I/O linkages.

Ideally the message line would be controlled by dedicated hardware in the monitor, as with the more sophisticated serial terminals like the Cifer range, but on the Vitesse it is a software emulation. Switching it on, using the dedicated SCN Switch key, involves a warm boot of the operating system. If you hit this switch while inside an applications program to see whether the printer is ready, you will be disappointed to find yourself back at the CP/M command line.

The review system arrived with discs for Micromodeller and Mars but no documentation for these programs. Despite repeated promises that the manuals were on their way there was still no sign of them by press day. A more serious disappointment was the absence of Wordsworth, Logica's own word processor, scheduled as the main feature of this review but withdrawn by Logica at the last minute as not yet ready for exposure.

Digital Research's complete documentation for CP/M-86 was provided, along with provisional documentation for Microsoft's MBasic. This language is now effectively unsupported under CP/M due to the internecine strife between the two operating-sytem vendors.

One improvement CP/M-86 offers over CP/M-80 is the provision of a Help utility that explains how the various CP/M routines work. Logica salesman are going to have to do some more smooth talking to explain why Tod, the standard date and time utility documented within Help, is nowhere to be found on the utilities disc, Copydisk is explained there too:

Copies all information on one disc to another disc, including the CP/M system tracks if they are present on the source disc . . .

"System tracks" includes the vital loader on track 0 I mentioned earlier and that brings me to my main objection to Logica's approach.

Digital Research recognised very early on that, one valued aspect of the microcomputer, unlike the main-frame, was the user's maximum independence from the manufacturer. In this spirit, CP/M routinely comes with a set of utilities to create new versions of the system on blank discs. One of these is Sysgen, the system-generation utility. Another standard way of creating new system discs is by using Copydisk, directly transferring all the tracks, including track 0, from one disc to another.

As with Tod you will look in vain for Sysgen and Copydisk among the CP/M utilities offered with the Vitesse. Instead there is a utility called Backup, a track-to-track copier written by Logica that expressly omits transferring track 0. Logica is allowing you to create data discs and copy them, but has gone out of its way to make sure you will never be able to generate new system discs.

This is a mainframe marketing strategy designed to tie the user closely to the manufacturer. Readers of this magazine will have picked up the feel of the micro world enough to know that this is not what micros are about. I hope no amount of saleman's rodomontade will persuade them otherwise.

With such an extensive choice of dual-floppy micros available, customers can avoid this problem very simply. If they stay away from the Vitesse on this account Logica can hardly complain. The company might even be grateful — that way it can be absolutely sure nobody is copying its treasured system discs.

Let's hope Logica quickly changes its mind and falls in with the more neighbourly behaviour adopted by the majority of micro manufacturers. It would be a pity if such an amiable machine, with a large friendly screen and a fast, true 16-bit processor were given the cold shoulder on account of an old-fashion, misapplied marketing ploy.

Specification

SYSTEM
CPU: 8086 true 16-bit processor
Memory: from 64K to 516K; review model had 256K
Discs: twin 5.25in. 592K drives; literature suggests the intention to offer IMbyte drives
Interfaces: Centronics; optional RS-232C
Dimensions: 34cm. × 46cm. × 25cm.

DISPLAY
Type: 15in. orange phosphor
Display: 24 lines × 80 characters with 22 line option; seven-by-nine dot matrix, reverse video, bold, underline
Dimensions: 35cm. × 37cm. × 38cm.

KEYBOARD
Type: detached, international standard full QWERTY pad
Features: Calculator-style numeric keypad with 18 keys; 12 programmable function keys, disabled
Dimensions: 48cm. × 20cm., height adjustable

Manufacturer: Logica VTS Ltd, 86 Newman Street, London W1A 4SE. Telephone: 01-637 5171.
Price: £2,490 for 64K system

Conclusions

● The Logica Vitesse has been developed from the company's dedicated word-processor the VTS. The development is still in progress, and at the moment the system presents some rather ragged edges.
● The hardware looks good and is pleasant to use. The screen in particular is large, with very legible orange characters.
● The operating system is an incomplete version of CP/M-86, a historic piece of software that has not really seized the opportunities offered by the 16-bit environment. MS-DOS 2 and Concurrent CP/M have been available to OEMs since January. MS-DOS 2 would seem to be a natural choice, as Logica is the U.K. guardian of Microsoft's Xenix.
● Following in the leaden footsteps of Dec, Logica is apron-stringing its customers by withholding the facilities for creating system discs.

Technological Achievement in Office Automation Systems

Logica VTS supplies word processing, personal computing, local area networking and multi-user office systems.

■ **Word Processing**
Logica VTS is Britain's largest manufacturer of Word Processors.

■ **Personal Computing**
The 'Vitesse' 16-bit Personal Computer was selected by CCTA for Central Government Departments.

■ **Office Systems**
Multi-function office workstations linked by high speed Local Area Networks.

Logica VTS is already developing the office automation products for the next decade.

If you require further information, contact: Marketing Manager,

logica VTS

Logica VTS Limited,
86, Newman Street,
London W1A 4SE
Telephone 01 637 5171
Telex: 27200

1983
THE QUEEN'S AWARD FOR TECHNOLOGICAL ACHIEVEMENT

ELECTRON

Acorn's long awaited Electron is here. It is smaller and cheaper than the BBC Micros, but the machines have a lot in common. Neville Maude thinks it should do well.

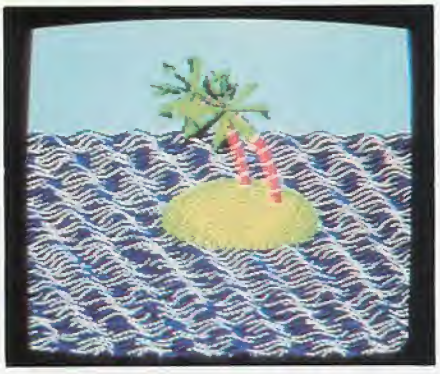

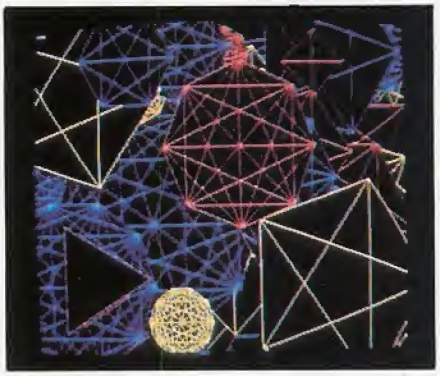

A Welcome tape is provided which follows the BBC Micro style. It includes Polygon; Island, where the waves move; and Draw, the horizontals and verticals are fine, diagonals difficult, and curves almost impossible.

Specification

CPU: 6502A running at 2MHz
Memory: two 16K ROM/EPROM chips plus 32K of RAM from four chips
Keyboard: 56 typewriter keys in QWERTY layout
Ports: UHF TV, video, RGB monitor and cassette ports; expansion bus
Features: colour graphics and sound; number keys used as function keys; optional single-key Basic keyword entry; user-definable characters
Notable ommissions: BBC Mode 7; no joystick ports
Power supply: separate, 19V 14W
Dimension: 343mm. × 159mm. × 57mm.
Origin: assembled in Malaysia for Acorn Computers, Fulbourn Road, Cherry Hinton, Cambridge CB1 4JN
Price: £199

Technical details

The 6502A processor runs at 2MHz when accessing ROM, but in the Electron at 1MHz from RAM. This is because the RAM is in four 64K by 1-bit chips, for cheapness, so every access needs two operations.

In modes 0,1 and 2 the RAM access of the video part of the ULA is interleaved between the 6502A access. For 40μs out of 64 the processor is out of action. In mode 3 the processor is running full speed on alternate lines. In modes 4, 5, and 6 it runs at 1MHz all the time it accesses RAM. Hence a program taking 10 seconds on the BBC in all modes can take on the Electron about 43secs in modes 0,1, and 2, about 34secs in mode 3, and 20secs in modes 4,5 and 6.

A trick is to draw graphics by shifting the Electron into its faster modes during the drawing period and then back again. The screen display will be somewhat strange during that period but become normal at the end.

The ULA register of mode is in &FE07, a write-only register, and the operating system uses &0283. So program inserts could be something like:

```
500 DEFPROCquick
510 ?&FE07 = &B0
520 ENDPROC
  (PROGRAM)
900 DEFPROCslow
910 ?&DE07 = ?&0282
920 ENDPROC
```

Of course, this does not help to speed up programs where the graphic display is used not just drawn, but it helps with those like Persian, in both manuals, where one looks at the results. Times for this are about 34secs on the BBC, 50secs with Procquick on the Electron or 105secs unaided.

THE ELECTRON is small, neat — less than half the size of its ancestral BBC Micros. The finish, including keys, is light cream and mainly plastic which contributes to its light weight.

The mains transformer, 19V 14W, is separate and has an integral three-pin plug, which is rather large, 3.5in. by 2.5in. by 2.65in., excluding prongs. This can cause problems with some switched sockets or double sockets when two plugs are being used. The advantage of having only low voltage reaching the computer is obvious, especially for children, there is also no heating problem in the main casing. The transformer appears to have a thermal overload cut-out — a good idea.

The nominal RAM is 32K, which is not immediately apparent from the instruction books. If one asks the computer now much RAM is spare, with the standard phrase

```
DIM P%:PRINT HIMEM – P%
```

the answer is 20,990. It is because the Electron does not support the teletext mode 7. The nearest is mode 6, see table, which needs about 8K as compared with mode 7 which uses 1K. Apart from this ommission the modes are the same as for the Model B, not the A — a real achievement in so low-priced a micro. The high-definition modes 0,1, and 2 need 20K as they do with Model B but this is unavoidable, for example, mode 5 permits 16 colours with 160 by 256 pixels. In general the graphics are outstandingly good though slower than the Model B.

The standard question to determine the operating system with these micros is *Help and the Electron replies with 1.0 OS, not the latest 1.2. However, it is versatile with plenty of *FX commands. Indeed, there are a couple which the Model B does not have, namely *FX226 which sets the base number for Func A to P, and *FX227 which does the same for Func Q to /.

There are four sockets on the left of the computer, not the right as shown in the manual, and these are labelled underneath the case, UHF TV, video, RGB, cassette. The video socket is for a monochrome monitor and the DIN socket for the cassette player is for 1,200 baud, not alterable to 300 baud. There is also a multi-pin connector under the body, thoughtfully shielded with plastic in case anyone puts the micro on a metal projection. Presumably this will be used in conjunction with the first add-on for the Electron which is called the Elk. It is a general-purpose module to enable sideways ROMs, printer interface, games paddle sockets and RS-232.

Mode	Characters	Pixels	Colour	Memory
0	80 × 32	640 × 256	2	20K
1	40 × 32	320 × 256	4	20K
2	20 × 32	160 × 256	16	20K
3	80 × 25	TEXT	2	16K
4	40 × 32	320 × 256	2	10K
5	20 × 32	160 × 256	4	10K
6	40 × 25	TEXT	2	8K

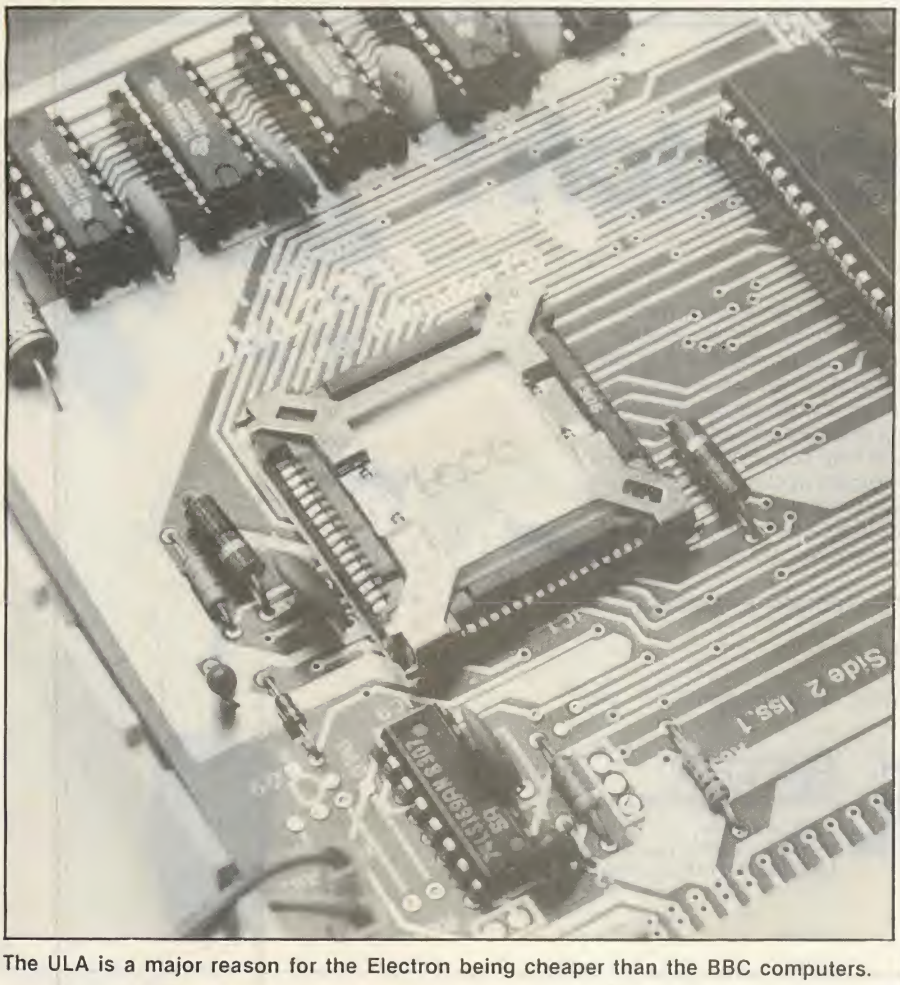

The ULA is a major reason for the Electron being cheaper than the BBC computers.

The ULA is a large one, about 30mm. by 30mm. with 68 connections. It controls the colour palette and takes over the CRT controller action of the 6845 in the Model B.

But the Electron has no 6845, so there can be no sidways scrolling as used in games such as Planetoid. Internal timing is also taken over by the ULA, as is sound. This is less complicated than the BBC method. To allow reasonable compatibility between the two micros there are three tone channels and one for noise. However, only one tone channel at a time can be used on the Electron and the envelope is also more simple, most people will find it still complex enough.

If tested for speed using the statutary benchmarks the Electron runs about 30 to 40 percent slower. Arithmetical computations are the slowest but, since the BBC Basic is so fast the Electron is still doing well.

If one tries to load a BBC cassette into the Electron the the title page usually comes out as monochrome hash — not always. The main program generally loads but then runs like an arthritic snail, about 2.0 to 4.3 times slower than it should. The Electron does its best, for example, it interprets mode 7 as mode 6 instead of just stopping, and since it cannot implement the double-height BBC command for titles it just prints two identical normal-height lines. The programs on the Electron Welcome tape ran perfectly on the Model B, but at present it is not known if the versions of Snapper, etc., being rewritten for the Electron will be perfectly compatible on the Model B. As a very rough rule, programs for the BBC Micros will not work on the Electron unless altered; programs for the Electron probably will work on the BBC but may not take advantage of all BBC facilities.

The Electron keyboard is a real one, not rubberised plastic, an experienced typist reported that she was perfectly happy with it. The construction is a little cheaper than that of the Model B but is still good. The number of keys has been reduced and both the user-programmable keys and the cursor keys are combined with others. A function key may be used in conjunction with 29 keys to give Basic keywords. For example, Print may be entered in full or as P or Func P, so the Electron has the best of both worlds. There are two ommissions, Tab and the shift lock, but those who never had them will presumably not miss them.

In general the Electron keyboard is easier to learn than the BBC and considerable thought has gone into making it simple.

(continued on next page)

ELECTRON

(continued from previous page)

The programmable keys run from 1 to 9 and then 0, as distinct from the BBC 0 to 9 series. The change means that the numeric and f values are the same on the same keys. Only one definition can be put in each programmable key, not three as in old BBC. Small hands will find it easier to reach keys without stretching, a useful point since most Electron users will be young.

The Electron comes with a user guide, 290 pages, in a ring binder. It is smaller than the BBC one, partly because there is less to descibe but also because it is written more simply. Apart from not having an index it is a really superb book with better organised information than in the more detailed BBC manual. Those who have trouble with the BBC could try this volume as an alternative, if available separately, since much of the information is similar.

Another book supplied is *Start Programming with the Electron*; again this is excellent, much better than most other books written to help learning to program the BBC computer. One hopes the authors will produce a companion book for the BBC, otherwise this one will help to get started with both.

A Welcome tape is provided which follows the successful pattern with small improvements from experience. Some programs, such as Patterns, are much the same. Gomuku has come in from the BBC games of strategy cassette, Island is from Acornsoft's graphics book and others are new. A two metre coaxial lead is provided for connection with a television set, production machines will also have a lead for the cassette player.

Many comparisons have been made between the Electron and the BBC micro; unavoidable as the latter is a known machine and the two have so much in common. Nevertheless, in the market place the contest will be between the Electron and micros costing less than £200 — a crowded arena. The Electron should do well as it has many advantages over the present competition. Others will arrive, in particular there are Ataris on the way; the 600XL and 800XL should come in this price range and are said to be compatible with the vast range of existing software. It is not impossible for Acorn to reduce its price should it become necessary. Acorn's decision not to release machines to software houses prior to the launch is interesting. On one hand it gives Acorn about two months lead with its 10 or so cassettes which are the first to be converted, on the other hand software sells computers.

The Electron will go out to dealers and high street chains. Acorn projects sales of 100,000 by Christmas with W H Smith stocking it and then perhaps Boots. The Electron should carry BBC Basic into many more homes and it is anticipated children will use the BBC at school and the Electron at home. Curry is quoted as saying "The BBC is happy because they see it as support for the language, making it as standard as possible."

Conclusions

● The Electron is an excellent micro for the money. It is rumoured it will sell for £199. It is a little unfair to compare it with the Model B which costs more than twice as much.

● The Electron will sell well at the cheaper end of the market place and the first add-on module should be available almost immediately after the launch.

● The Electron is not a replacement for the Model A; the Electron cannot be upgraded to a Model B, as could the A. Even when all add-ons are available, which will make the cost higher than a Model B, the result will still be an augmented Electron, not a B.

● Backing will be good; books for the Electron have been written and a users club has been announced.

● The Electron has a good keyboard, colour, graphics and Basic plus strong connections in the educational field. It can be recommended as a first computer on which to learn, or as a step up from still cheaper types such as the ZX-81.

SYMBIOTIC
COMPUTER SYSTEMS LIMITED

SYMBFILE
5¼" WINCHESTER SUB SYSTEM

e SYMBFILE hard disk subsystem is a complete add-on mass storage tem for the Apple][,][+,][E, or /// microcomputers and is at present ng developed for the SIRIUS, IBM PC and the BBC micro. It is npatible with the majority of hardware products currently available the Apple, including the 16K Language card and 80-column cards. MBFILES are available in sizes from 5-21 megabytes.
Full DOS, Pascal, and CP/M support allows any standard application tware, including database, word processing, and accounting kages to be used.

SYMBSTORE
TAPE STREAMING BACK UP

SYMBSTORE is the perfect complement to SYMBFILE giving a high speed, totally reliable back up system. SYMBSTORE will copy the entire contents of a SYMBFILE to a C60 type digital cassette. SYMBSTORE'S unique multiple buffer verification ensures the perfect transfer of data. Software to individually back up volumes and files under present operating systems will soon be available on request.

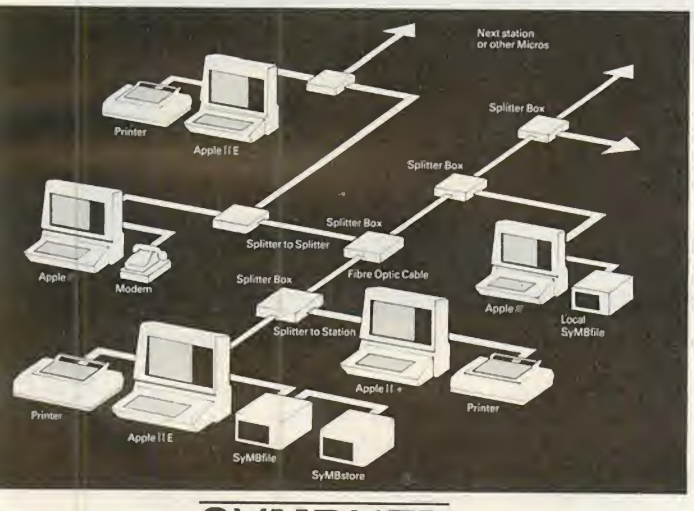

SYMBNET
LOCAL AREA NETWORK

MBNET is a "tree and branch" network system using fibre optic cable allow several microcomputers to share a common SYMBFILE. MBNET is the fastest long range local area network for rocomputers, and can cover a range of 7-9 Kilometres. Fibre optics ns that SYMBNET is more cost effective; it uses a high intensity semi-ductor laser to transmit data and cables can be laid along the shortest e, whereas other networking systems use flat ribbon or coaxial cable ch are sensitive to electrical noise from fluorescent lights, tocopiers, etc. SYMBNET is compatible with DOS, Pascal, SOS, and M running on any microcomputer supported by the SYMBFILE in current operation.

SYMBPLEXER
NETWORK CONTROLLER

The SYMBPLEXER is a network controller which complements SYMBNET. The SYMBPLEXER is connected directly to the SYMBFILE and performs all read-write operations to and from the hard disk. SYMBPLEXER does away with the need for a central machine thus releasing another terminal to run any application you wish, being a dedicated device the read-write operations are performed very efficiently, the support software allows SYMBPLEXER to designate pass codes for each user and to decide which user may access which applications. If you are currently using SYMBNET , accessing your SYMBFILE via a central machine, the addition of a SYMBPLEXER will in no way change the operational capabilities of the network.

For more details of all SYMBIOTIC products contact

SYMBIOTIC
COMPUTER SYSTEMS LIMITED

Duroma House, 32, Elmwood Road, Croydon, Surrey CR9 2TX ☎ 01 683 1137 PBX Telex 893815

Inside the Advance

An IBM look-alike for the price of a BBC — sounds too good to be true. Ian Stobie went along to check it out.

There is no separate Model B, an expansion unit converts the Model A into a Model B.

Exclusive

A 16-BIT machine built around the advanced 8086 processor with 128K of RAM and a modern business standard keyboard, for £350 — less than the cost of a BBC Model B. An IBM compatible disc-based system with twin drives with WordStar, Mailmerge and CalcStar thrown in, for £1,200. These two systems from the North London-based company Advance Technology U.K. certainly have remarkable specifications for their price.

Both models, the Advance 86 Model A and the Advance 86 Model B, are scheduled to be launched in September. I had a look at pre-production versions and talked to some of the people behind the systems. What I actually saw was the electronics of the systems without production casing, and pre-production mock-ups of the casing the systems will be delivered in. Advance say September is when it hopes to be actually delivering systems to computer shops.

Externally the Advance looks like a modern business computer. The Model A comes in two units, a system box and a separate detached keyboard on the end of a cable. The Model B comes in a third box containing two disc drives and other goodies. This clips on top of the Model A system unit. So really there is no separate Model B, but rather an expansion unit which converts the Model A into a Model B. Model A users can convert to the disc-based system for £852.

The reason there are two models is to enable the Advance to address two distinct market slots. The model A is aimed at the kind of people who are buying the Commodore 64 and BBC computers.

The disc-based Model B is aimed at the same kind of people as the IBM PC itself, or people who are buying IBM look-alikes, or even eight-bit business systems like the Osborne which have some application software thrown in.

The Advance keyboard would certainly impress most home micro users. It is deliberately very like the IBM PC in layout, but to my mind there are certain improvements. The left Shift key has been moved to a more normal location next to the Z key, the Return key enlarged, the numeric keypad moved slightly to the right to separate it from the main keyboard.

The system box contains the main board with its 8086 processor and 128K of RAM. The box is large and flat and, in the mock up at least, is chocolate coloured. Looking at the electronics which goes in it, it could have been much smaller, but since the idea is to have the Model B expansion unit sit on top it makes sense to have both boxes the same size. When not in use the keyboard can be stored away inside the system unit, so the Advance will not take up too much space on a desktop.

Even the entry level Advance Model A at £347.82, comes with 128K of RAM and this can be expanded on board to 256K. By home micro standards this is enormous. A further 16K of RAM is set aside for the display. The system can put out 25 lines of text in either 40- or 80-column widths, or do high-resolution grahics in up to 16 colours. No display device comes with the system but three different outputs are provided, for domestic TV, RGB monitor or composite synch. monitor. A cassette port is provided so programs and data can be stored using an ordinary domestic cassette recorder. The system comes with a joystick port and a Centronics-type parallel-printer port fitted as standard. The printer port in particular is worth having as connecting a printer to systems like the Commodore 64 or Atari can involve appreciable extra cost.

The Model A will run cassette-based commercial software; Advance say they will be marketing a range of titles. In the United States though not in Europe an entry level cassette-based version of the IBM PC has been available, so there is some American software which should run on the 86 Model A. Advance say that with 128K of memory available it is possible for software suppliers to easily adapt many disc-based packages for distribution on tape; this obviously applies to programs which do not make disc accesses when running but are simply quite large.

The Advance's third unit, the Model B expansion unit, clips on top of the main unit. It is quite simple to fix and no external cables are involved. Once clipped together the two boxes are meant to be treated as one. The expansion unit contains another circuit board and two Shugart 5.25in. floppy drives, providing 640K of disc storage. The Advance's 8086 processor is capable of directly addressing 1Mbyte of memory, and with the Model B expansion unit RAM memory can be expanded up to 768K.

The Advance 86 Model B comes with the MS-DOS operating system, Microsoft GW Basic, an assembler, and three popular Micropro packages — WordStar, Mailmerge, and the CalcStar spreadsheet program. WordStar is the new version 3

ELECTRONIC MAIL IN MICROSECONDS

You could also link up with other Commodore 64s: in branch offices, for example, or in colleagues' homes, with instant exchange of information.

You could also plug in to half a million pages of Prestel information, making use of key figures in combination with your own calculations for such statistics as you might need; or for other business uses, like car hire and hotel bookings.

The Commodore 64 means maximum flexibility,

nome office.

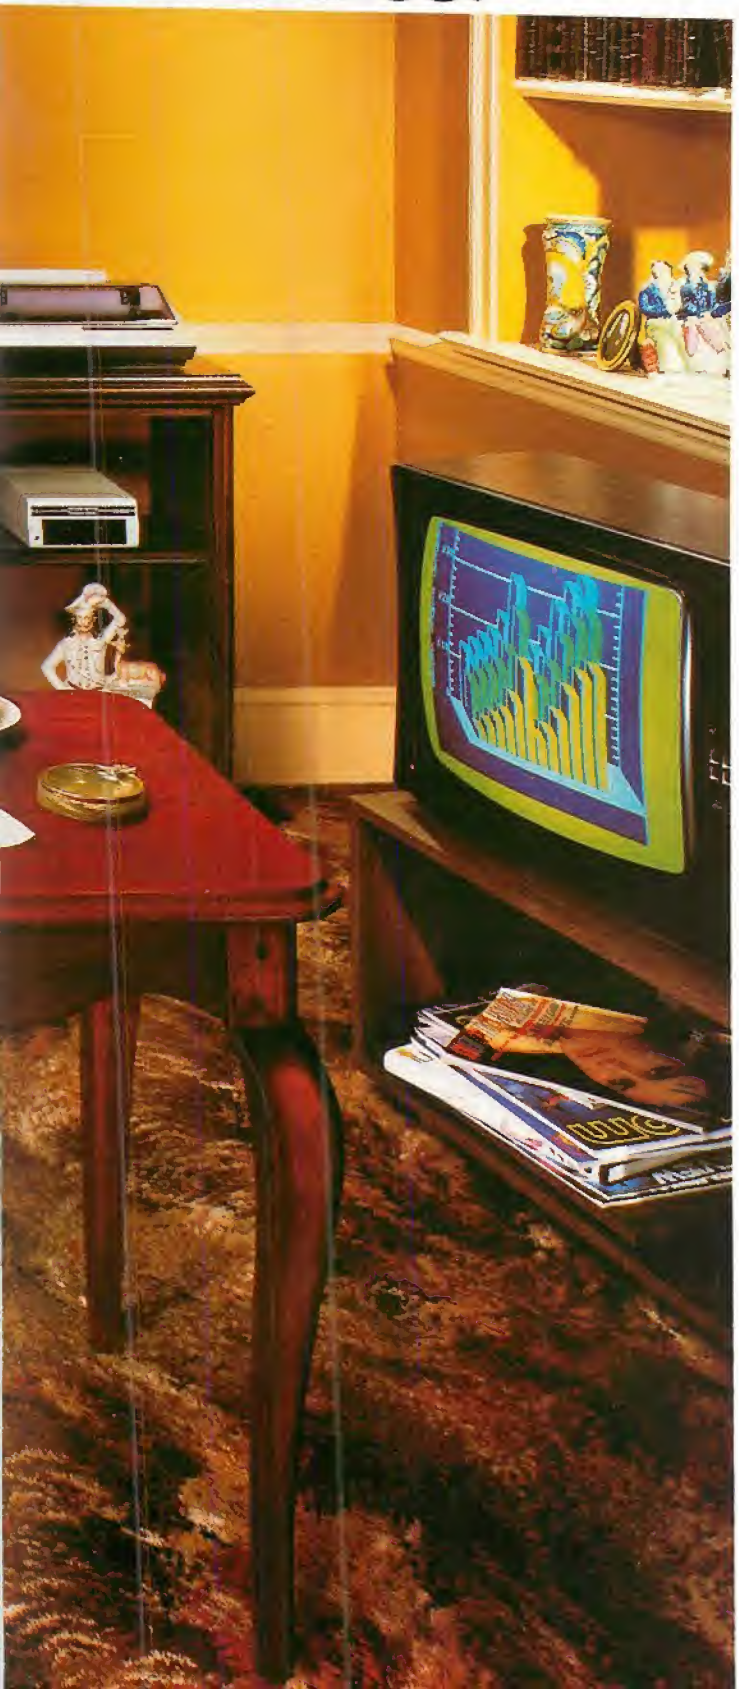

and provides the facts on which you can base sound business decisions.

INVALUABLE TO ANY BUSINESS

The Commodore 64 is the perfect computer for your own business, whatever its size. As well as the advantages we've already mentioned, it has a great capacity for expansion, and when combined with various peripherals** it is superbly flexible. Whether it's looking after personnel records or creating models, say, for sales forecasts, it will quickly prove to be of vital importance to any well run concern.

MORE POWER TO THE STUDENTS

A Commodore 64 in education puts more computer power at students' disposal. Subjects include maths, from basic arithmetic to higher functions; vocabulary building; elementary science; basic geography; and of course, learning computing.

FOR EVERYONE WHO HAS A HOBBY

Apart from being an absorbing and fascinating pastime in itself, the Commodore 64 can be a tremendous help in countless hobbies. It's equally happy collating recipes for a cook or choosing moves for a chess enthusiast.

In short, the Commodore 64 is one of the most outstanding microcomputers ever built. Outperforming all other computers in its class (some at twice the price), it's the ideal business partner.
And just as at home, at home.

The 64 from Commodore.

64K memory for £299*. Of its kind, unbeatable. At its price, almost unbelievable.

commodore
Changing business for the better.

For more information on the powerful new Commodore 64, and the address of your nearest dealer, telephone or write to us at: The Commodore Information Centre, 675 Ajax Avenue, Slough, Berkshire, SL1 4BG. Telephone: Slough (0753) 79292.

☐ Business Enquiry ☐ Personal Enquiry

NAME (MR/MRS/MISS)

POSITION

COMPANY

ADDRESS

POSTCODE TEL

65 MYB 0483

*EXC VAT - DETAILS CORRECT AT TIME OF GOING TO PRESS
**THOSE ILLUSTRATED HERE ARE THE DISK DRIVE AND DOT MATRIX PRINTER. OTHERS INCLUDE A CASSETTE DRIVE, JOYSTICKS, PADDLES, PRINTER PLOTTER AND MUCH MORE
N.B. MACHINE AND SOFTWARE SUBJECT TO AVAILABILITY

TRIUMPH ADLER makes it all refreshingly simple

with the arrival of the 8/16 bit Alphatronic micro

The Alphatronic P3 micro: the latest, most powerful addition to the outstandingly successful Alphatronic family. An addition that makes Alphatronic the largest range of 'ready to use' micros on the market, priced from £1,895 to £2,345.

The dual purpose 8/16 bit processor means you can make use of the wealth of proven 8 bit software now. As 16 bit software becomes more widely available, we can upgrade your P3 to 16 bit operation.

The P3 is a micro version of a larger system - rather than a 'blown-up' hobby computer. It's a high quality, engineered computer, designed to cope easily in the business environment.

Triumph Adler is a world leader in business products and committed to simplifying business procedures and reducing business costs. We provide a helping hand to our customers and our dealers. With over 80 years' experience in the business market our single source philosophy is second to none. We actually do what everyone else claims. We test software, educate your staff, supply high quality stationery and supplies and ensure your system runs smoothly.

In short, we at Triumph Adler are dedicated to making your life refreshingly simple and to providing successful computing for your future.

To get the full story, simply clip your letterhead or business card to the coupon, or ring the Triumph Adler hotline on 01-250 1717 and ask for department MMD.

TA TRIUMPH ADLER

Computing for your future

Triumph Adler (U.K.) Limited, 27 Goswell Road, London, EC1M 7AJ. Tel. 01-250 1717 A member of the Volkswagen Group.

Please tell me in simple terms the benefits I can expect from the most extensive range of business micros. • Circle No. 153

Name _____ Company _____

Address _____ Telephone _____

CP/M's past

For all its popularity, CP/M could hardly be described as elegant. John and Timothy Lee look at what makes it so annoying to use, and find out how many of its faults have been eliminated in the new version, CP/M Plus.

MICROS have now been with us for a decade, during which the CP/M operating system has become the *de facto* standard operating system for eight-bit micros. It was originally written by Gary Kildall, a consultant to Intel, for use on his own Intel development system.

CP/M — the name is said to stand for Control Program for Microcomputers — was then developed and marketed by Digital Research for the Intel 8080 processor, and subsequently for the Zilog Z-80 and Intel 8085-based machines. By 1975 a growing number of microcomputer manufacturers had adapted CP/M to run on their hardware, and a large base of users began to form.

One important feature which made CP/M catch on was the provision of the program ASM. It provided the ability to write machine-code programs using mnemonics, rather than having to hand-code them in hexadecimal. Furthermore, such programs would run on any CP/M machine, making it possible for people to write programs like Microsoft Basic.

With the large CP/M market, programs could be sold at ridiculously low prices compared with the price of software for mainframes. In the early days a revolutionary word-processing program called The Electric Pencil held a position of dominance, though in recent years this spot has been taken by WordStar.

The availability of CP/M and its dependent software led to the widespread use of the Intel 8080 and Zilog Z-80 central processors. The superior speed of the Z-80, which runs at up to 4MHz, together with its much larger instruction set, made it more popular than the original 8080 which can only manage 2MHz. Z-80s are now available running at 6MHz, and even 8MHz. The Intel 8085 which is a code-compatible enhanced version of the 8080 runs at 5MHz and faster. Zilog's forthcoming Z800, a code-compatible enhanced version of the Z-80, will run at up to 25MHz — see Ray Coles' article in the August *Practical Computing*.

The battle for dominance of the 16-bit microcomputer market is still on. CP/M-86 and MS-DOS are strong contenders for computers based on the Intel 8088 and 8086, CPUs while several variations of Unix and CP/M-68 are in contention for the Motorola 68000-based machines. Concurrent CP/M, with time sharing of the CPU between two or more tasks, may prove valuable where the CPU is sufficiently fast and powerful. In this article, CP/M without qualification will refer to the 8080 version of CP/M, release 2.2, now sometimes called CP/M-80. The new CP/M operating system CP/M Plus is the long-awaited CP/M-3.

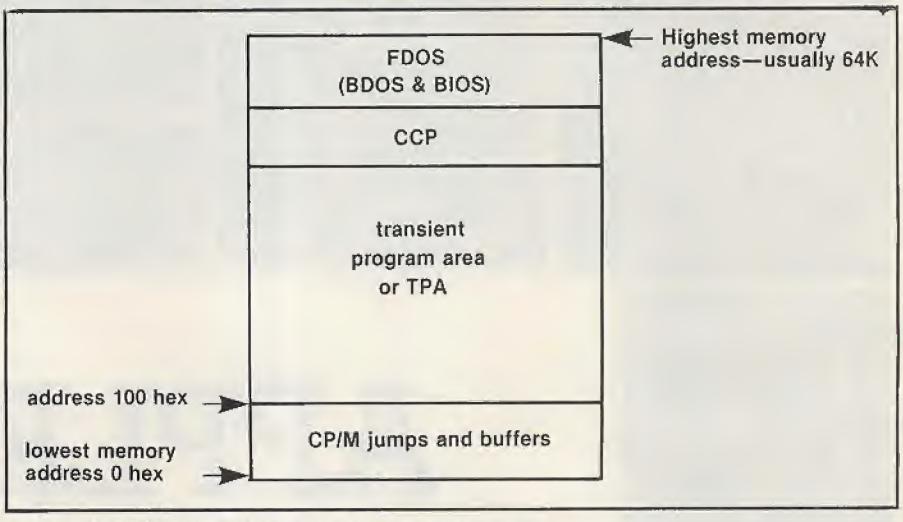

Figure 1. CP/M 2.2 architecture and memory map.

CP/M does not allow transient programs like Microsoft Basic or WordStar to access more than 64K of memory. At the time CP/M was originally written, this limit appeared astronomically large and unimportant. Now it is the common size. In fact you cannot even get 64K of usable memory since CP/M itself occupies about 7K, leaving only 57K if you are lucky. If your computer has a memory-mapped disc board, or a memory-mapped video board, then even less memory will available be for your program.

Because CP/M is unable to handle more than 64K of memory, there is not enough memory for CP/M to buffer previously used disc sectors. If such buffering were available, sections of data on the disc that are frequently used would be held in buffer memory and would give almost instantaneous program loading. Programs that make extensive use of overlays — WordStar is one — or those word-processors and data-base programs that manipulate large files would run much faster. Some manufacturers have simulated a disc drive using RAM to get round this deficiency. Such devices are variously known as RAM discs, virtual discs, silicon discs or semidiscs, examples being Warpdrive, Semidisk, M-Drive, RAM Disk and Interstellar Drive.

CP/M Plus can be configured in two different ways. The simplest form uses up to 64K of memory, like previous releases of CP/M, and it is called non-banked. However, CP/M Plus also supports multiple banks of memory and this version is called banked.

Configured in banked mode, CP/M puts the TPA user memory in bank 1 and moves most of CP/M to bank 0. Only the top 4K of the users bank of 64K is needed by CP/M, and this 4K must not be bank-switching — that is, the top 4K must appear in all banks. This leaves a larger TPA of 60K. In the banked version, the CCP is kept permanently in memory in bank 0, so it takes practically no time to return to CP/M command level.

To display the names of the files present on the logged-in disc CP/M uses the Dir intrinsic command. This is fine, but the command is slow. Dir works by reading through the file-directory space as stored on disc, starting at the beginning and continuing entry by entry until the end. Each time a non-deleted file is found, the name of the file is printed.

Equally important, each time a program opens a file, or looks for a file, or a new file extent — that is a new 16K section of a disc file — CP/M has to search sequentially through all of the

and present

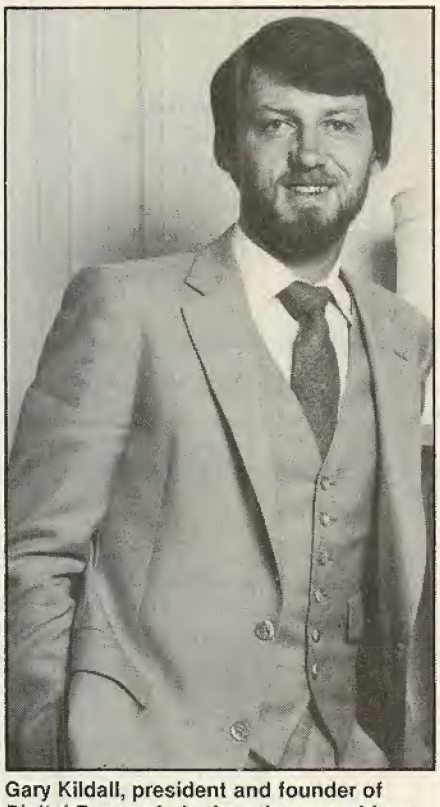

Gary Kildall, president and founder of Digital Research, is the primary architect of CPM.

directory entries to determine whether the file exists. This is painfully slow and is simply not necessary. Techniques like hashing the directory would reduce the number of disc accesses needed to find a file.

Directory handling has been improved considerably in CP/M Plus as directories are now hashed. When CP/M Plus is asked to create a file, an algorithm calculates into which entry of the directory the file should go. If this entry is empty, the file name is put there, otherwise the algorithm produces another entry to try, and so on until an empty entry is found. If an empty entry cannot be found, then the directory is full.

When CP/M Plus accesses a file, it calculates in which entry in the directory the file name is likely to be, and looks there. The file name will usually be there, but if another file name is found, CP/M Plus tries the next entry where the file name might have been put, etc. If CP/M Plus finds an empty entry before the file name is found then the file does not exist. Thus CP/M Plus usually only looks at one or two entries in the directory to find a file and does not search linearly through all the directory entries as CP/M 2.2 did. This results in files being searched for, opened or created much faster. Since files have a directory entry for every 16K of data, this results generally in faster disc access times.

There is little provision for redirection of output. If your CP/M has the IObyte implemented, then you can use Stat to change the console device to any one of three physical devices. But on many copies of CP/M the IObyte is not implemented. You may want to run a program and redirect the output which would normally go to the screen to a disc file, or to a printer. CP/M allows the user to type Control-P for all messages which are sent to the console to be copied to the printer. Unfortunately this does not work when running some proprietary programs like Microsoft Basic.

CP/M does not allow you to send console output to a disc file instead of a terminal. It is only possible to copy output to the printer, and it is not possible to copy console output to a disc file, so it is not possible to create a file containing a sample run of a program.

Similarly CP/M provides only poor facilities for redirection of input. The transient command Submit allows CP/M commands to be read from a file rather than from the keyboard, and Xsub allows command lines to be passed to applications programs. However, these commands only support the passing of command lines. They do not allow single characters to be read from a file rather than typing them from the keyboard. Thus any program that has character commands rather than command lines which have Return at the end of the lines — WordStar for example — cannot be driven using the facilities provided. It should be possible to read input data from a disc file instead of typing it from the keyboard, and redirection facilities of this type exist on all mainframes.

True redirection of input and output is now available on CP/M Plus using the new transient commands Get and Put. Input can now be taken from, or output sent to disc files.

Input from the keyboard is not buffered by CP/M. During a slow disc operation the CPU is not listening to the keyboard, and anything you type during this period will be lost. A good operating system should check periodically to see whether characters have been typed on the keyboard, and store them in a buffer until the program that is running asks for input data. This form of keyboard buffering would prevent characters being lost when disc access occurs on a word processor.

Early versions of CP/M were designed exclusively for 8in. IBM single-density format discs. The basic units of the IBM format were the track and the sector. Discs had 77 tracks and each track had 26 sectors. Each sector contained 128 bytes of data. CP/M was, and still is, organised around sectors. Files are read or written in 128-byte sectors.

Most disc boards now read or write more than 128 bytes at a time. For example, IBM double-density puts 256 bytes in each sector, and North Star double density puts 512 bytes in each sector. Meanwhile CP/M still works by reading or writing 128-byte chunks of data that CP/M still calls sectors. Thus one, two or four CP/M sectors equal one disc sector. CP/M would run more efficiently if it could be set to work in the appropriate multiples of 128 bytes.

The way CP/M reads discs is wasteful. When a request is made to read a sector from disc, CP/M moves the disc head to the correct track and watches the data passing under it until the required sector is seen. The data is then read into memory. The next file to be read will probably be for the next sector, and it is likely that this sector will be on the same track as the previous sector.

CP/M would run faster if it read and buffered the whole track as soon as the track is first used. Subsequent accesses for this track would then read the data from buffer memory rather than from the disc, and thus would be very quick indeed. Track buffering is not implemented in CP/M although some manufacturers have developed special versions of Bios that buffer a track, for example Turbodos by Software 2000 Inc.

In the banked configuration of CP/M Plus any spare space in bank 0 can be used by CP/M for disc buffering, as can up to another 14 banks of 60K. The total amount of disc buffering available is thus over 850K if sufficient memory is available. Both the banked and the non-banked versions allow a sector count to be set. CP/M always then communicates with the disc system in the multiples of sector-count CP/M sectors. Thus CP/M can be made to work in units of the disc system, or even in tracks.

One of CP/M's annoying and unnecessary features is the need to press control-C to log in a new disc each time you change discs. Cromemco found how to avoid doing this many years ago with its CDOS operating system. If you change

(continued on next page)

(continued from previous page)

discs and do not press control-C then the first time you try writing to the changed disc, CP/M will stop with a BDOS error.

Copying a whole disc is tedious and slow, using Pip to copy the files, and Sysgen to copy the operating system for the reserved tracks on the disc. It would be more convenient, and much quicker, to have a utility program to copy an entire disc track by track.

With CP/M Plus it is no longer necessary to type Control-C every time a disc is changed. If it tries to write on a disc CP/M Plus detects that the disc has changed and no longer gives BDOS error R/O. Instead it logs the new disc in and does the file write. This improvement should remove one major source of frustration of using CP/M.

CP/M Plus will also search all discs for a program before giving up with an error message. The order in which the discs are searched can be set by the user. Failing to shut the disc door is not fatal.

Even better, an application program can put CP/M Plus in a mode where CP/M Plus never reports an error, but sends a Return code back to the program, indicating that the desired function has not been achieved. Using this facility application programs can be rewritten to put an intelligent error message on the screen, stating the source of the problem and indicating what remedial action should be taken.

CP/M's console command processor, CCP, only looks on the currently logged-in disc for files. It would be more friendly if all discs were checked, starting with the logged-in disc. If the CCP cannot find the file on any disc then a message to this effect should be printed rather than just the file-name and a questionmark.

It is annoying if you type a command line with a spelling mistake and press Return. The CCP does not let you edit the erroneous line to take out the spelling mistake — the whold line has to be retyped instead.

There is a considerable delay when returning to the system from a transient program. For example, when you type System to get out of Microsoft Basic to return to CP/M, there is a considerable delay before the CP/M system prompt A> appears. This is because the transient program may overwrite the CCP, and on returning to CP/M the CCP must be read from disc, and reloaded into the appropriate part of memory — see figure 1.

The transient program ASM, which contributed much to the early success of CP/M, is now very dated. It still works perfectly well, but only accepts the 80 instructions in the 8080 instruction set, thus preventing use of the extra 80 commands in the Z-80 instruction set.

In CP/M Plus the old ASM program has been replaced by a macro assembler, which can also assemble Z-80 code. The 1Obyte redirection facilities have been

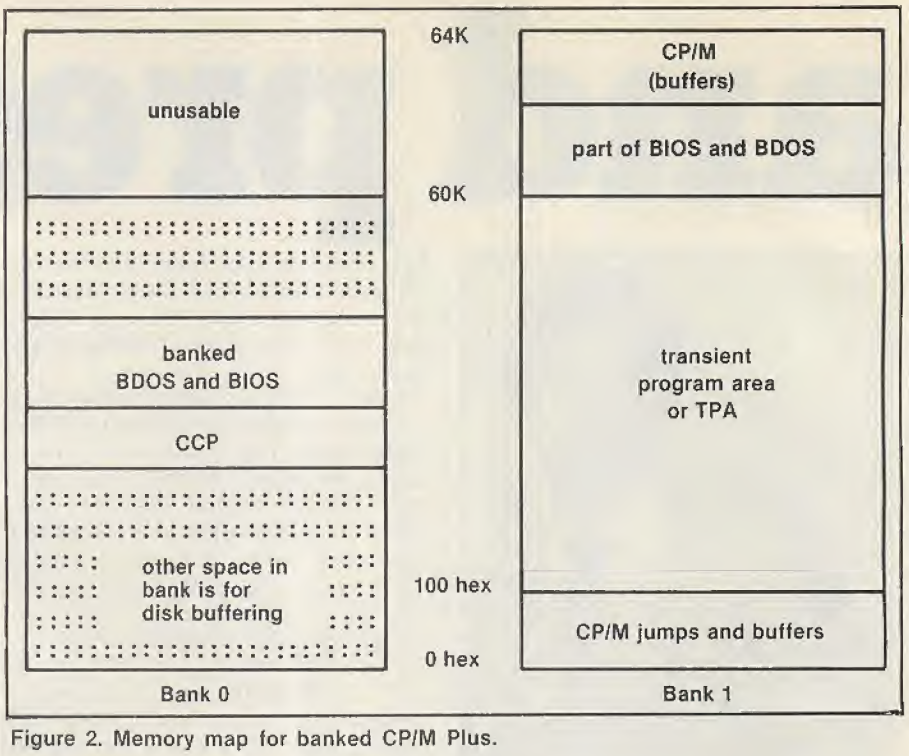

Figure 2. Memory map for banked CP/M Plus.

taken out of Stat and made into a new easy-to-use program. A Help system is also supplied for CP/M. The database used by the Help program can be customised using programs provided.

You can also add help on completely new topics, such as applications programs that you use, or instructions for backing up discs, etc. Pip now has the ability to archive files. Used this way, Pip copies all files that have not previously been archived, and also marks the file as archived. It makes the task of backing up of big hard discs onto floppies slightly more tolerable.

New machines will probably use CP/M Plus rather than CP/M 2.2, as the banked version provides far faster file handling. Installing CP/M Plus will be difficult: Digital Research does not plan to sell CP/M Plus to end-users but dealers will be able to configure and sell versions for their machines.

Those micros that can have lots of memory — for example, all S-100 machines — will benefit greatly from the change from CP/M 2.2 to CP/M Plus. On many micros the discs are the biggest bottleneck, and CP/M Plus dramatically improves disc throughput.

For those who cannot wait until a version of CP/M Plus is available for their machine, a dramatic improvement in computer performance can be achieved by buffering some of the disc in memory. It can be done from CP/M 2.2 with software that is in the public domain and published in *Lifelines* from Lifeboat Associates.

Alternatively you can purchase Warpdrive from Compupro, Semidisk from Semidisk Systems Inc., M-Drive/H from Compupro for S-100 systems, RAM disc for the Sage, or Pion's Interstellar Drive for a wide variety of machines, including S-100 systems, IBM, Tandy and Apple. They all provide the extra memory and the software to make it work, usually on a configuration disc.

Effectively these add-ons work by kidding the system into believing that a 256K or 512K memory board is really a disc drive. You can copy files from a floppy on to it and use them. If you alter the disc file, then you must copy the new file back on to a real floppy disc before switching off.

A cheaper and more subtle approach is to use extra memory as a cache, where only the frequently used disc files or parts of files are buffered. This works with quite a small amount of memory, from 4K upwards. Obviously more memory makes it work better. When the buffer is full, the least recently used part is the first to be discarded. There are two suppliers of this type of system, both British. Ghost is from Micrology, 4 Deanery Road, Godalming, Surrey GU7 2PQ, and Microcache, is supplied by Microcosm Research, 26 Danbury Street, London N1 8JU.

Cifer U.K. is a beta test site for CP/M Plus and is already selling machines with the new operating system. Sirton is also selling CP/M Plus in the U.K. Other dealers will probably follow shortly.

It seems likely that CP/M Plus will add extra life to the eight-bit micros based on the Z-80. At present the 16-bit machines offer the promise of much more power, but good 16-bit software is still lacking. Mark Twain said, "Rumours of my death are greatly exaggeratted" — and the same is true for the Z-80. In many applications CP/M Plus will increase the throughput, giving more delivered power.

If your microcomputers job involves managing information, you'll need a Compsoft Data Management System. It's your guarantee that computerisation will be a success.

Compsoft are world leaders when it comes to easy to use database programs. There is nothing quite so genuinely user friendly, and nothing quite as powerful. And Compsoft were the winners of the 1983 RITA (Recognition of Information Technology Achievement) Awards 'Software Product of the Year'.

We can give your *Computer the power to breeze through the management of any record keeping situation, – effortlessly, efficiently, and more accurately than you ever dreamed possible. From sales ledger to stock control, purchase ledger to personnel, clubs to customers, and in a thousand other ways, we can lend a helping hand.

You don't have to be a computer expert to use Compsoft's DMS or Delta. Both programs offer fast, accurate and elegant database power for both first time computer users and professional systems designers.

You owe it to yourself to know more. Either return the coupon to us, or simply telephone the office and we'll send you a complete guide to our versatile database programs – today.

* Delta is available for almost any microcomputer with the MSDOS, PCDOS, CP/M or MP/M operating systems, including IBM, DEC Rainbow, SIRIUS, XEROX, ICL, EPSON and many others.

DMS is also available for Commodore computers.

Compsoft Limited
Hallams Court
Shamley Green
Nr Guildford, Surrey
England GU4 8QZ
Telephone: Guildford (0483) 898545
Telex: 859210 CMPSFT

Please send me further details

Company _____

Contact _____

Address _____

_____

PC Tel No. _____

● Circle No. 155

Dragon games

Ian Stobie was not very impressed with the selection of games he tried for this machine.

Backgammon

BETWEEN THE casing of the cassette and the display on the computer screen Backgammon seems to change its name to Microdeal Pengammon, probably for some inscrutable copyright reason. All the same it is the traditional game of Backgammon.

The program allows the computer to play against you or against itself; alternatively you can use it instead of a board to play with another human, although I cannot see many people wanting to given the Dragon's typical — literally — scintillating display.

The screen displays red and yellow pieces on a green background. Moves are made by typing in the source and destination square numbers, although you can use Microdeal's light pen if you have one. You need to know the rules of Backgammon as neither the screen display nor the packaging help you, and you have no option but to play the doubling game. If the Dragon offers to double the stake and you refuse you have lost.

The game has nine levels of play. You can cheat by changing the machine's level of play during the game or you can get the machine to make your moves for you. The machine seemed to play quite well at its top level, but to be honest I did not find playing Backgammon against a machine sufficiently exciting to provide it with much of a challenge.

Specification

Supplier: Microdeal
Price: £8
Use of graphics: 6/20
Playability: 12/20
Overall rating: 9/20

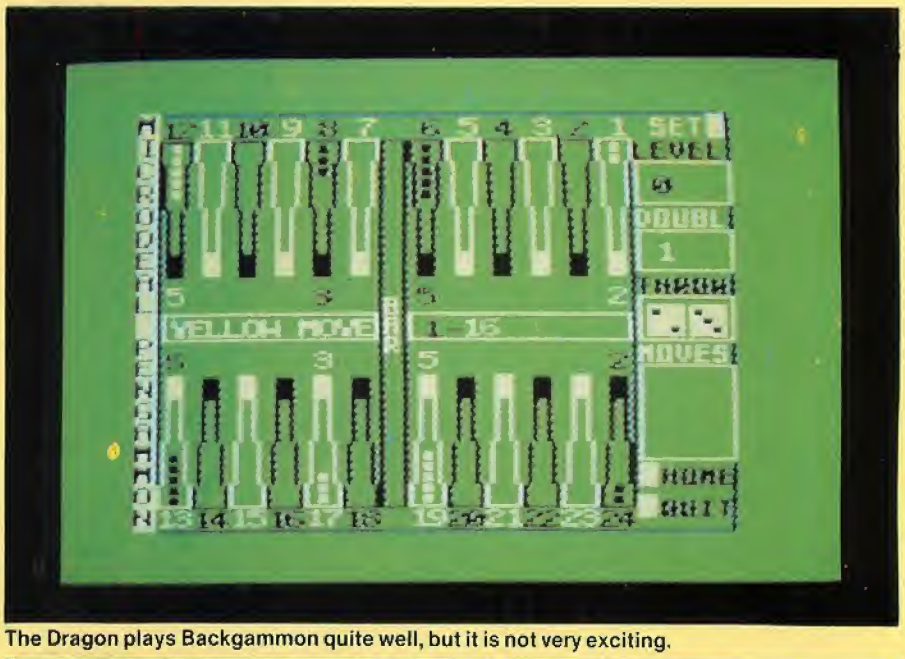

The Dragon plays Backgammon quite well, but it is not very exciting.

Cruising on Broadway

CRUISING on Broadway is one of the few games to make the transition across from the Spectrum to the Dragon, and is quite a playable game although it is very simple. It has no discernable connection with anything as realistic as Broadway, or for that matter with cruising.

You are a green blob and you are chased by a yellow blob through a simple maze. Success promotes you to higher and progressively more complex mazes until you are eventually eaten. However, your name will live on in the high scoring hall of fame if you can survive sufficiently long.

Cruising has simple graphics and sound effects to match, but it is quite compelling and exciting. In fact, the Sunshine logo which comes up as you load the game is one of the best examples I have seen of what can be done with Dragon graphics, although the screens you play on are far less elaborate.

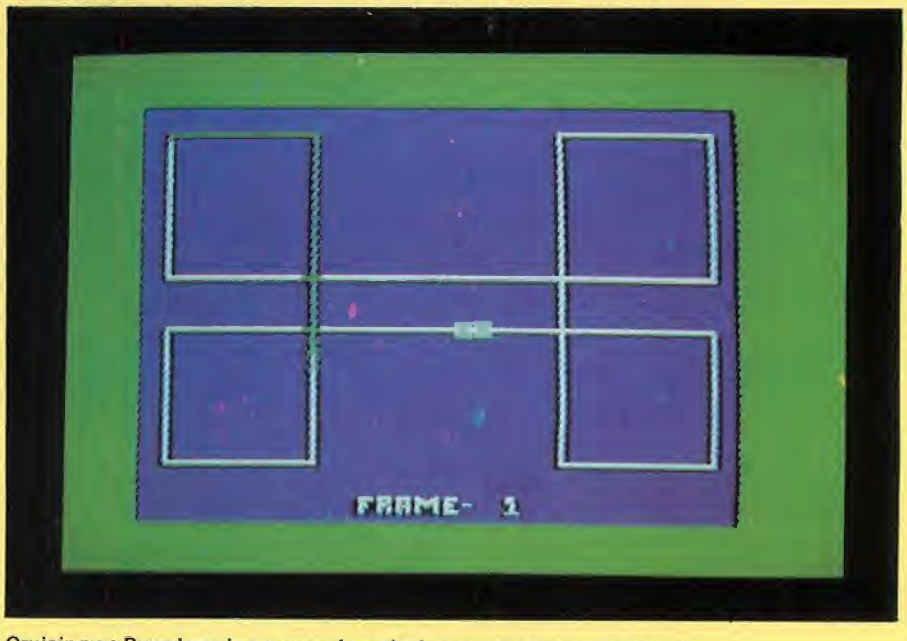

Cruising on Broadway is a game of survival, you can never actually win.

Given the generally poor standard of the 30 or so Dragon games I looked at Cruising must rank as one of the better games available for the machine.

Specification

Supplier: Sunshine
Price: £6.95
Use of graphics: 8/20
Playability: 12/20
Overall rating: 10/20

Gridrunner

SO MUCH goes on in this game it is difficult to describe. It is like a cross between Space Invaders and Centipedes. Your little orange ship is being chased by linked chains of droids across the high energy lattice, the grid. You draw power from the first seven rows of the grid, which you zoom around while firing at the droids. Meanwhile the deadly X/Y zappers try and get you from the side of the grid.

Gridrunner is a top selling game on the Vic-20 and Atari. The Microdeal Dragon version is credited to the same author, Jeff Minter, but it is not as good. It seems slower, the graphics are not as good, and generally it is less exciting.

Much of the problem can be attributed to a less effective use of sound; the game needs lots of noises to generate a sense of excitement. In this version you do not get a noise when you fire. Still, while not initially very compelling Gridrunner is a good game if you persevere.

Specification

Supplier: Salamander
Price: £7.95
Use of graphics: 6/20
Playability: 13/20
Overall rating: 10/20

Dragon Trek

THERE ARE several versions of the classic computer game, Star Trek, available for the Dragon and Dragon Trek from Salamander was the best of the three I looked at. It goes beyond the typical text mode display and has reasonable graphics. The game takes place in real time so you cannot take too long over your decisions.

You start by setting the difficulty level, 0-9, and length of game. Your task is to take command of the USS Enterprise and patrol the galaxy, eliminating deadly Klingoms to save the Federation. Your ship, armed with three types of phasor and with photon torpedos, is protected by shields. The problem is to correctly use your limited amount of energy. This is used up at an alarming rate whenever your shields are hit by a Klingon, when you fire back, or when you warp or use your impulse jets to move.

This is quite an enjoyable game, but it is still not a patch on the best, truly real-time versions of Star Trek for other machines, for instance, Star Raiders on the Atari.

Galactic Ambushic is an arcade game.


Gridrunner is not as good as on the Dragon.

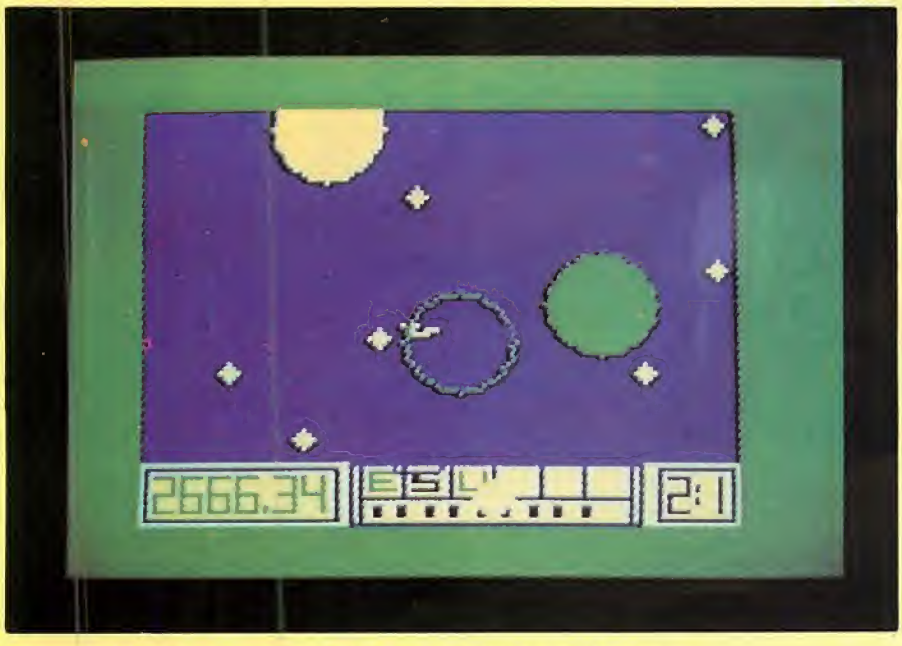

Dragon Trek is just one version of Star Trek available for the Dragon.

Specification

Supplier: Salamander
Price: £9.95
Use of graphics: 9/20
Playability: 13/20
Overall rating: 11/20

Galactic Ambush

GALACTIC AMBUSH is a Galaxians-type arcade game. Aliens steadily advance from the top of the screen, occasionally leaving formation to come at you with missiles blazing. You shoot back.

Visually the game is quite good by Dragon standards — the best thing is the three-dimensional moving star field against which the action takes place. But even at the fast speed the game is rather too easy to play. I doubt if it will provide much of a challenge to the average mad gamester for very long.

Specification

Supplier: Microdeal
Price: £8
Use of graphics: 12/20
Playability: 6/20
Overall rating: 9/20

Wormtube

WORMTUBE IS a kind of crude Defender, but it is quite enjoyable. You fly your ship through a steadily narrowing tube, scoring more points the futher you get along it. Gold nuggets appear in your path, which you have to avoid or shoot apart. You get extra points for gobbling up the fragments of shot-up nuggets.

Up to four people can play Wormtube taking turns with one joystick. The graphics are quite simple but adequate, and the game is made more exciting by the noises which rise in tone as your score increases. This game reminds you that it is not always the most complicated effects that work best. One of the best things about the original arcade Space Invaders, for instance, was the steady insistent noise the ever-more determined invaders made as they came at you.

Specification

Supplier: Hornet
Price: £8
Use of graphics 6/20
Playability: 13/20
Overall rating: 10/20

Call your nearest Bonus Pack stockist today:

BIRMINGHAM
Media Resources – 021-643 9940
CAMBRIDGE
Jeffrey Sin-Jon & Associates Ltd
(Cambridge) – 0223-321000/321333
CLEVELAND
E.W. Harrison & Partners (Hartlepool) – 0429-79814/5
HAMPSHIRE
Plum Business Services Ltd (Portsmouth) – 0705-736626
HERTFORDSHIRE
Churchill Computer Supplies Ltd (Bushey) – 01-950 9510
Dataprint Paper Supplies Ltd (Letchworth) – 04626-78394
HUMBERSIDE
Contrac (UK) Marketing (Hull) – 0482-571741
IRELAND
Cantec – Dublin 694455
KENT
Salmons Computer & Office Supplies
(Northfleet) – 0474-57261/23475
LANCASHIRE
Pegasus Computer & Business Supplies
(Nelson) – 0282-68191
LEICESTERSHIRE
Elmhurst Computer Services Ltd
(Oakham) – 0572-57423/55329
LONDON POSTAL DISTRICTS
D.W. (Direct Wholesale) Ltd (NW9) – 01-205 3476
Scopus UK Ltd (EC2) – 01-739 3344
VBK Computer Supplies Ltd (E4) – 01-524 6303/4/5
K & J Wespac Ltd (E1) – 01-729 1170
MANCHESTER
G.C.S. Computer Services – 061-339 0400
MIDDLESEX (North)
Kendal Computer Group (Enfield) – 01-366 1411
MIDDLESEX (West)
DI-MOS Ltd (Hillingdon) – 01-561 6460
Libra Business Supplies Ltd (Northwood) – 09274-28598
PAS Computer Products Ltd (Staines) – 0784-62781
Warwick Fraser (Feltham) – 01-844 2144
NORFOLK
Boardmead (East Anglia) Ltd (Norwich) – 0603-483659
SCOTLAND
Aberdeen Computer Services Ltd
(Aberdeen) – 0224-875867
Datamart – (Edinburgh) – 031-441 6961
SOMERSET
Guildhall Computer Stationery Ltd
(Glastonbury) – 0458-34122
STAFFORD
Associated Computer Supplies Ltd (Stoke) – 0782-287121
SURREY
Saracen Data Products Ltd (Dorking) – 0306-887550
Tarbot Computer Services Ltd (Sutton) – 01-642 0021
WBM Business Supplies Ltd (Woking) – 04862-66441
SUSSEX
Hayform Ltd (Horsham) – 0403-710838
SBS Data Services Ltd (Hove) – 0273-726331
Scan Computer Supplies Ltd (Burgess Hill) – 04446-45211
WILTSHIRE
Stralfors Data Products Ltd (Swindon) – 0793-37837
YORKSHIRE
Diskatech Ltd (Sheffield) – 0246-410377
Nevetsco Ltd (Sheffield) – 0742-452051
Spectrum Computer Supplies (Bradford) – 0274-308188

TWINLOCK
Bonus packs are also available from your local TWINLOCK dealer.
Details of your nearest dealer are available from:–
Twinlock (London and South) – 01-658 5931
Twinlock (Midlands and North) – 021-565 2906
Twinlock (Scotland) – 041-445 4421

CONTROL DATA

Practical Computing big game hunt

WHAT'S YOUR FAVOURITE computer game, and why? What kind of game is it? What's your best score? How does the game rate against Scrabble on the Apple, The Hobbit on the Spectrum or Star Raiders on the Atari? Consult the ratings published in our regular games reviews for comparison.

Then fill in the software survey form below and let us know. The results will be collated for a special guide to computer games in our December issue, including a Top 30 as selected by readers of *Practical Computing*.

You can fill in a survey form for more than one game. Simply photostat the one below.

Game:.....
Publisher:.....
Machine:.....
RAM required:.....
Accessories required:.....
Price:.....for cassette/disc/ROM

* * *

Type of game:.....
.....Frogger, Scramble, Pacman type, etc.
Number of players:.....to.....
Object of game:.....
.....
Use of colour/sound:.....
.....
Comments:.....
.....
.....
Your highest score:.....
Rating out of 20:.....

* * *

Name:.....
Address:..... } Optional
..... }
..... }

Post completed forms to: BIG GAME HUNT, *Practical Computing*, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS to arrive by Friday September 30, 1983.

Oh, so easy WP

Jack Schofield found Atariwriter convenient, easy to use, and relatively cheap.

POWERFUL WORD PROCESSORS are no stranger to the Atari computers: Letter Perfect, Text Wizard and the Atari word processor have been out for three or four years. But the new ROM-based Atariwriter represents a breakthrough in terms of convenience and ease of use, especially for the 16K 400 owner who will be able to use it even with a disc system.

It is also, while virtually as powerful, cheaper than some of its rivals. It costs about a third less than the Atari WP and is half the price of the Letter Perfect ROM, though it is somewhat more expensive than the product it most resembles — Computer Concepts' Wordwise ROM for the BBC micro.

Atariwriter was developed by Atari partly from the Atari WP, in conjunction with Datasoft who produce Text Wizard. It has something in common with both parents, but is most like Text Wizard in its insert mode. Like Wordwise, Atariwriter operates permanently in insert mode so there is no overwriting. As you type text into the middle of a paragraph existing text is pushed down the screen a word at a time. This creates some odd effects at line endings but is eminently practical.

As with all Atari's main-line programs the documentation and packaging are outstanding. Atariwriter comes with a slim manual which includes tutorial and reference sections, plus a handy quick-reference card. Interestingly the documentation is better than the massive volume and tape provided with the Atari word processor.

To run you just plug it in. The program has two main screens with legible white text on a darkish blue background, darker than the usual Atari screen. First is the menu screen with eight options: Create, Delete, Edit file, Format disc, Index of disc files, Load, Print and Save file. Options are selected by typing the first letter of each word which is shown in inverse type.

The second screen provides a 21-line by 36-character space for text entry, which is less than the Atari's standard 40-by-24 format. The top line initially contains the default parameters for printing. These can be changed or added to later.

Anyone can use the program without knowing anything about word processing, just by typing C and then entering text. The more sophisticated user will learn to use the other functions like block moves and Search and Replace. These are invoked using combinations with Control, Ctrl, and the Atari's three programmable function keys marked Option, Select and Start.

The initial menu screen is self explanatory and provides some access to Atari DOS functions. Index rapidly alphabetises the list of files, and its scrolling is stopped and started with the space bar. Any function which destroys text or files requires an "Are you sure — Y/N", confirmation. You can always get back to the menu screen by pressing Esc for Escape.

The text-entry screen provides a

Atariwriters main menu.

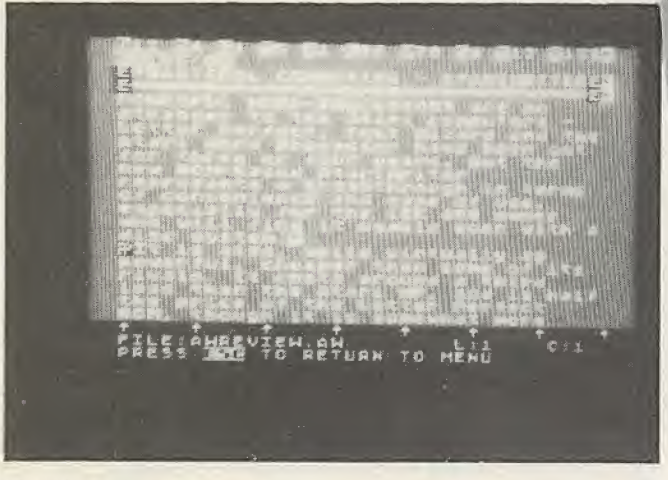

Typical Atariwriter screen.

The manual includes tutorial and reference sections.

reasonable range of cursor movements for editing. The basics are handled by the standard Atari full-screen editor with four direction keys, which with Ctrl move you one step at a time in any direction. There is full scrolling up and down, though up-scrolling is a bit jerky. You can go up or down one screenful at a time by Option ↑ and Option ↓.

Four other movements are exactly the same as in Text Wizard. Ctrl A moves the cursor to the start of the line, and Ctrl Z moves it to the end. Select T takes it to the top of the text, Select B to the bottom. There are no word, sentence or paragraph movements.

Deletions are equally simple, by character and by line, using the Delete Back Space key, DBS for short. Select DBS deletes to the end of the file. A 30-line buffer holds the last thing you deleted, so it can be recovered by pressing Start Insert.

The buffer also provides for block moves and block duplication. Each block has to be defined by marking its start and end with a Ctrl X. Again, block deletes require a Y answer to an "Are you sure?" Search and Replace can be individual on the same Y/N basis, or global. The maximum length of a search string is 25 characters — more than generous.

It is always possible to find out how much space remains for text by pressing option F. At this point using a 48K Atari 800, for example, 12,941 bytes — or characters — remain free, so this report will consist of a single continuous file. Atariwriter warns you when there are only 1,500 bytes left. The Atari WP has no limit but you must produce text as a series of saved pages. The memory limits of Letter Perfect and Text Wizard are 36,714 and 30,505 bytes respectively, compared with Atariwriter's initial 26,332 without DOS.

Texts can be merged so it is possible to, say, load a text from disc into the middle of an existing file. Also print files can be Chained, a way of handling long articles.

After the text has been entered the next step is formatting for printing. Here Atariwriter is at its weakest because it is limited by the Atari's 40-column screen. One option would be to scroll the screen horizontally to provide a sort of 80-column screen, which is what the Atari word processor does, just like WordStar on the Osborne and Magic Wand on the Apple II. There are 80-column boards for the Atari, which Atariwriter does not mention. Software can also provide 80 columns, though of course the text would not be legible on a TV set.

What Atariwriter does instead is provide a print preview facility, Option P, where the text is set out as it will be printed and the screen forms a window which can be scrolled over it. Thus it is possible to check line and page endings and margins, though it is not very convenient. Many would prefer the Atari word processor preview option also adopted by Wordwise on the BBC, where the text is displayed as it will be printed even though it is illegible.

It does not show how expanded or condensed text will be printed, nor proportional spacing if the printer is capable of it. Also although Atariwriter will print double columns, these are previewed one under the other not side by side.

Being limited to a 36-character screen width for text entry only becomes a real problem when trying to set out tables using the Tab key. If the table is for condensed printing across the maximum 132-character width you really have to construct the table on paper, then type it in afterwards.

The print parameters can be set in half-lines for the bottom margin, top margin, paragraph spacing, line spacing and page length. Widths can be set in characters for left and right margins for two columns, and for paragraph indent. Justification can be on or off. All of these can be varied within a file. Lines can be ranged left, right, or centred. Ctrl 0 allows decimal codes to be sent to non-Atari printers, such as the Epson MX-80 used to print this text. Headers and footers can be handled simply with @ providing page numbers. Ctrl E can be used to force the start of a new page.

The package is on disc and cassette.

The final printing out is simply a matter of selecting a printer from the list of four Atari models — select number 3 for a non-Atari printer, and following the screen instructions. You can start and stop at any page and print multiple copies.

There is no Mailmerge capability, as there is with Letter Perfect in conjunction with Data Perfect, but there is a forms capability. If you put an Option Insert character in the text the printer stops at it and waits for an entry — up to 35 characters — from the keyboard. The catch is that the text is not displayed on the screen during printing, and the rest of the line to be filled is probably in the printer buffer. The system is usable if you are careful.

There are a few other facilities missing from Atariwriter — and all the other Atari word processors mentioned. None let you interrupt and resume printing — Atariwriter allows a pause at the end of a page. None will print one file while editing another, or display a second file. None does automatic file back-up. None allows the use of macros to insert key phrases with a single key-stroke, or the use of wild cards in a Search and Replace operation. None provides for soft hyphenation to help with the even spacing of lines. While Atariwriter and its rivals have many qualities, they are not going to replace WordStar and its ilk for the serious writer, though of course it does not aim to.

	Atariwriter	Atari WP	Text Wizard	Letter Perfect
Menu driven	Yes, one	Yes, many	No	Yes
Text insert mode	Yes	No	Yes	No
Global search/replace	Yes	Yes	No	No
Horizontal scrolling	Only in preview	Yes	No	No
Print preview	Via window	Yes	No	No
Double-column printing	Yes	Yes	Yes	No
Prints half-lines	Yes	No	Yes	No
Can edit programs	Yes	No	Yes	No
Mail merge	No	No	Extra	Extra
Pause for text entry from keyboard	Yes	No	No	No
Disc interface	Atari	Atari	Atari	LJK
Medium	ROM	Disc	Disc	Disc or ROM
Producer	Atari/ Datasoft	Atari	Datasoft	LJK
Price	£65	£99.99	£68.95	£109.95, disc £149.95, ROM

This table is not a comprehensive comparison of products, but shows how Atariwriter combines most of the best features of its rivals.

Conclusions

● Atariwriter is a powerful word processor, well documented and extremely easy to use. It is easier to learn than Atari's Star Raider game, which is supplied on the same kind of ROM cartridge.

● It is suitable for most everyday writing tasks, and coped admirably with the writing of this article. It is not comparable in power to the best CP/M word processors, but provides word processing at a fraction of the price.

● It runs on any Atari micro and can happily be used with discs even on a 16K 400 system.

● At around £65 it is good value and can be recommended.

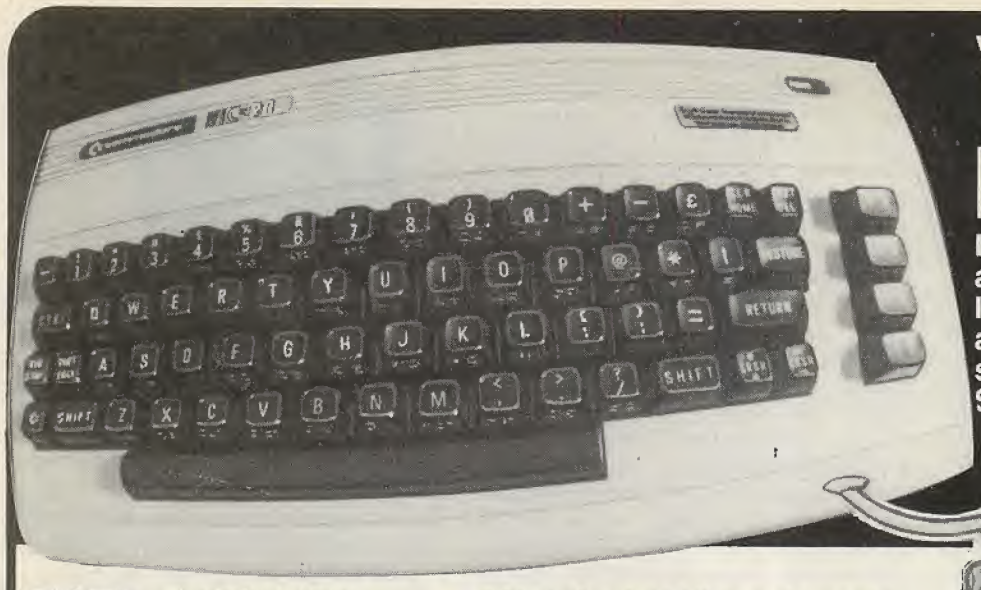

VIC 20 EXPANSION

Excellent design, inexpensive and just what a VIC 20 needs. Increases RAM and ROM and allows simultaneous use of such facilities as VICMON and SUPER EXPANDER.

DIGITAL ELECTRONICS

A must for today's technology. Introductory course written and designed by experts for both beginners and students. Practical projects and theory for a thorough background in this essential subject.

Series begins this month and is ideal for 'O' and 'A' level students and all Hobbyists. Recommended by the BBC for further reading.

PHOTOGRAPHIC RESEARCH

Electronics control the art of photography—find out more from our investigation.

Keep ahead with

PRACTICAL

ELECTRONICS

ON SALE EARLY SEPTEMBER

ATTENTION ALL apple USERS!

MEGAFILE

At last the Hard Disk Sub System at Floppy prices!

If a 140K floppy limits your capacity and hard disk prices are a bit tough then you have been looking for **MEGAFILE.**

Original hard disk systems for Apple were large, noisy and expensive. Many manufacturers have cut down on the size and noise, now **MEGAFILE cuts the cost.**

MEGAFILE is a floppy lookalike which allows the user to run DOS, PASCAL, CP/M systems—even all three together—without changing a single command. Why bother with a back up device when you can buy larger capacity drives at **"Low cost per Bite prices"** and use the extra low cost capacity to backup your important data. Drives set up as 5 + 5 and 10 + 10 will allow you to backup information at the touch of a button with the reliability of **Winchester technology.**

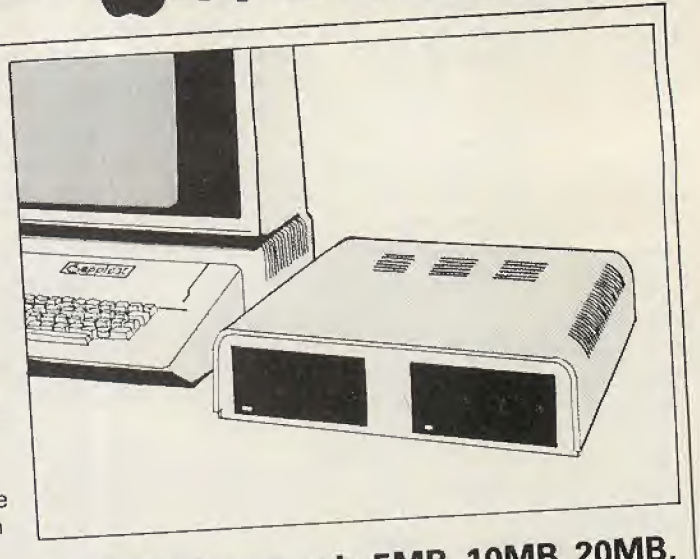

MEGAFILE comes in 5MB, 10MB, 20MB, 5 +5MB, and 10+10MB versions. Complete sub system prices start at £895 dealer enquiries welcome.

For more information contact: MEGATEK
6, SULINA ROAD LONDON SW2 4EL TELEPHONE 01 674 5696

● Circle No. 187

● Circle No. 158

Vertical Market Software from Padmede

The Restaurant Package

Specially developed for Restaurants who want to easily produce a Customer's Bill; maintain financial control of cash, credit card and 'On Account' sales, as well as maintaining Stock Records and Management Information.

The Travel Agents' Package

Specially developed for Travel Agents, PATAP provides control over Airline Ticket Reservations and automatically produces Airline Sales Reports. Analyses sales by cash, credit card and 'On Account', while automatically updating the Purchase Ledger Account for the Airline concerned.

The Garage/Workshop Package

Specially developed for the Garage/Workshop environment, PAGAP records Time and Materials used for the repair and maintenance of vehicles. Provides management with information on Work in Progress and chargeable work by individual employees yet to be invoiced.

The Retailers Stock Control Package

Specially developed for the Retailer who wants to know at a glance the Current Value of Stock over All Products or by ranges of Individual Product Groups. Provides management with information on Gross Profit, Turnover, Slow Moving Items and Outstanding Orders.

Padmede's Vertical Market Software is available on microcomputers supporting *CP/M 2.2, CP/M 3.0, *MS-DOS and PC-DOS. Comprehensive financial control is maintained via the Padmede Business Control System – a suite of financial management programs.

*CP/M is the registered Trademark of Digital Research Corp.
*MS-DOS is the registered Trademark of Microsoft Corp.

...proven, reliable and easy to use

Padmede
COMPUTER SERVICES

351 Fleet Road, Fleet, Hampshire.
Telephone: Fleet (02514) 21892.
Telex: 858893 Fletel G.

Meet the Business Demand of Tomorrow, Today

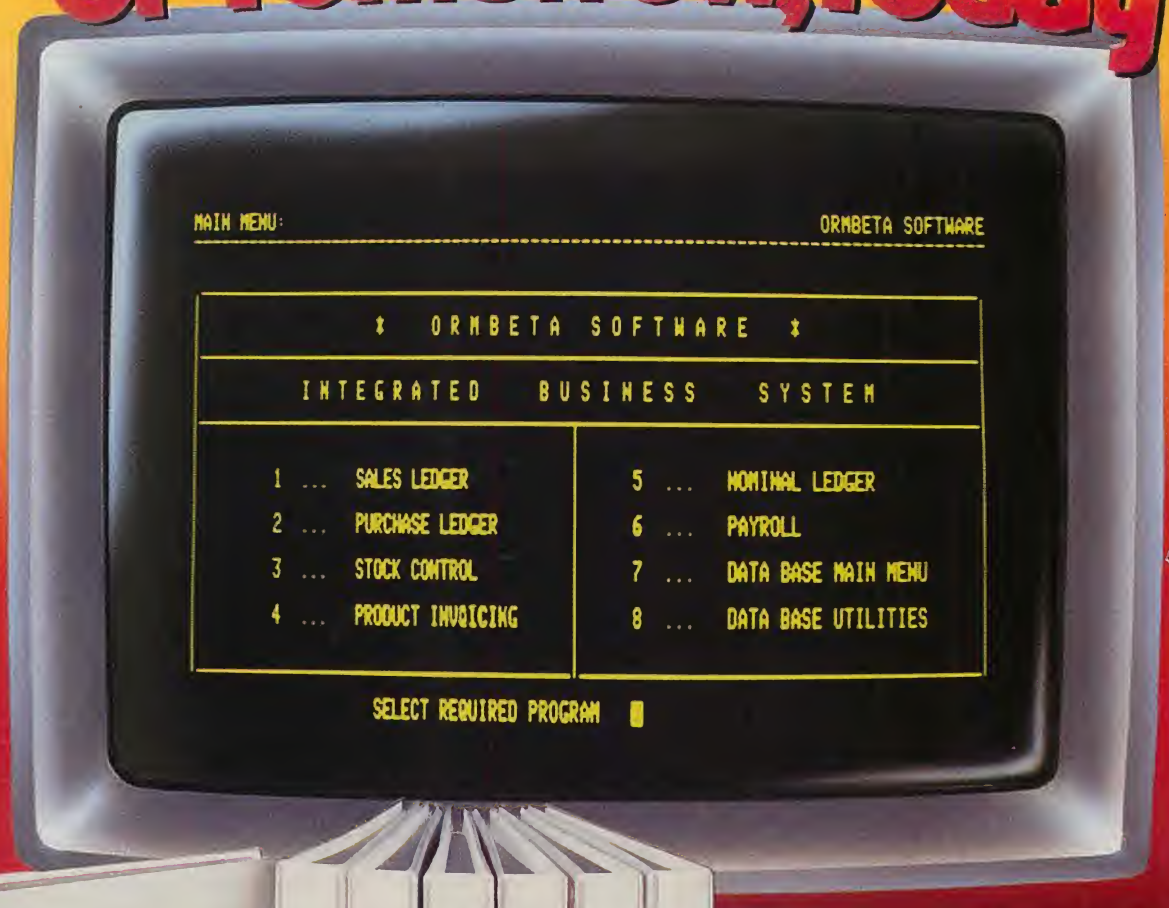

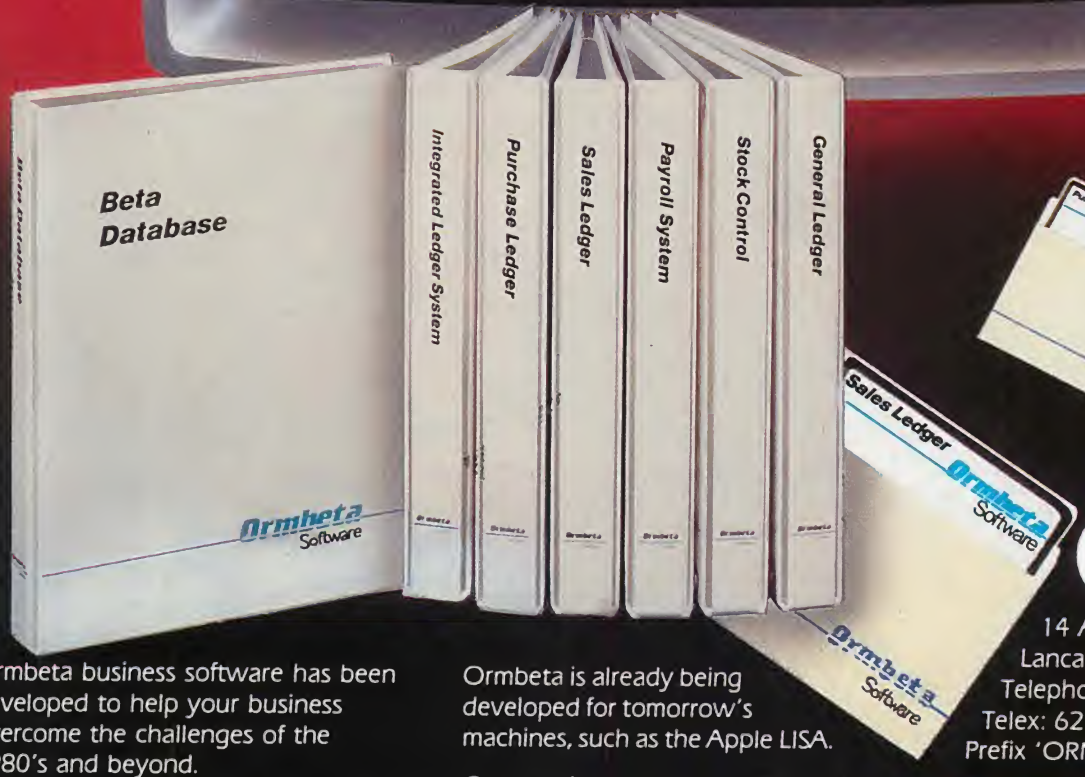

Ormbeta business software has been developed to help your business overcome the challenges of the 1980's and beyond.

Ormbeta is the most flexible business software so far developed in the U.K.

Ormbeta systems are in UCSD PASCAL, the world's finest and most efficient operating system.

Ormbeta can be supplied to run on almost any business machine on the market. Apple, IBM, Xerox, Sirius, Victor, and Sage, and more to follow.

Ormbeta is already being developed for tomorrow's machines, such as the Apple LISA.

Ormbeta includes all the 'off-the-shelf' packages, Sales and Purchase Ledger, Payroll etc, but can also be customised to particular requirements.

If you would like to find out how Ormbeta can help you meet the business challenges of tomorrow, or if you are a dealer and want to help others, fill in the coupon today – or telephone us now on Ormskirk (0695) 77043. You will never look back!

ORMSKIRK COMPUTER SERVICES LTD
14 Aughton Street, Ormskirk,
Lancashire L39 3BW
Telephone: Ormskirk (0695) 77043
Telex: 627110 & 628702 CHACOM G
Prefix 'ORMBETA'

I would like to discover Ormbeta, please send me your latest brochure ☐
I am interested in becoming an Ormbeta dealer ☐ *Tick as required.* ● **Circle No. 254**

Name .....
Org .....
Address .....
.....
.....
.....Tel.....P.C.

Never before has so much been available from so little, to so many.

Never before in the history of modern computers has there been available a totally portable machine with the ability to cope with so many demands, to so many people, in so many different business areas.

Epson, with over 20 years experience in designing and manufacturing high quality printers, have produced the HX-20, a precision machine with its own rechargeable power supply that can be used for just about any task within todays discerning business: from data capture to word processing, from card indexing to sales order entry. Communicating with other machines is no problem and the HX-20 is easily coupled to one of our fine printers. You can even link in another main computer system by using an acoustic coupler.

Don't be fooled by its size, the HX-20 has all the software back-up you'd expect from a much larger machine and incorporates many "bigger computer" features – 16k RAM expandable to 32k with serial interfaces, a full size typewriter keyboard, it's own built in LCD screen and a dot matrix microprinter. A micro-cassette facility is available as an optional extra.

A complete computer that will either stand on its own or could be the obvious extension to your existing system.

More and more people are finding out just how big the small compact HX-20 is. Why don't you find out for yourself – you owe it to your business.

EPSON

Extraordinary product. Exceptional quality.

Epson (UK) Limited, Freepost, Wembley, Middlesex HA9 6BR.
Sales Enquiries: Freefone 2730.
General Enquiries: 01-902 8892.
Telex: 8814169.

☐ I would like a demonstration of the HX-20 Portable Computer.

☐ Please send me details of my local stockist.

Name _____

Position _____

Company _____

Address _____

_____ Tel: _____

PC10/20

● Circle No. 245

DO YOU HAVE WHAT IT TAKES TO OWN A SANYO BUSINESS COMPUTER?

With so many micros on the market, choosing just the right one for your business can be extremely difficult.

But for those with a wise head for value, a keen eye for quality and a good ear for a sound investment, the choice couldn't be easier.

The Sanyo MBC range. A high quality system backed by a full range of software and peripheral equipment, that offers the very best possible value for money anywhere.

A well proven range, that's now been extended to include 3 new micros. The MBC4050, a powerful 16-bit micro and two new 8 bit micros, the MBC1150 and the MBC1250. The latter having the advantage of a full graphic function and high resolution 640 x 400 dot display screen.

As with all Sanyo equipment, great emphasis has been placed on their ergonomic design, thus ensuring the maximum ease and convenience for the operator.

If you're investing in micros, make a wise decision and take a look at Sanyo to see whether you've got what it takes.

SEE SANYO, THEN DECIDE

FOR FURTHER INFORMATION CONTACT OUR DISTRIBUTORS, LOGITEK, AT LOGITEK HOUSE, BRADLEY LANE, STANDISH, GREATER MANCHESTER. TEL: 0257 426644, OR CLIP THE COUPON ON THE LEFT AND RETURN IT TO SANYO.

SANYO

Please provide me with further information on the Sanyo 1983 Business Machines Range. I am particularly interested in (please tick):–

☐ Microcomputers ☐ Calculators ☐ Telephone Answering Machines

☐ Electronic Cash Registers ☐ Dictating and Transcribing Machines

Name

Company

Address

Position

Tel (Day)

Return to Marketing Dept, Sanyo Marubeni (UK) Ltd, 8 Greycaine Road, WATFORD, Herts. or Tel Watford 46363

● Circle No. 161

PC2

The state of the graphics art

The computer has had a revolutionary effect on games, business and the film industry, to mention but a few — but it is still early days.

IT IS ONLY a few years ago, 1976 to be precise, that computer graphics meant — for most people — Snoopy printed out in a pattern of Xs. To watch the old Teletype print out a naked lady was really awesome.

The following year the Pet micro brought block graphics to thousands. Pictures could be drawn on a screen, not in letters but in little squares, lines and other useful shapes. Then the revolutionary Apple II, in spite of a curious lack of lower case letters, brought user-definable shapes and bit-addressable graphics to anyone with a lot of effort and £2,000 to spare — in colour, too.

Today for under £100 it is possible to buy a colour micro that is capable of drawing, within limits, almost anything the programmer sets his mind to. Screens, whether TV sets or monitors, are the universal method of displaying output. The teleprinter is worth its weight in scrap metal as more and more dot-matrix printers gain the ability to print complicated graphics which may be dumped straight from the screen.

These developments have had a powerful effect on the computer games business. The old Pet version of Star Trek, played in black and white with two axes and a handful of alphabet, pales into insignificance when compared to today's high-speed all-colour all-action arcade games.

The effect on business computing has been quieter but no less revolutionary. It is still possible to use a computer to spew out columns and columns of incomprehensible figures. However, many project managers have found that a graphic flow chart has more impact. Salesmen and accountants have found that an appropriate graph, bar chart or exploded pie diagram can make the point quicker and more forcefully. Sales are going up, or down; the company's share of the market looks like this.

Graphic representations of figures are no longer confined to slide shows and audio-visual displays. They are commonplace in company reports and the financial pages of the best newspapers. This is partly because with inflation and the chaos of the international currency markets, few people have any grasp of what figures mean any more. The important thing is the trend. Graphics provide wonderful opportunities for massaging figures into attractive shapes — there are lies, damn lies and graphics.

Cynicism aside, business graphics can have a real value, and numerous software packages exist to provide any user with the facilities to produce them simply. VisiCalc, for example, links to VisiPlot and VisiTrend. The current fashion is for spreadsheet and calculation programs to include graphics as part of the package. Lotus 1-2-3, Context MBA and TK! Solver are examples. Graphics are an essential part of integrated operating systems such as Apple's Lisa. Companies like Hewlett Packard, Rikadenki and many more have developed the plotters which will draw suitable graphics with multicoloured precision.

Microcomputer graphics has come a long way in the last five years. Nonetheless there is still a long way to go. Displaying graphics remains a problem, in that TVs and most monitors cannot cope with real high-resolution graphics of 1,024 by 1,024 picture-points or pixels. Indeed, many micros are used with TV sets that are incapable of displaying even the limited resolution they are capable of generating.

However, even higher display capabilities should shortly become common on personal computers, thanks to the remarkable new NEC μPD 7220 graphics chip. This was runner-up in a recent American hardware-innovation-of-the-year competition, where the winner was the IBM Personal Computer. Two of these chips are used in NEC's Advanced Personal Computer to provide graphics resolution of 1,024 by 1,024 pixels, though the screen only provides a 640 by 475 pixel window onto this. Nonetheless, the display still requires 384K of dedicated video RAM. Even in these days of decreasing RAM prices, this is far beyond the reach of the home micro user and hard for many businesses to justify.

A real high-resolution colour display needs about a megabyte of RAM, but with 256K-bit RAM chips on the way, even this will become widely available in time. Another factor limiting the advance of computer graphics is the lack of standardisation between machines. A comparison of screen displays on small micros reveals every standard from excellent, as on the Acorn BBC Micro, to the truly appalling, such as the Dragon. Business micros ought to be more homogenous, but in fact are not; even half-a-dozen IBM PC look-alikes turn out to offer different screen resolutions. Such variations limit software portability because almost every graphics routine has to be rewritten to suit each micro

The solution, suggested at the American ACM Siggraph conference in 1977, is for a core graphics system. The idea is similar to the idea behind CP/M, where all the machine-dependent parts of the operating system are collected together in the BIOS, Basic input/output system. This, in theory at least, is the only part that needs to be rewritten for CP/M to run on different microcomputers. CP/M of course treats the screen display like a primitive Teletype terminal, which is why it currently does not lead to too many problems with the graphics display.

The Siggraph idea was to gather the machine-dependent graphics routines into a similar framework called the CGS or core graphics system. Applications programs would then present a common face to the CGS, which would translate their requirements to suit the particular machine in use. Thus programs could be more standardised and software portability greatly increased. Digital Research will shortly implement the idea in its GKS graphics kernal — addition to CP/M.

Such approaches represent a small step on the right road, but the computer graphics business is by no means settled yet. Systems like the Xerox Star, ICL Perq and Apple Lisa are still making pioneering advances in business graphics and CAD/CAM — computer-aided design and manufacturing applications. The moving graphics of arcade games such as Atari's Pole Position remain a terrible indictment of the graphics capabilities of most home micros. Beyond these there are computer graphics systems which require vast amounts of mainframe processing power, whether for films like Walt Disney's *Tron* or for more serious applications such as modelling or flight simulation for pilot training.

Computer graphics may have come a long way in a mere five years, but the changes over the next five should be equally dramatic.

Taking your TV for granted

Do you plug your micro into the first cheap display screen available? A little more information could help you get better results, says Chris Naylor.

MOST OF US can hardly remember a time when we did not have television to watch at home. Now computer users surely look back in vague awe to those times when output did not go to a screen.

The TV screen has become so much a part of our lives that the way it works seems almost to be beneath our attention.

In some ways the attitude is justified. After all, we just want to switch on and watch. Given a small, cheap micro we now want a cheap display screen. The domestic TV is the obvious first choice, but will it give good results? Perhaps a different model would work a bit better, or maybe a special-purpose monitor. The arrival of personal computers has been so sudden that your usual source of such information, the man in the local shop, will not know the answers either.

The cathode-ray tube or CRT is at the heart of every screen. The tube itself is made of glass, and is evacuated. At the thin end there is a heated element called the cathode, which is negatively charged and emits large numbers of electrons. Left to their own devices these electrons float off in all directions. However, further up the tube is a positively-charged series of plates, which make up the anode. Because electrons are negatively charged they are drawn towards it.

By the time the electrons get to the anode they are going so fast that they cannot stop, so they go charging on and hit the wide end of the tube. The wide end of the tube is coated with a phosphorescent material which glows when the electrons hit it, so when the tube is switched on the wide end glows with a sort of blurred light.

But not everyone wants a tube which glows evenly all the time, so there is another electrode, called the grid, in front of the cathode at the thin end of the tube. When this grid is lying idle it has no effect, but if you place a negative charge on the grid the electrons will not get a sight of the positively charged anodes further up the tube and so will have no incentive to go there. The result is that as the negative charge on the grid is increased, the flow of electrons diminishes. The glow from the bombarding electrons on the wide end of the tube diminishes too, and eventually ceases altogether when the charge on the grid is large enough.

A glowing tube whose brightness can be varied would be fine to light the room but not much good as a display medium. What is needed is a little more control, so first take a ring of electromagnets and place them around the neck of the tube to form an electromagnetic lens. Typically there are three of them and they bring the electron stream to a sharp focus as a dot at the centre of the phosphorescent screen. Electrostatic lenses are also possible. The focus control on the CRT adjusts the electron lens, and the brightness control adjusts the grid voltage.

To make the dot do something a little more interesting there are four plates arranged in pairs around the neck of the tube. If one plate is charged negatively and the opposite plate positively the electron beam deflects towards the positive plate. As there are two sets of plates at right-angles to each other the glowing dot can be moved to any point on the screen.

There is just one more thing to worry about and that is the phosphorescent coating on the screen. A phosphor carries on glowing even after electrons have stopped bombarding it. Some phosphors glow longer than others, though in general the glow does not really last long at all. There are three well known phosphors which can be used to coat the tube: fluorescein, which glows yellow-green; quinine sulphate, which glows blue; and chlorophyll, which glows red. By using any one of them or a mixture you can make the moving dot glow in just about any colour you want.

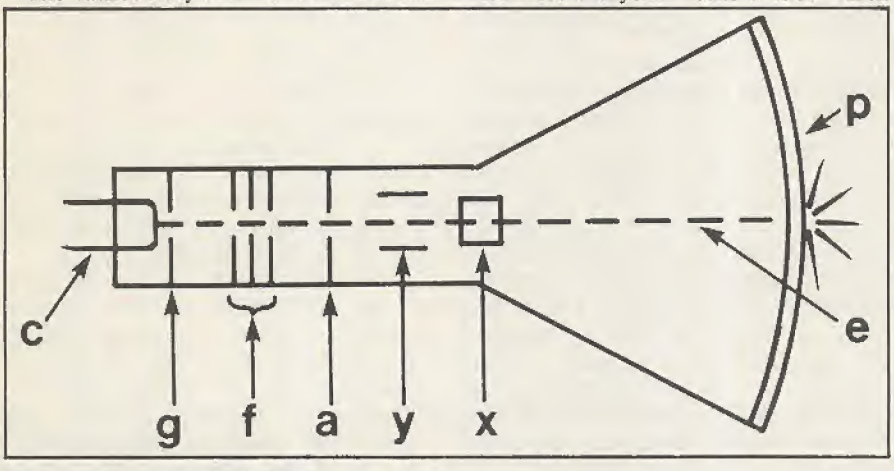

Figure 1. The cathode-ray tube.
c — cathode. Negatively charged and emits an electron stream.
g — grid. By increasing the charge on the grid the electron stream can be reduced, so it acts as the brightness control.
f — focusing anodes forming an electrostatic lens to focus the electron beam to a fine point on the screen; the focus control, if there is one, alters the charge on these anodes.
a — accelerating anode. Positively charged to draw the beam at high speed towards the screen.
X — X plates. Carry an electrostatic charge which deflects the beam from side to side.
Y — Y plates. Carry a similar charge but work up and down, at right angles to the X plates.
e — electron stream.
p — phosphorescent coating. Glows when struck by electrons; the colour of the glow depends on the type of phosphor used.
Some CRTs use electromagnetic fields rather than electrostatic deflection plates to control the electron beam, but the basic principles are the same.

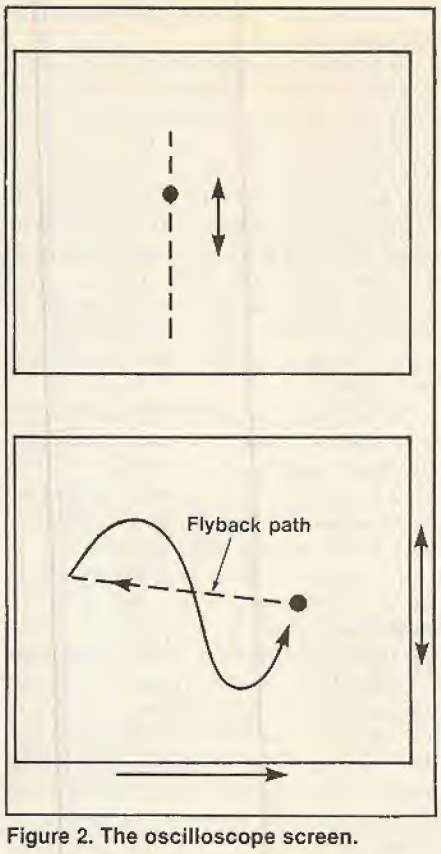

Figure 2. The oscilloscope screen.

Using only one input to control the Y plates only allows the dot to be driven up and down, which is not very useful. Using the atuomatic timebase on the scope, the dot can be steadily driven in X as well as Y to show the entire waveform plotted against time. If the interval between flybacks is the same as the time taken for one complete cycle of Y input then a complete waveform can be viewed.

With a device like the CRT available, why not stay with it? It's simple and fairly cheap. It can draw its dot anywhere on the screen, so surely it can handle the output from a computer. You just have to put a couple of digital-to-analogue converters on your computer to provide the X and Y inputs and you can drive the dot anywhere on the screen you like. This is what a vector scope does: it can draw anything, anywhere just as fast as the computer can send the X,Y data.

The snag is that the glow from the dot does not last very long, so you have to write a program to drive the CRT in X,Y and then put that program in a loop so that it keeps on driving the CRT in X,Y. If it does so fast enough, the eye will be deceived into thinking that it is viewing a stable, permanent image.

The speed at which the image must be redrawn depends on the flicker-fusion rate of the human eye, which is typically around 12 cycles per second. For a computer that is not very fast at all, but you do have to keep on doing it. Faster still is better, and to be on the safe side you might try doubling the rate to 25 cycles per second. Certainly, below 12 cycles per second the image will start to flicker in a fashion beloved of stroboscopic lighting specialists. A rate around the flicker-fusion rate can be very unpleasant, and can even cause fits.

As you are using your computer to drive the screen you cannot use it to do anything else — it is tied up displaying things. The answer is to have two computers. One drives the vector scope and the other carries out any other work, occasionally passing new plotting data through to its partner. In fact, if you buy a vector-plotting screen it will have, in effect, a second computer inside it to hold the plotting data that your computer gives it and to drive a CRT over and over again with that plotting data. With a good internal computer a vector scope can produce a very high-quality image, albeit at a very high price.

Oscilloscopes are built round a CRT which can receive only a Y input. That is, it can move the dot up and down the screen but not from side to side. Movement in the X direction is achieved automatically by the scope itself, and is usually called the timebase.

Suppose that you wanted to look at an image of a 1,000Hz audio tone. You place this signal on the Y input of the scope and the dot moves up and down 1,000 times per second, which is much too fast to detect by eye. However, if you slowly move the dot in the X direction at the same time the dot marks out the curve of the 1,000th wave being input. If the dot moves right across the screen 1,000 times each second, yhou would see one complete cycle of the input tone on the screen.

From a computer person's point of view, the oscilloscope illustrates two important points: the automatic generation of an X input to sweep across the screen, and a very rapid flyback to the

(continued on next page)

Screen test in Apple Basic.

```
10  REM :PRACTICAL COMPUTING SCREEN TEST
11 H = 1:CH = 40:CV = 20: REM :CH IS NO. OF CHARACTERS HORIZONTAL, CV IS C
     HARACTERS VERTICALLY
15  REM :CHECK FULL OUTPUT
16  HOME :A$ = "CHECK FULL OUTPUT": GOSUB 1000
20  TEXT : HOME : INVERSE
30  FOR I = H TO CH * CV
40  PRINT  SPC( H);
50  NEXT
55  GOSUB 1000
60  REM :CHECK SCREEN SHAPE
65  HOME :A$ = "CHECK SCREEN SHAPE ": GOSUB 1000
70  HGR
80 V = 159:H = 279: REM :H IS HORIZONTAL AND V IS VERTICAL
85 R = V / 4
90  HCOLOR= 3
100  HPLOT 0,0 TO H,0 TO H,V TO 0,V TO 0,0
101  HPLOT H / 2,V / 2: FOR I = 0 TO 6.3 STEP .04: HPLOT H / 2 + R *  COS
     (I),V / 2 + R *  SIN (I): NEXT : REM :THIS DRAWS A CIRLE IN THE CENTR
     E OF THE SCREEN RADIUS R
105  GOSUB 1000
110  REM :TEST LOW FREQUENCY RESPONSE
115  HOME :A$ = "CHECK LOW FREQUENCY RESPONSE": GOSUB 1000
120  TEXT : HOME
130  NORMAL : PRINT  SPC( 20);
140  FOR I = H TO CV / 2
150  INVERSE
160  PRINT  SPC( CH);
170  NORMAL
180  PRINT  SPC( CH);
190  NEXT : PRINT
195  GOSUB 1000
200  REM :TEST HIGH FREQUENCY RESPONSE
205  HOME :A$ = "CHECK HIGH FREQUENCY RESPONSE": GOSUB 1000
210  HGR
220  FOR I = H TO H - H STEP 2
240  HCOLOR= 3
250  HPLOT I,0 TO I,V
260  HCOLOR= H
270  HPLOT I + H,0 TO I + H,V
280  NEXT
285  GOSUB 1000
290  GOTO 15
1000  VTAB 22: PRINT A$: PRINT "PRESS ANY KEY TO CONTINUE ";: GET A$: RETURN
```

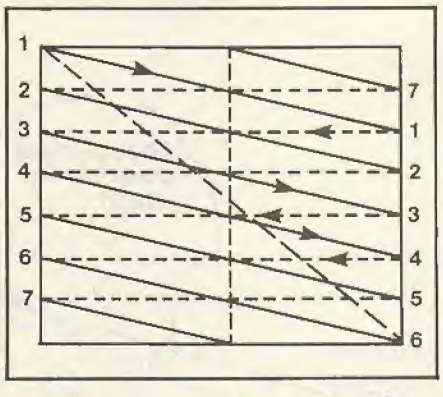

Figure 3. Interlaced scanning.
An interlaced scanning pattern for a seven-line system. Solid lines are drawn on the screen and scanned from left to right. Dotted lines are not drawn on the screen and represent flyback paths. In the first scan the odd-numbered lines are drawn; in the second scan the even-numbered lines are drawn. The diagonal flyback from the end of line 6 to the beginning of line 1 and the vertical flyback from halfway through line 7 are field flybacks. The horizontal flybacks are line flybacks. In the 625-line U.K. system 312.5 are covered in the first 1/50th of a second and the remaining 312.5 covered in the next 1/50th of a second.

(continued from previous page)
starting point so that the process can begin all over again. Using these methods it becomes possible to draw a two-dimensional picture on the screen using only one input rather than having to drive the screen in both X and Y.

At this point we come to television. The devices I have talked about so far can only draw things on the screen that can be represented as line drawings. But remember the grid and the way that it controls the brightness of the dot. If one input is fastened to the grid, the brightness of the dot can be varied at will. The dot is moved rapidly in both the X and Y directions so that it covers the entire screen in a very short time, a technique known as raster scanning. British TVs draw 625 lines 25 times per second so that a whole screen picture is drawn at twice the flicker-fusion rate. To make the picture appear even more stable the scan is interlaced: it is drawn in two passes, each lasting 1/50th of a second. In the first pass all of the odd-numbered lines are drawn, and in the second pass all of the even-numbered lines are drawn — see figure 3.

To synchronise an incoming TV signal with the TV set the signal includes some control pulses which set up the correct line synchronisation, or horizontal scanning and flyback, and frame synchronisation, or vertical scanning and flyback. In between these control pulses, in periods lasting just 1/15,625th of a second, comes the picture signal proper in the form of a burst of activity during which a varying voltage controls the grid on the CRT to vary the brightness of the spot at any given instant — see figure 4.

It is this video input which drives the set. The voltage level controls the brightness of the spot: a high voltage extinguishes the spot to give black on the screen, and a low voltage makes it bright, giving white. In the early days of TV the system worked the other way around.

In a perfect world every TV set would display a perfect picture, but in reality there are all sorts of disturbances in the incoming signal. Such unwanted information in the signal is called noise. The most common type of noise consists of high-voltage spikes which should not be there. With the old system they showed as a white spot, and early TV sets were plagued with a snowy appearance due to noise. The black spots produced by the more modern system are much less noticeable.

In normal TV reception the video signal is used to modulate an ultra-high-frequency carrier wave which is then broadcast. This UHF signal is picked up by an aerial and demodulated in the set to recover the original video signal.

If you want to drive an ordinary TV set from a computer you need a UHF modulator inside the computer to make the signal look like the normal broadcast TV signal. Since the computer's output does not have to be broadcast, it is clearly a waste of time to modulate the signal and then demodulate it again. Specialised monitors and some TV sets have a video input which will accept an unmodulated signal.

A computer drives the screen via a specialised collection of chips. The

(continued on page 99)

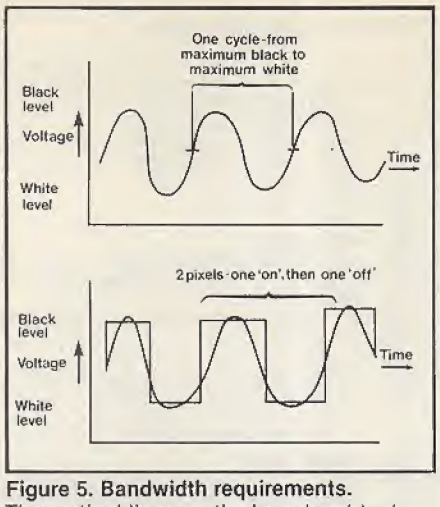

Figure 5. Bandwidth requirements. The vertical lines on the broadcast test cards are actually sine waves. To display 336 black-and-white vertical bars in each line scan of 1/15,626Hz of a second requires a bandwidth of 336 × 15,625 Hz, or 5.25 MHz. If your computer tried to send 336 black and white dots to each line it would almost certainly generate a square waveform. It could be approximated by a single sine wave of 5.25MHz, but not very well. The sharp edges of the square wave need higher frequencies to fill in the corners accurately. If the square wave has a frequency f, it will also generate sine waves at 2f, 4f and so on. It will expect, in this example, a bandwidth of 10.5MHz if you try to generate a screen picture 672 pixels wide.

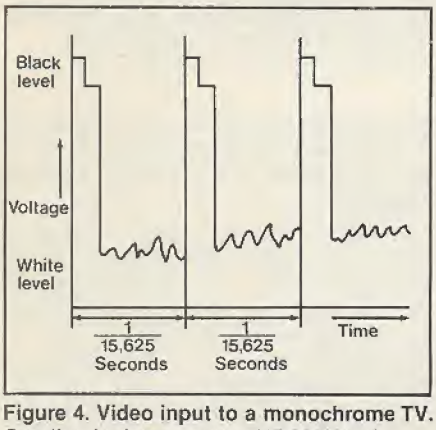

Figure 4. Video input to a monochrome TV. One line is drawn every 1/15,625Hz of a second. The first part of the video signal is a high-voltage line-synchronisation pulse, followed by a slightly lower voltage corresponding to a black tone, during which the flyback occurs. The signal proper then follows. A synch-ronisation pulse initiates the next line flyback and another line is drawn. A similar method is used at the end of each frame scan to initiate a frame flyback.

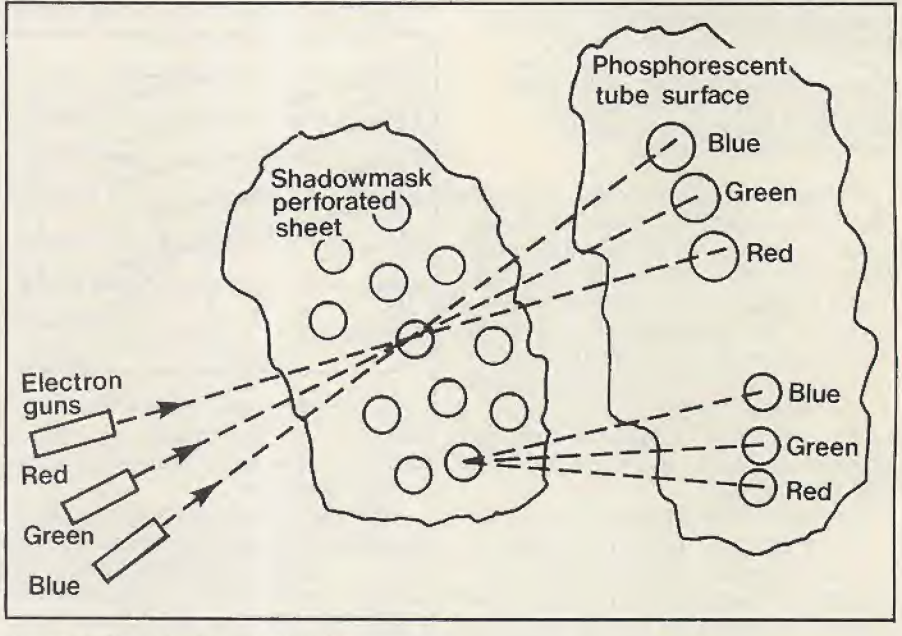

Figure 6. The shadow mask tube. The shadow mask colour tube has three guns all angled inwards. All three electron beams meet at a single point so that they can be focused and deflected as one by arranging the controlling electromagnetic fields to act at this point also. Directly before the phsophorescent tube surface is the shadow mask, a sheet with thousands of tiny perforations. All three beams pass through each hole in the mask, and so for each hole there are three dots of phosphor on the surface of the tube — one red, one green, and one blue — arranged exactly so that the beam from each gun hits exactly the dot that belongs to it. By controlling the output from each gun an impression of any colour can be formed at any point on the surface of the tube. Unlike the monochrome tube the beam cannot really be directed to any point on the surface, but only to those points corresponding to holes in the mask. On black matrix screens each individual dot of phosphor is surrounded by an opaque black ring which improves the colour definition. The main exception to this general arrangement is the Trinitron tube which uses a system of vertical slots in the mask rather than individual holes. The Trinitron method is said to give a brighter picture.

A PERFORMANCE AND PRICE BREAKTHROUGH IN APPLE][® & //e HARD DISC STORAGE

High Performance AID hard disc systems of 5-20 megabyte capacities, specifically designed for use with the Apple, are now available running under DOS, CP/M & Pascal. The units cold boot and throughput speeds are really impressive. If you want to leave others standing, try our fast DOS option!

The range features the 5+5 and 10+10 drives which enable you to configure half the drive as primary and half as secondary storage for ease of archiving.

The systems have been designed around the concepts of data reliability and convenience of operation.

They are simply the most competitive hard discs on the market. So why pay more for less.

interface INTEC technology

INTEC, 191 Clarence Gate Gardens, Glentworth Street, London NW1 6AR. 01-723 6305. Tlx: 8813271 GECOMS G

AID

LOW PRICE

5 Mb	£990
10 Mb	£1270
20 Mb	£1490

All prices ex-VAT.
Apple is the registered trade mark of Apple Inc.

DEALER ENQUIRIES WELCOME

● Circle No. 162

For those who thought choosing a user friendly, high capacity, software compatible, multi-user, business computer was a black and white decision:

The RAIR Business Computer...

in colour.

For details of your nearest Authorised RAIR Business Computer Dealer contact Phil Harris, Rair Ltd., 6 - 9 Upper St. Martin's Lane, London WC2H 9EQ or telephone 01-836 6921

● Circle No. 163

(continued from page 96)

standard signal formats for driving TV sets are so well known that there really is no reason for the video generator to produce a bad signal. Yet you will not always get a perfect picture: for instance, if the line and frame synchronisation is wrong you will get a complete mess. The problem is too clear-cut to be likely to arise, but you can still find your picture is less than perfect without being a complete disaster.

In a monochrome set bandwidth and resolution dictate how much detail you can see. The Apple II in Hires mode will draw 279 dots on one line horizontally, say a succession of bright pixels and dark pixels — 139 bright pixels in all. This pattern is roughly equivalent to a wave going up and down 139 times. It has to do so within the 1/15,625Hz of a second it takes the line to cross the screen, so the frequency of the signal is 2.17MHz. Any set should be able to cope with a bandwidth like this.

Broadcast test cards have a series of vertical gratings from which you can judge the bandwidth of the set. The highest frequency, corresponding to the finest grating. If your set can resolve the lines on the finest grating then its bandwidth is 5.25MHz at least.

There is an important difference between TV test cards and a row of computer generated dots. The gratings are not real, vertical bars but are actually sine waves — they do not start and stop with a sharp edge. The computer's pixels do have sharp edges, and this raises the bandwidth requirements. The Apple Hires dot is a square wave which requires a whole series of higher-frequency sine waves to represent it accurately.

To fill in the corners with a frequency twice that of the basic signal raises the bandwidth to 4.34 MHz for good graphics — see figure 5. Doubling the frequency again brings the bandwidth to 8.69 MHz, and at this point, the bandwidth requirements start to exceed the capabilities of most domestic TV sets. The broadcast frequency allocations allow only 8MHz per channel, so that is all a TV set normally has to cope with. Purpose-made monitors can have bandwidths of, say, 24MHz, which is easily enough for anything the Apple might produce.

Working out your bandwidth requirements from your micro's high-resolution graphics mode can give some useful insights into what you really need from your screen. You can then go on to look at the advertised bandwidth of monitors or, in the case of a TV set, tune in to a test card to see the likely bandwidth it will accept.

The next group of things which can go wrong hinge on the nebulous concept of quality. A TV picture is a very boring thing technically. Broadcasters know that most people have mediocre TV sets and they transmit easily displayed signals to match them. Computers are different; they can send anything to the screen, and the demands they make on it are that much higher.

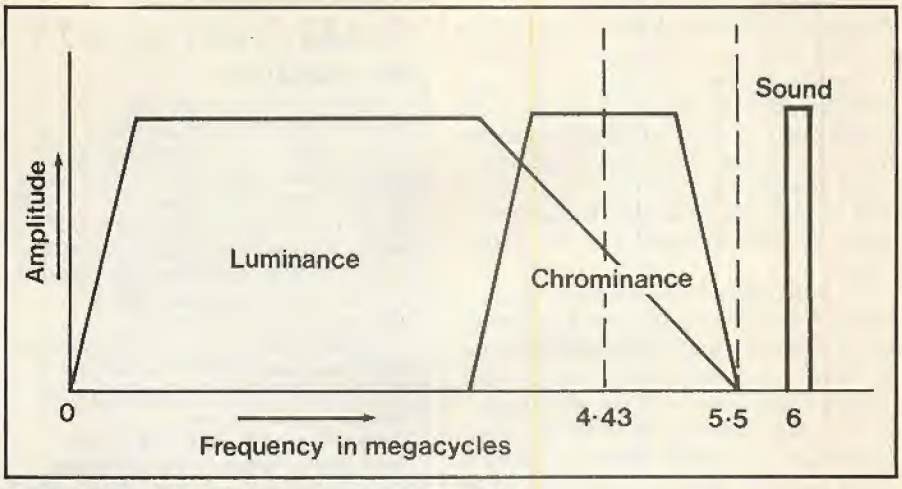

Figure 7. Allocation of bandwidth in broadcast TV.
In a colour broadcast the luminance or brightness information is transmitted in the lower frequencies. Above it is a band centred on 4.43MHz which contains the chrominance or colour information, followed by a very narrow band centred on 6MHz which contains the sound information. Because of the way a TV picture is transmitted the overlap of luminance and chrominance is not usually serious. In the overlap area the luminance signal tends to occur in clumps, and so does the chrominance signal, and these clumps tend to be in different places within the overlap area. But your computer may not be quite so well behaved as this. if it generates luminance signals over about 4MHz they are likely to be interpreted as colour information, and at 6MHz they may be interpreted as sound. A screen width of over 500 pixels or thereabouts may give problems with some colour TV sets if the input is to the aerial socket. Using an RGB input bypasses the problem because the signal does not then have to be decoded by the set.

Switch on your computer and display some text, tuning the TV monitor to give the best possible display. Now display the same data using inverse characters and see what happens. Ideally it should be as clear and neat as before, but it may not be. The shape of the text may change, smearing slightly to the right, and if you display half a line of inverse characters the second half of the line may appear blacker than the rest of the screen, as if the bright inverse patch had cast a shadow.

TV sets are not usually called upon to display solid patches of maximum brightness, and your set's power supply may not be quite up to the job. The result is that after showing a block of maximum brightness the voltages in the set start to sag producing a reduced level of brightness immediately afterwards. Inverse text written all over the screen is most taxing of all. If anything will make the screen sag that will.

You may also notice little black dots all over the place. The modern system of having a high voltage on the video signal for black and a low voltage for white is fine for suppressing the effect of noisy spikes as long as the basic background is dark. If the screen has a white background the noise really shows badly because now you can see the black noise dots. If you want to use inverse a lot you should try to find a monitor that works the opposite way round.

Most people use a colour TV set for viewing nowadays, and they often use the same set with their computer. A colour TV tube is exactly like a black-and-white one, except that it has three of everything. In a way, it even has three screens to give red green and blue phosphorescence.

Any problems with colour sets almost always arise from the methods used to code the colour signals. Figure 7 shows how the British PAL system of colour transmission works. Within the 8MHz bandwidth allocated to a single broadcast channel, the bottom half of the bandwidth is taken up by the luminance or brightness information, with around 4MHz devoted to the chrominance or colour information and a very narrow band to carry the sound signal. Black-and-white sets only pick up the luminance information, so colour signals can be used by everybody, whatever type of set that they have.

The luminance information must not exceed about 4MHz — if it does, it may be misinterpreted by a colour set as chrominance information. Next time you watch TV look out for high-frequency luminance information which is misinterpreted in this way. The fine detail of tweed clothing often causes problems, so people rarely wear tweeds on TV. Bright objects are also problematical. The reflection from a gold candlestick, for instance, can produce a very high-frequency edge in the picture which is mistaken for colour information to produce a sudden, vivid splodge of colour. If the object is moving to the left the problem may be even worse as it causes a Doppler effect which pushes the frequency even higher.

What bandwidth do you really need? Push 8MHz into a colour TV and the

(continued on next page)

(continued from previous page)

picture will really break up. It may even be so bad that it invades the bandwidth normally reserved for sound and your Hires graphics finish up coming out of the loudspeaker. If your computer is causing this cross-colour effect then there is not much you can do about it. All that can be said is that the computer manufacturer ought to have designed the TV output better.

If you would be happy with a monochrome picture try switching the set to monochrome and the disturbance may go away. All sets have colour-killer circuits so that if a black-and-white picture is being received it is not spoilt by colour fringing at the sharp edges of objects, where a high-frequency luminance signal exists. The colour-killer circuits are normally switched in when the set detects an absence of the chrominance information which normally occupies the higher frequencies. But any high frequencies generated by your computer in the luminance band may fool the colour-killer circuits into thinking there is some colour there. In that case your picture bursts into a glorious display of unwanted colour as everything is turned on for you.

The other problem which can arise with colour comes from the different broadcast standards around the world. All British TV sets use the Pal standard. In France they use Secam, and in the U.S. they use NTSC. So make sure you buy a computer with a Pal output otherwise it will not work with your British TV.

If you wanted to set up a small business you could go out and buy in a lot of black-and-white portable TV sets that nobody else wanted, remove the loudspeaker and the aerial socket, add a video input socket and sell the end-product as a perfectly adequate computer monitor. I am not suggesting that this is what monitor manufacturers actually do, but a monitor is really just like a monochrome TV. How good a picture it gives depends on how well it has been designed and built. When buying a monitor you must, if possible, see it in action before signing the cheque.

In theory a monitor will be better than a TV set for displaying computer output. The whole thing should be better engineered to start with and can make use of the fact that it never has to handle a TV signal. The bandwidth can be very high — up to 24MHz in some cases — and because the screen does not have the dot-matrix pattern of the colour tube it will be capable of revealing this greater detail.

Do your bandwidth sums again: 24MHz gives a frequency of 1,536 per line, so the set could resolve a basic 3,072 pixels. But remember that it will still be working at 625 lines vertically, so you will have nearly four times the resolution in the horizontal direction as in the vertical direction.

At 14MHz you can resolve about 1,500 pixels, around 20 pixels for each character on an 80-column output. Divide by two to fill in the corners on square waveforms and you have 10 pixels per character. Because the monitor uses a video input, rather than relying on an add-on UHF modulator, the picture quality will be better than a TV anyway so it only remains to test the monitor to make sure that it is not doing anything horrible.

To test a screen connect your computer to it, using video/RGB input if possible. If you have to use an aerial socket use shielded coaxial cable because the UHF modulated signal is very susceptible to losses. Keep the cable as short as possible.

Display a screen of solid white. For instance on the Apple's 40-by-20 text screen enter:

```
FOR 1 = 1 TO 40*20: PRINT SPC(1);;NEXT
```

to check that the picture is rectangular at full output. Then switching to high-resolution graphics enter:

```
V = 159:H = 279: REM: V IS VERTICAL
PIXELS, H IS HORIZONTAL
HGR
HPLOT 0,0 TO H,0 TO H,V TO 0,V TO 0,0
```

This is to draw a thin, white border on an overall black background and allows you to check that the screen shape remains good at low output. Go back to text again and enter:

```
NORMAL: PRINT SPC(20);
FOR I = 1 TO 10
INVERSE
PRINT SPC(40);
NORMAL
PRINT SPC(40);
NEXT
```

This draws a series of solid bars of white alternating with black, each extending halfway across the screen. At the middle of the screen, where a white block ends, look for a darker than usual black band following it. Is it darker than the black band preceding white on the next line down? If it is, it shows that the low-frequency response of the set — the extent to which the power sags after displaying a solid patch of white — is not as good as it should be. On a normal TV the same effect is sometimes introduced deliberately because it can appear to sharpen the image up a little.

Now go back to high resolution again. Enter:

```
FOR I = 1 TO H – 1 STEP 2
HCOLOUR = white
HPLOT I,0 TO I,V
HCOLOUR = black
HPLOT I + 1,0 to I + 1,V
NEXT
```

to draw a series of vertical black-and-white bars over the surface of the screen. If there are H pixels per line, the high-frequency response is H/2 cycles per line or H*7,812Hz.

If the set performs these tests without trouble then it is a fairly safe buy. If you want to examine it further using broadcast test cards you will find one transmitted on Channel 4.

Guide to buying a TV or monitor

1. Work out your bandwidth requirement. If it exceeds 4MHz to draw a row of 500 pixels in high-resolution graphics then you cannot safely use a normal colour TV unless it has an RGB input. You can use a black-and-white set, or you can buy a high-resolution colour monitor. An 80-column output will normally require too high a bandwidth for a colour TV.
2. If you decide to use a normal TV try to get one with an RGB input rather than using a UHF modulator to feed into the aerial socket.
3. Always ask to see a test card displayed on a set — you should be able to resolve the finest of the vertical bars on the card, corresponding to 5.25MHz bandwidth.
4. If possible, try out the set you are thinking of with the computer you intend using. Test it with high-resolution graphics and 80-column output if you have it. Also try it with inverse text and draw blocks of maximum brightness. Look for distortion in the shape of the picture.
5. If you can, buy a set with Prestel or Ceefax on it. Displays on these channels are very similar to what your computer may send to the set; if it cannot cope with teletext it will probably not do very well with computer output.
6. If you feel you can live without colour, then a black-and-white portable makes a very good buy and you will not be plagued by cross-colour effects. However, the power supply may be rather light, causing distortion on inverse text.
7. The safest and most expensive choice is a purpose-built monitor with 14MHz bandwidth or more. The colour of the screen phosphor for a mono monitor is a matter for personal taste.
8. The next safest choice is a black-and-white portable. Look at a test card on it and check its behaviour with inverse display. Try to get one with a video input on it.
9. A colour set with RGB input on it and one of the information channels is ideal. It should not give any problems unless you want very high resolution, but try it with your computer anyway.
10. The most difficult item is a cheap colour TV with only the aerial socket as input. A high-resolution display or an 80-column card is very likely to send it haywire. If you are thinking of buying one check it out very, very carefully first.

Health warning

Having read this article, you may feel tempted to try messing around inside your TV set. DON'T DO IT! If you were not sure how to do it before then you do not have enough knowledge to poke around inside a TV set. A TV contains a live chassis, and the tube usually works at tens of thousands of volts. It is easily the most potentially dangerous device in the home.

Multi-million dollar industry

John Lewell assesses the computer graphics business.

IT STARTS with a distant view of the galaxy, then enters the solar system, approaches Earth, descends through the atmosphere and ends up exploring the retina of an insect's eye. It is the ultimate zoom, a computer-graphics device beloved of a number of film makers.

The computer-graphics industry itself is becoming so huge that you have to step back a long way before you can fit it all in the picture. It is estimated by Frost and Sullivan that the industry will be worth $14.5 billion a year by 1990.

The scientific uses of computer graphics are many and wondrous, and without the new imaging techniques much scientific research would grind to a standstill. Computer graphics are used for plotting the paths of particles in high energy physics; for designing new drugs; in genetic engineering; for cartography; for enhancing the images sent back by space probes; for representing bone structures prior to surgery; for designing semiconductor chips; for modeling abstract theories; and for showing the effects of stresses on man-made objects.

Computer-aided design comes into a separate category, as it is specifically concerned with product design. CAD systems are used by engineers, industrial designers, architects, aerospace and car manufacturers, and by printed-circuit board designers.

CAD/CAM, the extension of computer-aided design, carries the process through to computer-aided manufacturing. With it a product may be manufactured automatically as soon as the design has been completed by linking the CAD system and the numerical-control machinery that is used in milling and molding processes.

All the specifications for the new product are held in a database while a three-dimensional model of the product is constructed by the designer on an electronic graphics display. When everything is ready and the computer has made all the analytical tests, modified information is passed to numerical control where lathes, mills, drills and molds are automatically set to the new specification. Presto! Your industrial robots have made a new ashtray, or space shuttle or a better mousetrap.

The category loosely labelled "business and presentation graphics" is the area of most interest to personal-computer users, and it is the one on which we shall be concentrating. Few companies in the business-graphics area are more than 10 years old, most of them are more like 10 months old. Office graphics is very much the younger sister to scientific and CAD applications.

Within this enormous category you can find some very strange bedfellows. An animated ABC Television logo and an analytical paper graph showing the sales performance of General Motors have little in common other than the fact that both images were generated on a computer. Business and presentation graphics may exist in electronic form, on video tapes and discs, and in computer memories. Or they may be placed onto hard copies — photographic film, paper, or plastic.

Each of the three main computer-graphics categories contains a multitude of different stories but the third one, business and presentation graphics, is the most varied of all. The entire range of computing power from the massive Cray I down to the Sinclair ZX-81 can be applied in this category.

As microcomputers become more powerful they begin to play a larger role in all aspects of business and presentation graphics. Whereas research scientists and motor-car designers continue to rely on their mainframes and super-minis, the business user is finding that his other graphics needs can sometimes be met by less expensive systems. The most effective graphics hardware is currently to be found in the mid-range of computers, though you will be wise to keep one eye on those micros. The future may well belong to pint-sized processors.

Moving closer to the subject, you can see the industry in greater detail. Looked at in terms of products rather an activities, there are three main types of graphics display: the direct-view storage tube or DVST, the stroke-refresh display, and the raster-refresh display. You are more likely to encounter the stroke-refresh type in engineering and architectural design applications, and the raster-refresh type in business and presentation graphics.

The DVST was developed in the late 1960s mainly in an effort to bring down the cost of graphics displays. It forms an image using an electron beam that moves more slowly than in other devices. The image is stored temporarily on a mesh in which the phosphor is embedded. For simple applications, the DVST is still very popular since it does not require the expensive additional ciruitry known as a refresh buffer.

Line-drawing displays date from the mid-1960s. They show line drawings by instructing the electron beam to connect end-points which have been digitised into the computer memory. The display processor and display-buffer memory then assemble the picture by repeatedly passing instructions to the electron gun which writes the picture on the screen.

Raster-graphics technology is closer to the operation of a normal TV set. Picture information is stored in the buffer in terms of picture elements or pixels. The horizontal scan lines of the display are now composed of these individual picture elements, the whole raster being a matrix of pixels. This technology burst into prominence in the mid-1970s and is destined to become the major type of display. It appeared late on the scene because far more computing power is required to calculate the intensity and colour values of millions of pixels than to calculate just the end-point positions of vectors in a line-drawing display.

To judge the resolution of a raster display you can simply count the number of pixels; a matrix of 512 by 512 is considered average. However, when a picture is split up into discrete square elements there is a loss of resolution especially in representing diagonal lines, which tend to look like

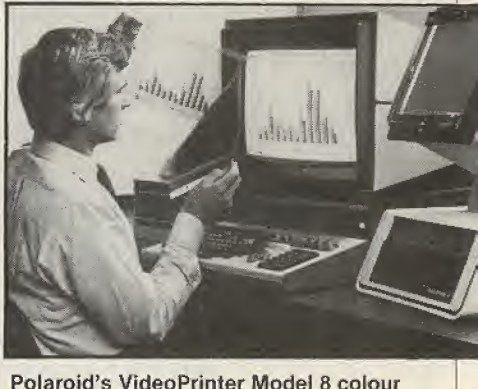

Polaroid's VideoPrinter Model 8 colour film recorder.

staircases. A software technique called anti-aliasing has been developed to smooth out the jagged lines. In it the intensity values of pixels that are adjacent to areas of solid colour are adjusted to create the illusion of smooth edges.

The main difference between vector and raster displays is the ability of the raster display to show solid areas of colour, something which is essential in business graphics. Industrial designers, too, are becoming increasingly interested in raster systems because they can simulate the actual appearance of a product by solids modelling. Another plus for the raster approach is that the screen never flickers, however much visual information is crammed on to it. Vector displays suffer from this complaint because the refresh time can easily be exceeded by the time taken to write the whole image. On the other hand, raster systems rarely match the resolution of good vector systems.

"Interactive" is a word which one often finds associated with computer graphics. The idea of a human being interacting with a computer-driven display was inherent to the very first step taken by Ivan Sutherland's Sketchpad program in 1963. Since then, the technology has been refined to a point where even voice recognition has a role to play, though most interaction is still through touch devices. They are used both for inputting and controlling the lines, dots and shapes that comprise the picture.

Interactiveness comes at many levels. It is possible to address an electronic image in machine code via an alphanumeric keyboard, but no one should really describe that as being truly interactive. What is portentously called the "human/machine interface" is dependent on having a number of convenient input devices so that artists, designers and other ordinary mortals can make pictures with the computer. Among the devices available to input or control picture information are: data tablets and stylus, touch-sensitive screens, light-pens, keyboards, joysticks, tracker balls, control dials, function switches, hand cursors and mice.

A mouse is a small hand-held locator device that can roll across a flat surface while keeping track of its own position. Two sets of tiny wheels set at right-angles in the base of the mouse register changes in movement in two dimensions. The instrument is used for locating positions of points that are to be entered into the computer memory. This process is known as digitising.

Other digitising devices for inputting pictures include the hand cursor and the stylus and tablet. The hand cursor, like the stylus, works in conjunction with a sensitive tablet. It has "cross-hairs" to indicate the point-positions. Function switches are often included on a hand-cursor to give various instructions, such as Pick or Select.

Manufacturers have really gone to town with data tablets. Sonic tablets, for instance, measure the stylus position using

The Gradis 2000, with the operator holding the cursor which is used for digitising.

strip microphones along two adjacent edges. The microphones pick up sound waves from the tip of the stylus, which emits a small electrical spark. Far more accurate — and quieter — is the tablet that has a grid of wires embedded in its surface. The co-ordinates of a point are then picked up by the stylus as variations in voltage. Yet another method is to use special material for the surface of the tablet through which electrical pulses can travel at right angles to each other. The pulses are emitted at regular intervals and so the stylus position can always be calculated.

A graphics tablet is a simulation of an artist's drawing board. Instead of seeing the image on the board you see it on a screen. Combine the tablet with a stylus which simulates a brush or a pen, and you really begin to feel like an artist. Whenever the stylus touches the tablet, a pressure-sensitive switch in the tip signals the location. A cursor may appear on the screen or, depending on the program, a pixel may be illuminated. Move the stylus and you get a row of pixels where before you had a blank screen.

Touch sensitive screens are used in some systems to give the operator a more direct contact with the electronic image. No screen cursor is then needed. There are both low-resolution and high-resolution touch screens, having 10, 50 or even 500 resolvable positions vertically and horizontally. Like the tablet, they work on several principles, including both light-wave and sound detection.

Light-pens detect light on the screen by means of a photocell located either in the pen itself or at the end of a fibre-optic pipe. They are more useful as positioning devices in line-drawing systems than as mere pointing devices in raster displays. To position images they require a tracking program in the computer software.

Keyboards are familiar to all typists and programmers. The chord keyboard, however, is a five-button device that is played like a midget's piano. You can generate 31 different instructions on it if you are clever — but beginners should stick to the normal alphanumeric keyboard.

Joysticks and tracker balls are used for scrolling or panning the screen image. A joystick is also convenient for tumbling a wire-frame or a three-dimensional model in space. Control dials and function switches help you give instructions quickly and efficiently without having to type in more precise details on the keyboard.

The trouble with computer graphics is that people still want to carry images around with them. They like to look at them on the bus or scrutinise them in the boardroom, or project them on to a screen.

Far from decreasing the amount of printed material computers are actually increasing the quantities of paper and photographic products we consume.

Electromechanical output devices convert electronic images into hard copy. Both printers and plotters come into this category. Plotters draw while printers imprint — yet ink-jet printers imprint without even touching the paper.

The cost of electromechanical output devices range from a couple of hundred pounds for a single-pen plotter up to several hundred thousand for a sophisticated film recorder. Most of the devices have potential applications in making presentation and audio-visual graphics.

In film animation you do not have to use a film recorder: you can use a pen plotter instead. The computer-generated sequences for the American TV series "Music in Time" were created by taping an animation peg-bar on to the paper in a mechanical-arm plotter. The computer drawings, all in exact register, were later photographed and coloured by an optical camera.

Electrostatic printers are sophisticated photocopying machines, and Xerox is the leader of the pack in this field. For computer graphics they are both fast and economical, using either a matrix-writing technique or a photoconductive plate at the heart of the system. In matrix writing an

(continued on next page)

Multi-million dollar industry

(continued from previous page)

invisible image is placed on to the paper by a electrostatic charge applied by a matrix of needles. Liquid toner is then wiped on to the paper, and clings to the charged areas. In an alternative method, the image from an internal cathode-ray tube is transformed by a photoconductive plate into an electric charge on the paper.

Laser printers work in a similar way to the second electrostatic method, except that a laser beam is used instead of a CRT electron beam. These machines are very fast: the Xerox 6500 CGP prints 180 colour copies per hour, and Xerox has a machine that can produce 7,000 black-and-white charts per hour. Both electrostatic and laser can print in full colour on to a variety of media by applying carbon particles in seven colours: cyan, magenta, yellow, red, green, blue and black.

Impact and non-impact plotters tend to be relatively low-resolution devices which are well suited to providing hard-copies of raster images. Impact plotters work like sophisticated typewriters in that they use ribbons and hammers for printing. Non-impact printers work on a variety of ink-jet principles, spraying coloured inks on to paper without any physical contact between the surface being printed on and the jets. Non-impact printers are also ideal for putting images on to fragile materials.

Photographic recorders produce slides or prints from individual frames, either directly from a CRT or by collecting and reassembling the picture information. When a CRT is photographed directly the scan lines will appear in the photograph. A photographic recorder, introduced a controlled amount of blur into the picture so that the lines disappear. Sophisticated electronics are needed to match the red, green and blue CRT output with the response of photographic films.

Film recorders are similar to photographic recorders — but are around 100 times more expensive. Film recorders of this type use a special internal black-and-white single-line raster-scan CRT to display the image. Its scan is closely co-ordinated with the film transport so that the film moves a fraction of an inch after each scan line to build up an image. Colour is introduced by using a filter assembly. A powerful minicomputer analyses the image into primary colours and intensity values.

Once you have established what kind of hard copy you require, the next step is to specify the operating mode. In on-line plotting, the machine is connected to the host computer by cable. The method is fast and convenient — and expensive too because of the computer time involved. Off-line plotting makes copies from data supplied from storage media such as tapes or discs. It can be used with a central hard-copy facility, when operators can be specially trained in this aspect of graphics.

System companies take equipment from original equipment manufacturers, design and build additional hardware, and put the whole system together as a package for specific applications and markets. They may also write or commission special software to run on their systems. Unfortunately many end-users simply do not take the trouble to shop around. If they deal with IBM for, say, data processing systems, they wait until an IBM salesman brings around a new graphics product. The alternatives are to spend weeks sifting through mountains of information, attending lengthy demonstrations, or employing a consultant.

The best approach is to hire a generalist consultant. He can suggest specialist consultants who will work with you to purchase and commission a system. Remember that computer graphics is more than just a slide-making system.

The systems of scientific and technical graphics, and for CAD/CAM need not concern us. The business and presentation graphics category contains a myriad of systems companies.

Analytical systems help us to understand the output of the computer in graphic form; presentation systems produce custom-made graphics for business presentations. Plenty of overlap exists between the two types, but the distinction is important. There is a big difference in manipulating a billion pieces of data when you make a business graph, from merely generating a computer image because you like the look of it.

Business graphics are divided into analytical and presentation systems. The products themselves can be further divided into hardware and software solutions. Hardware solutions involve purpose-built display hardware. Stand-alone systems which are usually minicomputer based are available in this category and can often be hooked into a larger data base.

The software solution is becoming increasingly popular as CPUs become more powerful. It involves the generation of graphics displays by running sophisticated software through a general-purpose computer.

Business users are demanding high resolution, ease of operation, speed, and an ability to hook into a corporate data base. A state-of-the-art device with these features will also give good performance per dollar.

When you increase the resolution of a display, for example, you immediately meet with the law of diminishing returns. As you double the number of pixels on each axis you are quadrupling their total number. Displays also feature a number of pixel layers — or planes — in the z-axis, the depth of the picture, and while this is not directly related to resolution it effects the number of colours that the display can handle.

A new feature that has been introduced by Raster Technologies, a Massachusetts company, is a graphics display system that allows you to put the image on to either a 512-line monitor or a 1024-line monitor. With its Model One/40 you can also select the full display on the higher-resolution screen or window into the image memory in the 512 mode. The product can be described as state-of-the-art because it meets the requirements of high performance, versatility and relatively low cost.

Good software is the key to good computer graphics. The quality of the end-product — the picture or graph — is entirely shaped by the ability of the software to help you deliver an appropriate image.

Graphics software packages are a major growth area of the industry. They are available for mainframes, minis and micros. But people in the mid-range of quite expensive stand-alone mini-based systems may well find themselves in a sort of no-man's land within a few years.

Mainframe software is so powerful that once you have seen the results you will fnd it hard to settle for anything else. Neither is it strictly true, as some stand-alone suppliers claim, that graphics packages tie up mainframe resources at the expense of other applications. At the lower end of the market, as micros become more powerful very sophisticated software is being written for them.

The big breakthrough in software packages has been the improvement in

Business graphics systems

Apple Business Graphics
Turns data into graphs. Telephone Apple, Hemel Hempstead (0442) 60244.

Apple Lisa
Hard disc-based personal micro with powerful integrated graphing capabilities provided by LisaGraph. Telephone Apple, Hemel Hempstead (0442) 60244.

Bit-Stik
Built around a graphics joystick with X, Y and Z directions, links to an Apple II. Telephone Robocom, 01-263 3388.

Boxer
A three-dimensional solid-modelling facility which works in conjunction with DOGS, a geometric-modelling Drawing Office Graphics System, originally developed at the University of Leeds. Telephone Pafec, Nottingham (0602) 292291.

BFS Business Graphics
In effect a word processor for business graphics, it interfaces to most popular printers and plotters and runs on the IBM PC. Imported from Cambridge, Massachusetts by Pete & Pam Computers. Telephone: Rossendale (0706) 227011.

Context MBA
Powerful spreadsheet with limited text entry, database and graphics facilities integrated together. Available for the IBM PC and Hewlett Packard Series 200

Model 16. Telephone The Software Rental Bank, Leighton Buzzard (0525) 373440, or Hewlett Packard (0344) 773100.

Dataplot
Business graphics package which can interface to the Supercalc spreadsheet and to Graphtext, a word-slide generating package. Runs under CP/M and MP/M. Contact Grafox, Oxford (0865) 242597.

dGraph
Versatile business graphics package which entails minimum programming and interfaces with Ashton Tate's dBase II. Telephone Fox & Geller, 01-580 5816.

Dicomed
Computer-based high-resolution colour-slide design system aimed at audio-visual producers, Dicomed copes with text, electronic drawing, digitising and freehand drawing. Eidographics then produces the final slides from your floppy discs. Contact Eidographics Ltd, 47 Marylebone Lane, London W1. Telephone: 01-486 9479.

Graforth
All-singing all-dancing graphics package written in Forth, includes a built-in music synthesizer. Telephone SBD Software, 01-948 0461.

Graphics Toolkit
Business graphics package for the ACT Sirius, interfaces with Supercalc. Telephone ACT, 021-501 2284.

Graph It
Simple graph-drawing package for Atari micros. Telephone Atari, Slough (0753) 33344.

Graphkit
Graph plotting, curve fitting and statistical analysis package for Commodore Pets. Telephone Commodore Information Centre, Slough (0753) 79292.

Graph'n'Calc
Graph-drawing program with its own modest spreadsheet, for the IBM PC. Imported from Santa Cruz, California by Pete & Pam. Telephone: Rossendale (0706) 227011.

Lotus 1-2-3
Spreadsheet with a powerful graphic extension built in. Telephone Planning Consultancy, 01-839 3143.

Peachtree Graphics Language
Interactive graphics programming language which runs under CP/M and MP/M, and interfaces to Peachcalc/Magicalc and Peachtext/Magic Wand. Telephone Peachtree, Maidenhead (0628) 32711.

Perq
Amazing mouse-driven graphics system for draughting and CAD/CAM applications. Telephone ICL, Infopoint, 01-788 7272.

P L Graphics
Digitising and drawing system based on the BBC Model B and suitable for schools and small businesses. Telephone B S Dollamore, Burton-on-Trent (0283) 217905.

StarGraphics II
35mm. colour-slide design system based on the Apple II micro. Myriad produce the final slides from your discs. Contact Myriad, 106 Hampstead Road, London NW1, Telephone: 01-380 0191.

Sub-Logic Graphics Package
For displaying three dimensional scenes on a two dimensional display. Telephone Pete & Pam, Rossendale (0706) 227011.

Utopia Graphics Table System
Provides 64 colours, 40 brush shades and pen-controlled editing.

Vectrix VX Series
CAD/CAM and business graphics system which includes NEC chips and an Intel 8088, and links to various personal computers including the IBM PC, Sirius, Osborne and Hewlett Packard and Apple. The VX-384 can display up to 512 colours from a palette of 16.8 million. Imported from Greensboro, North Carolina by Sintrom Electronics. Telephone: Reading (0734) 875464.

VisiTrend/Plot
Converts data from VisiCalc and other Visi products into business graphics. Telephone Rapid Recall, (0494) 38525.

user-friendliness. This is a marketing breakthrough because the people who really need graphics are rarely skilled in computing. Yet the most sucessful cases of business graphics implementation have been where hundreds and even thousands of company employees have been trained to operate a system. No longer is computer graphics an arcane and mysterious art. The new techniques are available to everyone.

First-rate graphics software is now almost affordable by everyone. VisiPlot, to run on an Apple computer, is priced at around £177. At these rates, the use of computer graphics will become almost universal in small businesses and perhaps even in the home.

Word processors can be converted into graphics workstations with the addition of appropriate software. Writing a software package, however, requires highly-skilled programmers.The business graphics packages offered by Apple Computers took 200 man-years to develop — and woman-years no doubt.

The academic interest in artificial intelligence is influencing new approaches to computer graphics. Eventually even the most advanced scientific thought reaches the businessman in one form or another. One phenomenon of particular interest to students of artificial intelligence is pattern recognition. We do not fully understand why or how we instantly recognise, say, the face of a friend in a crowd of people, when everyone in the crowd has two eyes, two ears and a nose in approximately the same places. It prompts the question, can patterns be generated and developed to help the businessman recognise the friendly face of his sales statistics?

Over the past decade we have survived a blitz of multi-image shows which have helped pave the way for an appreciation of pattern recognition as a business tool. Today's incredible growth of computer graphics is both a symptom and a cause of this new development of human skills.

Business graphics

Our world's economy, depicted in colourful business graphics, looks pretty unhealthy. Today you can see all those complex statistics at a glance, arranged for you by the computer in graphic format. Gone is the time when economists could pretend to be deaf when asked which way the wind was blowing. But if charts and graphs show us a sorry picture of the world recession at least the world of business graphics is booming, at a rate of around 70 percent a year.

Graphics Software, Inc., an Oregon-based business graphics company, makes a startling claim, "Mainframe quality graphics can now be replicated on your mini/microcomputer." The claim will bear scrutiny providing you read it carefully. The company is not suggesting that an Apple II can perform the same service as a big mainframe complete with Tell-a-Graf software. Rather, it is saying that its product, GSS Plot, will lift micro graphics to a new level of flexibility. The software will run on most mini and microcomputers, and it is fully device independent in regard to CRTs and plotters.

This particular software package has been designed specifically for applications software developers. GSS Plot contains all the necessary computer instructions to prepare presentation quality line graphs, bar charts, scatter charts and other types of display. For example, a user need call only four related sub-routines and supply 13 parameters in order to generate a complex pie chart. Without the GSS Plot subroutines you would have to write a 100 lines of code and make all the necessary tests before being able to generate similar graphics.

Since CP/M has become the favoured operating system of most personal-computer manufacturers, GSS has signed a deal with the CP/M originators, Digital Research Inc., and now offers GSS Plot in CP/M compatible form. This co-operation could have a significant impact on the future of business graphics,

(continued on next page)

Multi-million dollar industry

(continued from previous page)

enabling micro users to add a true graphics capability to their machines. Tom Clarkson, president of GSS, says that the agreement, "will significantly assist our ability to make standardised graphics software available to micro and minicomputer users."

Another company to watch in this field is Graphic Communications Inc., of Waltham, Massachusetts. Its President, Randall E Wise, is a strong believer in what he calls the software solution. He says, "There are hardware solutions to stand-alone graphics and there are software solutions to stand-alone graphics. We have chosen the software solution, currently operating on the HP-8587. That concept works on an IBM Personal Computer as an application. And powerful 16-bit computers are coming along with very good software, which can very nearly duplicate the capabilities that other stand-alone systems are offering with their hardware solutions".

Special hardware is always more expensive than general-purpose software. Randall Wise suggests that the companies who are offering expensive hardware for business graphics will find themselves fighting a losing battle on prices. "I don't know how they are going to react to the new software that will duplicate their capability for a few thousand dollars."

Business graphics are often required in slide or overhead transparency format. Polaroid instant film technology has made a big impact on this market with several manufacturers incorporating instant film cameras in their systems. Polaroid has several products, in particular, the Videoprinters Models 4 and 8. "We can now bridge the gap between electronics and film," says James Hartnett, Marketing Manager of Polaroid's Professional Film Products Division. "Previously, film had not been appropriately matched in phosphor response to proper exposures of red, green, or blue levels. In the Model 8 it is possible to optimise the two — and get the best result."

The Model 8 Videoprinter is a microprocessor-controlled display-driven device, producing 8in. by 10in. instant colour overhead transparencies. "It is very state-of-the-art in digital input and information gathering," says Hartnett. The Model 4 is intended for 4 by 5 formats and smaller, including the new instant-process 35mm. film that Polaroid is launching later in 1982.

One of the first micro-based graphics systems came from Cromemco, a company that is better known for its CAD/CAM hardware. The Z-2H graphics system is based on the Z-80 chip, and has recently been upgraded to include the Motorola 68000. This allows the display of a 1,000 by 1,000 matrix, putting it just into the high-resolution bracket. Cromemco has supported its system with two software packages, Slidemaster and Fontmaster. With Slidemaster and a graphics tablet a user can choose from 75 design functions that are displayed on both screen and tablet menus. The package is intended for presentation graphics, and includes a carousel mode that allows you to call up an image sequence as though you were controlling a slide projector. Fontmaster lets you design your own lettering or special characters such as scientific notation.

Excellent software for both the Apple II and III has been developed by Business and Professional Software of Cambridge, Massachusetts. Recent packages from this company, marketed by Apple themselves, go beyond the presentation graphics of its earlier software. The two-diskette package, now called Apple Business Graphics, allows you to create colour graphic representations of data using English language commands. For instance, sales projection data can be retrieved from a VisiCalc program and automatically displayed as bar, line or pie charts.

Like the Cromemco system, the Apple Business Graphics package can make the computer function like a slide projector. It requires the addition of a new product called Screen Director, two diskettes that come with a Kodak hand-held projector controller, which plugs into the game-slot on the Apple. David Solomont, President of BPS, says, "Apple Business Graphics allows the user to create and store graphic images. Screen Director retrieves and displays them on video monitors for presentation." It also lets you create hard copies of a whole tray of images on many brands of dot matrix printer, including the IDS Paper Tigers, Anadex 9000s, Epson MX line and Apple Silentype. The IDS Prism will produce hard copy in colour.

With the low cost of Apple software and the relatively high cost of colour slide-making systems an attractive solution is to make use of a hard-copy bureau service. Comshare has tried out its Target Image Maker on the Apple. Users of the system would be able to create charts on their in-house computer and then download them to a Comshare facility for production of the slides. At this point the Post Office takes over, the postman brings you the slides in the mail. Perhaps this deflates some of the high-tech magic that surrounds the creation of electronic images, but it is also the thinking behind the Cornerstone/Clear Light Stargraphics operation.

The Apple Business Graphics package makes the computer function like a slide projector.

If business graphics becomes as simple and as inexpensive as many experts predict, we shall be knee-deep in graphs and charts before the decade is over. Manufacturers are already treating the subject as though images will be manipulated with the ease of words in word-processing. Another name will have to be found for this technique, since image processing means something quite different — image enhancement.

Hinting at the shape of the office of the future, Hewlett-Packard can now proudly show off its Merged Text and Graphics system. This will actually produce illustrated business correspondence, among other applications. Perhaps we shall eventually be able to dispense with words altogether and communicate with each other entirely in pictures. This, of course, will only deepen the world recession. The left side of our brains will be redundant, while the right side will be on strike — demanding extra pay for extra work.

It's our service!

Whether your applications involve simple financial procedures or complicated R & D Graphics (or a myriad of techniques in between) KGB have the system for you.

With the right software packages to go with it. And all at sensible competitive prices.

But we go further still. We can help with finance and leasing. We provide sound system training. And comprehensive maintenance.

So send for our literature. Have a look at the KGB service – and find out how you can win Game, Set and Match!

Micros for the Business, Commercial and Technical user – Stand Alone and Multi-user Systems.

KGB

word processing + accountancy + financial modelling + calculation + record keeping + sales office management + accounts + payroll + graphics + engineering + communications + languages + solicitors + CAD

MICROS LIMITED

106 St Leonards Road Windsor Berkshire SL4 3DD
Telephone: Windsor 50111 Telex: 23152 MONREF G (Ref 8542)

● Circle No. 167

Geometrical

THE STANDARD METHOD of plotting lines on computer-graphics sytems is very similar to the way a pen and paper is used.

The main difference is that the computer is a comparatively simple machine and can normally only draw straight lines. To draw a circle, for example, the computer has to divide the curve up into short straight-line segments which it then plots individually.

Even drawing lines requires a lot of software. Anything less straightforward calls for a library of routines. Often the programmer must start from scratch using only a basic line-plotting routine supplied with the system.

The listing provides a library of useful plotting routines written in Basic which should run on any machine. Only one routine needs to be written to interface the library with most line-plotting systems, and usually it only needs to be a line or two in length.

The interface routine is at line 1000 and is used by all the other plotting routines in the library. It moves the cursor from the current position to a new position specified with a pair of X,Y co-ordinates in the parameters. A third parameter is used to specify the mode in which the cursor is to be moved. If it is zero the cursor is simply moved to the new position. If it is non-zero a line is also drawn from the old to the new position. The value of the parameter may be used to specify the colour and/or intensity of the line to be drawn.

In the library it is assumed that only one colour is available for the line drawing. You could use a global variable to specify the colour to be used for plotting if your system allows it. The routine at line 1000 must then use this variable to plot the correct colour.

All the routines, apart from the basic plotting routine and the conversion routines, need to be supplied with a starting position offset X0 and Y0 from which plotting will commence. The variables T0 to T9 may be corrupted by the library routines and thus should not be used to hold global values.

None of the routines in the library contain line-number references using Goto or Gosub statements, apart from line 1000 for the basic line-plotting routine. You can easily relocate the code to different line numbers, if you wish, without changing the code itself, provided the Plot routine is on line 1000.

The library should be stored as a single file. When a new program which uses some of the library routines is to be written, the library itself should first be loaded. Unused routines may be deleted and the program typed in on the keyboard. The program and library routines may then be renumbered as required before being saved as another file.

Interface routine

Plot, line 1000. Plots from current position to new position. The only routine in the library which needs to be written for a specific system. Most of the other routines in the library call this routine. Input parameters are:

X — X co-ordinate of new position
Y — Y co-ordinate of new position
M — mode of plot; 0 to move without drawing line, 1 to draw line to new position

Line-plotting routines

Draw, line 1100. Draws a line between two positions. Useful when the two end co-ordinates of the line are known and the current position of the cursor is at neither of them. Input parameters are:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L1 — finishing X co-ordinate
L2 — finishing Y co-ordinate

Line, line 1200. Draws a line from a position. Should be used when the starting co-ordinates and the relative position of the finishing co-ordinates are known. Input parameters are:

X0 — starting X co-ordinate
Y0 — starting y co-ordinate
L1 — increment in X direction for final position
L2 — increment in Y direction for final position

Radius, line 1300. Draws radius of a circle. Useful when the angle and the length of the lines are known rather than the X,Y co-ordinates of the end of the line. Input parameters are:

X0 — starting X co-ordinate

Geometrical plotting.

```
1000 REM "PLOT",X,Y,M
1010 REM
1020 REM (C) J.P.BOWEN, OCTOBER 1982
1030 REM
1040 REM ************************
1050 REM * Machine dependent code *
1060 REM ************************
1070 REM
1080 REM
1090 RETURN
1100 REM "DRAW",X0,Y0,L1,L2
1110 M=0
1120 X=X0
1130 Y=Y0
1140 GOSUB 1000
1150 M=1
1160 X=L1
1170 Y=L2
1180 GOSUB 1000
1190 RETURN
1200 REM "LINE",X0,Y0,L1,L2
1210 M=0
1220 X=X0
1230 Y=Y0
1240 GOSUB 1000
1250 M=1
1260 X=X0+L1
1270 Y=Y0+L2
1280 GOSUB 1000
1290 RETURN
1300 REM "RADIUS",X0,Y0,L,A
1310 T0=A*PI/180
1320 M=0
1330 X=X0
1340 Y=Y0
1350 GOSUB 1000
1360 M=1
1370 X=X0+L*COS(T0)
1380 Y=Y0+L*SIN(T0)
1390 GOSUB 1000
1400 RETURN
1410 REM "FIGURE",X0,Y0,L1,L2,N1,N2,
     X(?),Y(?)
1420 M=0
1430 X=X0+L1*X(N1)
1440 Y=Y0+L2*Y(N1)
1450 GOSUB 1000
1460 M=1
1470 FOR T0=N1+1 TO N2
1480 X=X0+L1*X(T0)
1490 Y=Y0+L2*Y(T0)
1500 GOSUB 1000
1510 NEXT T0
1520 RETURN
1530 REM "POLYGON",X0,Y0,L,A,N,N1
1540 T0=A*PI/180
1550 T1=2*PI/N1
1560 M=0
1570 X=X0
1580 Y=Y0
1590 GOSUB 1000
1600 M=1
1610 FOR T2=1 TO N
1620 X=X+L*COS(T0)
1630 Y=Y+L*SIN(T0)
1640 T0=T0+T1
1650 GOSUB 1000
1660 NEXT T2
1670 IF N<N1 THEN RETURN
1680 X=X0
1690 Y=Y0
1700 GOSUB 1000
1710 RETURN
1720 REM "SQUARE",X0,Y0,L,A
1730 L1=L
1740 L2=L
1750 N=4
1760 REM "RECTANGLE",X0,Y0,L1,L2,A,N
1770 T0=A*PI/180
1780 T1=COS(T0)
1790 T2=SIN(T0)
1800 M=0
1810 X=X0
1820 Y=Y0
1830 GOSUB 1000
1840 M=1
1850 IF N<1 THEN RETURN
1860 X=X+L1*T1
1870 Y=Y+L1*T2
1880 GOSUB 1000
1890 IF N<2 THEN RETURN
1900 X=X-L2*T2
1910 Y=Y+L2*T1
1920 GOSUB 1000
1930 IF N<3 THEN RETURN
1940 X=X0-L2*T2
1950 Y=Y0+L2*T1
1960 GOSUB 1000
1970 IF N<4 THEN RETURN
1980 X=X0
1990 Y=Y0
2000 GOSUB 1000
2010 RETURN
2020 REM "TRIANGLE",X0,Y0,L1,L2,A,N
2030 T0=A*PI/180
2040 T1=COS(T0)
2050 T2=SIN(T0)
2060 M=0
2070 X=X0
```

plotting

Jonathan Bowen presents a library of versatile Basic procedures which add a graphics-handling capability to your micro.

Y0 — starting Y co-ordinate
L — length of radius
A — angle of radius

Geometrical plotting

Figure, line 1410. Draws an irregular figure. The co-ordinates of the vertices of the figure are passed as arrays in the parameters X and Y which must be set up before the routine is called. For example:

```
100 N1 = 1
110 INPUT N2
120 DIM X(N2), Y(N2)
130 FOR I = N1 to N2
140 INPUT X(I), Y(I)
150 NEXT I
160 X0 = 0
170 Y0 = 0
180 L1 = 1
190 L2 = 1
200 GOSUB 2100: REM "FIGURE"
```

The parameters N1 and N2 specify the range of the arrays to be used; in this example the entire array is used. The parameters X0, Y0, L1 and L2 may be used to offset and scale the figure. Input parameters are:

X0 — offset in the X direction
Y0 — offset in the Y direction
L1 — scaling factor in the X direction
L2 — scaling factor in the Y direction
N1 — first array subscript to be used
N2 — last array subscript to be used
X — array containing X co-ordinates
Y — array containing Y co-ordinates

Polygon, line 1530. Draws a regular polygon. As well as the number of sides of the polygon, the number of sides to be drawn is also specified. The polygon may be drawn at any angle to the horizontal. Input parameters:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L — length of side
A — angle of first side; normally zero
N — number of sides to be drawn; normally equal to N for a complete polygon
N1 — number of sides; must be three or more

Square, line 1720. Draws a square. Drops through to the rectangle routine with the correct parameters to draw a square. Input parameters are:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L — length of sides of square
A — angle of first side; normally zero for horizontal square

Rectangle, line 1760.Draws a rectangle. The size of the base and height, number of sides to be drawn and angle to the horizontal must be specified. Input parameters:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L1 — length of base of rectangle
L2 — height of rectangle
A — angle of first side; normally zero for horizontal rectangle
N — number of sides to be drawn; normally four for complete rectangle

Triangle, line 2020. Draws an isosceles triangle. The figure is drawn clockwise so that if only two sides are drawn then they are symmetrical. The angle from the horizontal may be varied. Input parameters are:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L1 — length of base of triangle
L2 — height of triange
A — angle of base
N — number of sides to be drawn; normally three for complete triangle

Circular curve plotting

Arc, line 2240. Draws a circular arc. The centre of arc and the radius must be specified, together with the starting and finishing angles from the horizontal. The number of straight-line segments needed to make up the arc is calculated automatically and then the Segment Arc routine is used. The segment number calculation assumes a plotting area of a few hundred pixels in each direciton. If this is not the case on a particular system, then the division factor — 3 in this case — may need to be altered to obtain satisfactory results. For example:

X0 — X co-ordinate of centre of arc
Y0 — Y co-ordinate of centre of arc
L — length of arc radius
A1 — starting angle
A2 — finishing angle

Segment Arc, line 2260. Draws a segmented arc of a circle. The parameters are as for the Arc subroutine

(continued on next page)

```
2080 Y=Y0
2090 GOSUB 1000
2100 M=1
2110 IF N<1 THEN RETURN
2120 X=X0+L1*T1/2-L2*T2
2130 Y=Y0+L1*T2/2+L2*T1
2140 GOSUB 1000
2150 IF N<2 THEN RETURN
2160 X=X0+L1*T1
2170 Y=Y0+L1*T2
2180 GOSUB 1000
2190 IF N<3 THEN RETURN
2200 X=X0
2210 Y=Y0
2220 GOSUB 1000
2230 RETURN
2240 REM "ARC",X0,Y0,L,A1,A2
2250 N=20+INT(L*ABS(A2-A1)/1000)
2260 REM "SEGMENT ARC",X0,Y0,L,A1,A2,N
2270 T0=A1*PI/180
2280 T1=A2*PI/180
2290 T2=(T1-T0)/N
2300 M=0
2310 X=X0+L*COS(T0)
2320 Y=Y0+L*SIN(T0)
2330 GOSUB 1000
2340 M=1
2350 FOR T3=2 TO N
2360 T0=T0+T2
2370 X=X0+L*COS(T0)
2380 Y=Y0+L*SIN(T0)
2390 GOSUB 1000
2400 NEXT T3
2410 X=X0+L*COS(T1)
2420 Y=Y0+L*SIN(T1)
2430 GOSUB 1000
2440 RETURN
2450 REM "CIRCLE",X0,Y0,L
2460 N=20+INT(L/3)
2470 REM "SEGMENT CIRCLE",X0,Y0,L,N
2480 T0=2*PI/N
2490 M=0
2500 X=X0+L
2510 Y=Y0
2520 GOSUB 1000
2530 M=1
2540 T1=0
2550 FOR T2=2 TO N
2560 T1=T1+T0
2570 X=X0+L*COS(T1)
2580 Y=Y0+L*SIN(T1)
2590 GOSUB 1000
2600 NEXT T2
2610 X=X0+L
2620 Y=Y0
2630 GOSUB 1000
2640 RETURN
2650 REM "DOT",X0,Y0
2660 X=X0
2670 Y=Y0
2680 M=0
2690 GOSUB 1000
2700 M=1
2710 GOSUB 1000
2720 RETURN
2730 REM "DOT GRID",X0,Y0,L1,L2,N1,N2
2740 T0=L1/(N1-1)
2750 T1=L2/(N2-1)
2760 Y=Y0
2770 FOR T2=1 TO N2
2780 X=X0
2790 FOR T3=1 TO N1
2800 M=0
2810 GOSUB 1000
2820 M=1
2830 GOSUB 1000
2840 X=X+T0
2850 NEXT T3
2860 Y=Y+T1
2870 NEXT T2
2880 RETURN
2890 REM "DOT LINE",X0,Y0,L,A,N
2900 T0=A*PI/180
2910 T1=L*COS(T0)/(N-1)
2920 T2=L*SIN(T0)/(N-1)
2930 X=X0
2940 Y=Y0
2950 FOR T3=1 TO N
2960 M=0
2970 GOSUB 1000
2980 M=1
2990 GOSUB 1000
3000 X=X+T1
3010 Y=Y+T2
3020 NEXT T3
3030 RETURN
3040 REM "DOTS",X0,Y0,L1,L2,N
3050 FOR T0=1 TO N
3060 X=X0+L1*RND(1)
3070 Y=Y0+L2*RND(1)
3080 M=0
3090 GOSUB 1000
3100 M=1
3110 GOSUB 1000
3120 NEXT T0
3130 RETURN
3140 REM "ARROW",X0,Y0,L,L1,A,A1,N
3150 T0=A*PI/180
3160 T1=A1*PI/180
3170 T2=X0+L*COS(T0)
3180 T3=Y0+L*SIN(T0)
```

(listing continued on next page)

(continued from previous page)
except that the number of straight-line segments in the arc must also be given:

X0 — X co-ordinate of centre of arc
Y0 — Y co-ordinate of centre of arc
L — length of arc radius
A1 — starting angle
A2 — finishing angle
N — number of segments in arc; must be 2 or more

Circle, line 2450. Draws a circle. the parameters are as for the Arc routine except that the starting and finishing angles need not be specified. The number of straight-line segments is calculated automatically before the Segment Circle routine is used. As with the Arc routine, the segment-number calculation assumes a plotting area of a few hundred pixels in each direction. If this is not the case, then the division factor — 1,080 in the library routine shown — may need to be adjusted to obtain satisfactory results. Input parameters are:

X0 — X co-ordinte of centre of circle
Y0 — Y co-ordinate of centre of circle
L — length of circle radius

Segment Circle, line 2470. Draws a segmented circle. The parameters are as for the Circle subroutine except that the number of straight-line segments to be used must also be given:

X0 — X co-ordinate of centre of circle
Y0 — Y co-ordinate of centre of circle
L — length of circle radius
N — number of straight-line segments

Dot-plotting routines

Dot, line 2650. Draws a dot. A similar calling sequence is used by the rest of the routines in this section. Input parameters:

X0 — X co-ordinate of dot
Y0 — Y co-ordinte of dot

Dot Grid, line 2730. Draws a rectangular grid of dots. The size and the number of dots in each direction must be specified. Input parameters are:

X0 — X co-ordinate of bottom left-hand corner of grid
Y0 — Y co-ordinate of bottom left-hand corner of grid
L1 — length of rectangle in X direction
L2 — length of rectangle in Y direction
N1 — number of dots in X direction; must be two or more
N2 - number of dots in Y-direction; must be two or more

Dot Line, line 2890. Draws a line of dots. The parameters are as for the Radius subroutine except that the number of dots to be plotted must also be specified:

X — X co-ordinate of start of line
Y — Y co-ordinate of start of line
L — length of line
A — angle of line
N — number of dots in the line; must be two or more

Dots, line 3040. Plots random dots in a rectangle. The number of dots must be given. The routine assumes that the function RND (1) returns a random number between 0 and 1. If not, it will need to be adjusted accordingly. Input parameters are:

X0 — X co-ordinate of bottom left-hand corner of rectange
Y0 — Y co-ordinte of bottom right-hand corner of rectange
L1 — length of rectangle in X direction
L2 — length of rectange in Y direction
N — number of dots to be plotted

General-purpose plotting

Arrow, line 3140. Draws an arrow. The length and angle of the shaft and head must be specified. The head may be either open or closed. Input parameters are:

X0 — starting X co-ordinate
Y0 — starting Y co-ordinate
L — length of shaft
L1 — length of head
A — angle of shaft
A1 — angle of head from shaft
N — 0 for open head; 1 for closed head

Dashes, line 3390. Draws a dashed line. The parameters are as for the Radius subroutine except that the number of dashes and the ratio of dash to space between the dashes must also be given:

X0 — X co-ordinate of start of line
Y0 — Y co-ordinate of start of line
L — length of line
A — angle of line
N — number of dashes
N1 — ratio of dash to space between dashes

Grid, line 3660. Draws a rectangular grid. Parameters are as for the Dot Grid routine, this time the grid is drawn with solid lines.
X0 — X co-ordinate of bottom left-hand corner of grid
Y0 — Y co-ordinate of bottom left-hand corner of grid
L1 — length of grid in X direction
L2 — length of grid in Y direction
N1 — number of divisions in X direction
N2 — number of divisions in Y direction

Hatch, line 3890. Hatches in a rectangle. The number of lines used and the angle of the hatching are specified as parameters. For horizontal lines the angle is specified as zero; 90 degrees gives vertical lines.

X0 — X co-ordinate of bottom left-hand corner of rectangle
Y0 — Y co-ordinate of bottom left-hand corner of rectangle
L1 — length of rectangle in X direction
L2 — length of rectangle in Y direction
A — angle of hatching; between 0 and 180 degrees
N — number of hatching lines

(listing continued from previous page)

```
3190 M=0
3200 X=X0
3210 Y=Y0
3220 GOSUB 1000
3230 M=1
3240 X=T2
3250 Y=T3
3260 GOSUB 1000
3270 X=T2-L1*COS(T1-T0)
3280 Y=T3+L1*SIN(T1-T0)
3290 GOSUB 1000
3300 IF N=0 THEN M=0
3310 X=T2-L1*COS(T1+T0)
3320 Y=T3-L1*SIN(T1+T0)
3330 GOSUB 1000
3340 M=1
3350 X=T2
3360 Y=T3
3370 GOSUB 1000
3380 RETURN
3390 REM "DASHES",X0,Y0,L,A,N,N1
3400 T0=A*PI/180
3410 T1=COS(T0)
3420 T2=SIN(T0)
3430 T3=L/(N*(N1+1)-1)
3440 T4=T3*T1
3450 T5=T3*T2
3460 T6=N1*T4
3470 T7=N1*T5
3480 M=0
3490 X=X0
3500 Y=Y0
3510 GOSUB 1000
3520 FOR I=1 TO N
3530 M=1
3540 X=X+T6
3550 Y=Y+T7
3560 GOSUB 1000
3570 M=0
3580 X=X+T4
3590 Y=Y+T5
3600 GOSUB 1000
3610 NEXT I
3620 X=X0+L*T1
3630 Y=Y0+L*T2
3640 GOSUB 1000
3650 RETURN
3660 REM "GRID",X0,Y0,L1,L2,N1,N2
3670 T0=L1/N1
3680 X=X0
3690 FOR T1=0 TO N1
3700 M=0
3710 Y=Y0
3720 GOSUB 1000
3730 M=1
3740 Y=Y0+L2
3750 GOSUB 1000
3760 X=X+T0
3770 NEXT T1
3780 T0=L2/N2
3790 FOR T1=0 TO N2
3800 M=0
3810 X=X0+L1
3820 GOSUB 1000
3830 M=1
3840 X=X0
3850 GOSUB 1000
3860 Y=Y-T0
3870 NEXT T1
3880 RETURN
3890 REM "HATCH",X0,Y0,L1,L2,A,N
3900 T0=N+1
3910 T1=A
3920 IF (T1<0) OR (T1>=180) THEN T1=0
3930 IF T1<>90 THEN T2=ABS(TAN(T1*PI/180))
3940 T3=L1/T0
3950 IF (T1<>0) AND (T1<>90) THEN T3=
     (L1+L2/T2)/T0
3960 IF T1<90 THEN T3=-T3
3970 IF T1<>90 THEN T4=(L1*T2+L2)/T0
3980 T5=0
3990 IF T1<>90 THEN T5=INT(L2/T4)
4000 T6=X0
4010 IF T1<90 THEN T6=X0+L1
4020 T7=X0
4030 IF T1>=90 THEN T7=X0+L1
4040 T8=Y0+L2
4050 FOR T2=1 TO N
4060 T9=T0-T2
4070 X=T6
4080 IF T2>T5 THEN X=T7-T9*T3
4090 Y=T8
4100 IF T2<=T5 THEN Y=Y0+T2*T4
4110 M=0
4120 GOSUB 1000
4130 X=T7
4140 IF T9>T5 THEN X=T6+T2*T3
4150 Y=Y0
4160 IF T9<=T5 THEN Y=T8-T9*T4
4170 M=1
4180 GOSUB 1000
4190 NEXT T2
4200 RETURN
4210 REM "PI",PI
4220 PI=4*ATN(1)
4230 RETURN
4240 REM "RADIAN",A
4250 A=A*PI/180
4260 RETURN
4270 REM "DEGREE",A
4280 A=A*180/PI
4290 RETURN
```

The Home of Microcomputer Software Brings You The Complete Information Management System

UICKCODE ™

he dBASE II Program enerator

enerate a customer atabase in 5 minutes with UICKCODE. the dBASE II rogram generator. It's that mple. Absolutely the most owerful program generator ou've ever seen. And the asiest to use.

UTIL ™

he dBASE II Utility rogram

UTIL is Fox & Geller's utility rogram for dBASE II. dUTIL ecreases the running time of BASE II command files. UTIL combines your ommand files automatici- ally to produce a faster unning time.

dBASE II ™

The Relational Database

dBASE II is what database management is all about.
It's an information-handler. not a file handler.
It's relational. not hierarchal. so you don't have to get involved with sets. lists. pointers and all the other complexities still around from the 1960's.
It's interactive so that data entry is easy.
It can be programmed so that even untrained personnel can accurately run even your most complicated applications.
It gives you full X-Y control so that input and output are done the way you want them done. even on your existing forms.
It has a full English-like language of its own so it's easy to use. with structures that make it easier to use right.
Changing. extending. modifying of databases take a few simple commands.
And the documentation is so thorough that it's almost a mini-course in database management.

dGRAPH ™

The dBASE II Graphics System

Now you can combine database and graphics. With dGRAPH by far the easiest to use graphics package in existence.
Just press one key and you've got pie charts. bar graphs. or line graphs.
Advanced features make dGRAPH as powerful as it is easy. Features like AUTOGRAPH which will **automatically** load dBASE II data. compute scales. draw grid lines. and label charts. Then there's automatic shading and overlay graphs. And more.

dGRAPH brings your database to life.
dGRAPH draws graphs on Epson. Okidata. and a growing list of other popular printers.



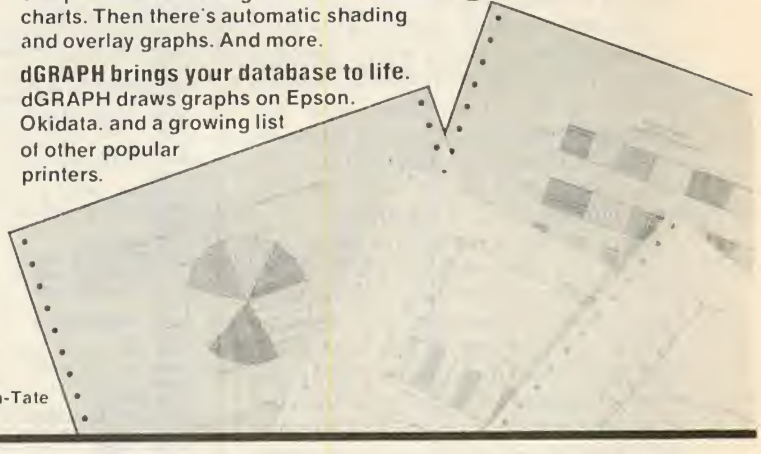

UICKCODE, dGRAPH, dUTIL, and UTOGRAPH are trademarks of Fox & Geller. dBASE II is a trademark of Ashton-Tate

MPI

MICROCOMPUTER PRODUCTS INTERNATIONAL LIMITED

THE HOME OF MICROCOMPUTER SOFTWARE

Central House,
Cambridge Road,
Barking,
Essex IG11 8NT.

Tel: 01-591 6511
Telex: 892395

★ *See us at the P.C.W. Exhibition on Stand 120* ★

● Circle No. 168

Colouring blocks

Many shapes are difficult to fill using the BBC Micro's triangle-drawing facility. John Dallman explores the possibilities offered by the new BBC ROM.

ONE OF THE FEW serious gaps in the graphics abilities of the BBC Micro was, until recently, the lack of a general-purpose facility for producing solid blocks of colour. While the built-in triangle-drawing facility is very useful, many shapes cannot easily be produced from triangles.

It is sometimes useful to be able to fill in a shape which has been drawn, but whose boundaries are not known in a convenient form for the triangle-filling routines. Many kinds of graphs, shapes sketched by hand on the screen using a light-pen and landscapes for games are all difficult to fill using triangles.

What was needed was an intelligent graphics routine that could be given a starting point inside any closed shape and then fill it with a specified colour. Some microcomputers already have software which will do this job.

Now Acorn Computers has announced that some extra area-filling routines have been added to the BBC operating system. At first sight, they do not seem very impressive but a closer inspection shows that they are the basic operations for a very powerful algorithm which is well adapted to small systems.

The new operating system calls fill a horizontal row of pixels with a specified colour. They are implemented as two new groups of Plot operations, and may therefore be used directly from Basic. An additional Osword enquiry call has also been added, and can be accessed from Basic through the Call statement.

The techniques based on these new routines will only work on a BBC Micro with a Series 1 operating system ROM fitted. Owners of machines with the earlier version will find new ROMs available at BBC dealers and through the Beebug user group. The recursive techniques described by listing 3 will work on any BBC machine and, with modifications, on any system that allows recursive programming.

The new Plot routines are available from Basic with the statement

PLOT K,X,Y

where K is the Plot option — 72 to 79 in this case — and X and Y are the co-ordinates of a point on the screen. When used, these routines start at the pixel specified by X and Y and search leftwards and rightwards along the same row for a pixel not in the current background colour.

The search stops when it reaches the left-most and right-most pixels that can be reached from the starting point without crossing any pixel not set to the background colour.

The system variables holding the last two positions of the graphics cursor are then set to the co-ordinates of these points, and a line is drawn between them. Table 1 shows the exact meanings of X and K and the types of line drawn for different Plot options.

Plot options 88 to 95 work in a similar way but expect to be given a starting point not set to the background colour. These commands search for the last point that is not set to the background colour, moving away from the starting point. This point and the starting point are used as the new values for the last two cursor positions and a line may be drawn between them. Table 2 gives details of the individual commands.

In listing 1 a square is drawn and then filled in using Plot 77. A line is then drawn in the background colour, and an area to the left of it is filled in with a different colour. The program uses mode 5 so that individual pixels are clearly visible on the screen.

The Step 4 statements in lines 230 and 430 are important. The area-filling routines work in terms of physical pixels on the screen when searching, not 1,280-by-1,024 set of users co-ordinates. On the BBC Micro, there are only 256 pixels on the vertical axis of the screen, so the Step 4 prevents duplication of and operation after a row has been filled.

The routines work strictly in terms of logical colours and ignore any alterations of the default colours by VDU 19 statements. If you happen to have two logical colours set to the same physical colour and are using one of them as the background colour the routines will be able to tell the difference even though none is visible on the screen.

Selecting a new background colour with the GCol statement will not change the background until the screen is cleared. However, any of these new Plot statements used between selecting a new background colour and clearing the screen will treat the newly selected value as the background colour when deciding if a given pixel is set to the background colour or not.

The new operating-system call has the form

OSWORD 13 (&OD)

It is used as an enquiry call, returning the

Listing 1.

```
 10 REM  Program 1 - demonstration
 20 REM  of new BBC PLOT routines
 30 REM  in MOS 1.2.
 40 REM  By J.G.Dallman, June 1983.
 50
 60 MODE 5
 70
 80 REM  Draw a shape to be filled in:
 90 REM  a square 400 * 400, centered
100 REM  at 600,500.
110
120 MOVE 400,300
130 DRAW 800,300
140 DRAW 800,700
150 DRAW 400,700
160 DRAW 400,300
170
180 PROCpause(10)
190
200 REM  Fill the square in in yellow.
210
220 GCOL0,2
230 FOR Y% = 300 TO 700 STEP 4
240   PLOT 77,600,Y%
250   NEXT
260
270 PROCpause(10)
280
290 REM  Draw a line in the back-
300 REM  ground colour(black).
310
320 GCOL0,0
330 MOVE 600,400
340 DRAW 750,500
350 DRAW 600,600
360
370 PROCpause(10)
380
390 REM  Fill rightwards to that line,
400 REM  in red.
410
420 GCOL0,1
430 FOR Y% = 400 TO 600 STEP 4
440   PLOT 93,500,Y%
450   NEXT
460 END
470 DEF PROCpause(secs)
480 REM  Wait for 'secs' seconds.
490 LOCAL t
500 t = TIME
510 REPEAT
520   UNTIL TIME > t + 100*secs
530 ENDPROC
```

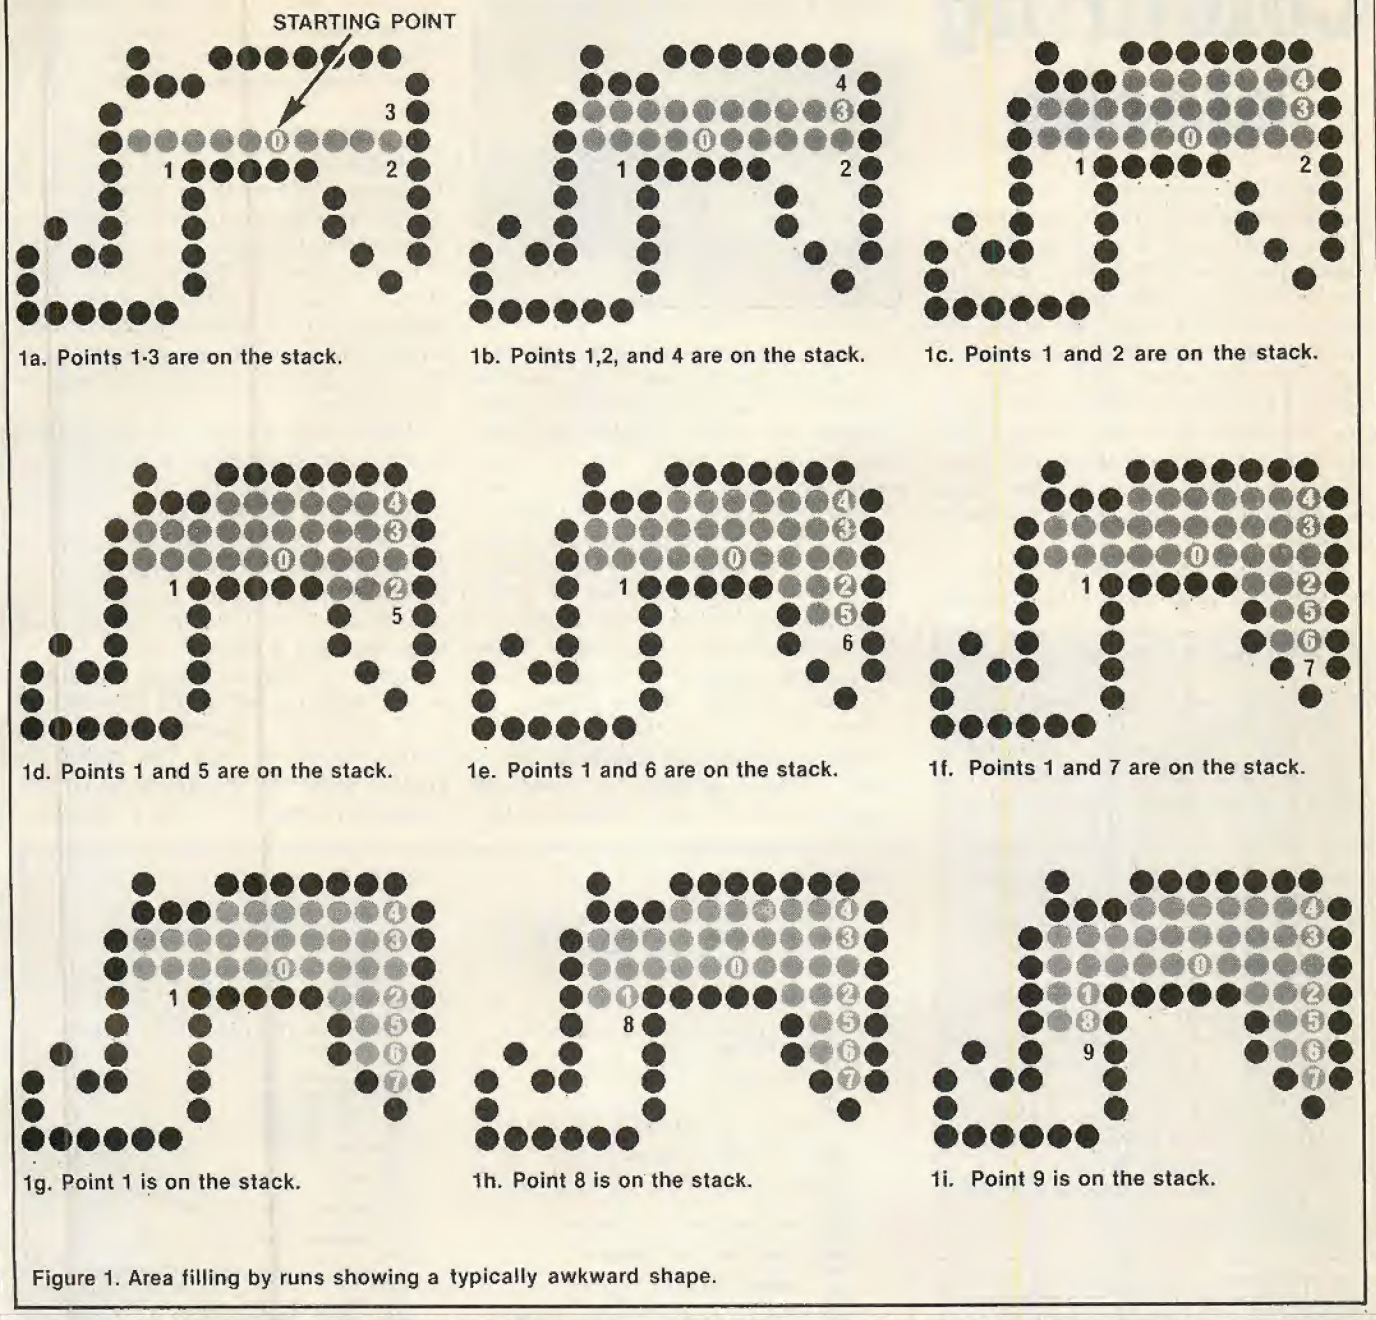

1a. Points 1-3 are on the stack.

1b. Points 1,2, and 4 are on the stack.

1c. Points 1 and 2 are on the stack.

1d. Points 1 and 5 are on the stack.

1e. Points 1 and 6 are on the stack.

1f. Points 1 and 7 are on the stack.

1g. Point 1 is on the stack.

1h. Point 8 is on the stack.

1i. Point 9 is on the stack.

Figure 1. Area filling by runs showing a typically awkward shape.

last two positions of the graphics cursor in user co-ordinates as four 16-bit binary values in an eight-byte control block that may be located anywhere in user RAM. Details of the layout of this block are given in table 3. The routine is entered at &FF1 and is restored through &020C.

Listing 2 contains a procedure called Proclocate, which may be used in other programs: a compressed version of it is used in listing 4. The procedure returns the co-ordinates as four integer variables, x1%, x2%, y1% and Y2%. The values of x1% and y1% correspond to the X and Y co-ordinates of the last position of the graphics cursor: x2% and y2% do the same for the last-but-one position. When used with either of the two new groups of Plot commands, x1%,y1'% will be the co-ordinates of the right-most of the two points set, and x2%,y2% will be the left-most point.

The values returned by Osword 13 will always be rounded down to a multiple of the number of logical points, in user co-ordinates, in a pixel. They are stored within the operating-system RAM as addresses in terms of pixels, and are only converted back to user co-ordinates when requested by Osword 13. The conversion includes any resetting of the graphics origin that may have been performed by a VDU 29 call, and the returned values will always describe the pixel in which the orignally plotted point lay.

Listing 2 simply draws a line to a random position on the screen and prints the positions read back by Osword 13 on each time round the main loop. Of course, the last-x and last-y values at any time will shift to being the last-but-one-x and last-but-one-y values on the next loop of the program.

When you want to fill an area of the screen you are confronted with an area of pixels in a background colour, surrounded by a border of pixels in some other colour, possibly more than one. This border may be only one pixel wide, but may be more. It can be very irregular, with lumps forming a significant portion of the area to be filled. Figure 1 shows a typically awkward shape.

A filling algorithm must examine the pixels surrounding the filled area and fill in those that are in the background colour. The simplest technique for doing this is shown in listing 3. It embodies a simple recursive algorithm which will fill any area provided that all the pixels belonging to it share at least one edge with another member.

Such an area is known as a four-connected area, as opposed to the eight-connected type of area where two pixels

(continued on next page)

Colouring blocks

(continued from previous page)
are considered to be part of the same area if they simply touch at a corner. Figure 2 shows examples of both kinds of area. The line-drawing algorithms used on the BBC Micro make four connected areas and would allow an algorithm intended to fill eight-connected areas to leak through any diagonal line. I will confine this article to four-connected areas, but you can find more about eight-connected areas in Foley and Van Dam's quite excellent book *Fundamentals of Interactive Computer Graphics*.

When you try out program 3 on any but the smallest target areas the recursive algorithm runs out of memory even with the minimal memory used by the mode 4 graphics screen and the trivialy short main program. For small, complex areas this program can be useful, but it is not adequate for large areas with the amount of memory available in a non-professional system. The recursive procedure PROcec flood is called about 4*n + 2*m times where n is the total number of pixels within the area and m is the number of pixels within the border of the shape. Each call requires memory to hold the two parameters and the return address, so memory runs out pretty fast.

What is needed is an algorithm that is rather logically complex but uses no recursion at all. The new routines are the fundamental operations for using this algorithm, and it is surprising that Acorn did not finish the job and add a full area-filling routine. Perhaps it will be included in the Graphics Extension ROM, when it appears.

A workable version can still be implemented in Basic, and appears in Program 4. It runs in horizontal rows of pixels within the area to be filled, ending in a boundary of the area at each end. While it is not recursive, the procedure uses a stack on which the positions of the right-hand ends of all earlier unfilled runs are stored. The program uses separate stacks for the X and Y co-ordinates for the sake of simplicity.

When a run is filled, the space above and below it is searched for unfilled runs, and stacks the co-ordinates of the right-hand ends of any unfilled runs it finds. The search uses both the new groups of Plot commands. The co-ordinates of the points to be stacked are found using the new Osword call, and the routine ends when the stack is empty.

Figure 1 illustrates how the search works. Relative co-ordinate Plot calls are used with the variable dx% because neither group of calls can move the graphics cursor off the area of colour that it started in, but only up to a boundary.

Table 1. Effect of Plot options 72 to 79.

72 — X and Y are relative co-ordinates; no line is drawn.
73 — X and Y are relative co-ordinates; a line is drawn between the two points in the current graphics foreground colour and action
74 — X and Y are relative co-ordinates; a line is drawn in the logical inverse of the current foreground colour
75 — X and Y are relative co-ordinates; a line is drawn in the current graphics background colour
76 — X and Y are absolute co-ordinates; no line is drawn
77 — X and Y are absolute co-ordinates; a line is drawn in the current foreground colour and action
78 — X and Y are absolute co-ordinates; a line is drawn in the inverse of the current foreground colour.
79 — X and Y are absolute co-ordinates; a line is drawn in the current background colour.

Table 2. Effect of Plot options 88 to 95.

88 — X and Y are relative co-ordinates; no line is drawn
89 — X and Y are relative co-ordinates; a line is drawn in the current foreground graphics colour and action
90 — X and Y are relative co-ordinates; a line is drawn in the inverse of the current foreground colour
91 — X and Y are relative co-ordinates; a line is drawn in the current background colour
92 — X and Y are absolute co-ordinates; no line is drawn
93 — X and Y are absolute co-ordinates; a line is drawn in the current foreground colour and action
94 — X and Y are absolute co-ordinates; a line is drawn in the inverse of the current foreground colour
95 — X and Y are absolute co-ordinates, a line is drawn in the current background colour

Table 3. Control block for Osword 13

00,01 — x co-ordinate of last-but-one position of the grahics cursor, x2%
02,03 — y co-ordinate of last-but-one position of the graphics cursor, y2%
04,05 — x co-ordinate of the last position of the graphics cursor, x1%
06,08 — y co-ordinate of the last position of the graphics cursoe, y1%
To locate 00 in the central block the routine is entered at &FF1 and is vectored through &0206.

Listing 2.

```
   10 REM Program 2
   20 REM Demonstrates use of OSWORD 13
   30 REM by DRAWing to random locations
   40 REM on the screen, and then print-
   50 REM ing them out
   60
   70 MODE4
   71
   72 REM Alocate perameter space for
   73 REM OSWORD call.
   74
   75 DIM cords 7
   76
   80
   90 REM Set text window
   95
  100 VDU 28, 0, 4, 39, 0
  110
  120 REPEAT
  121
  122   REM Main loop of program
  130
  140   DRAW RND(1279),RND(864)
  145
  150   PROClocate
  155
  160   PRINT'" Last x              "x1%
  170   PRINT" Last y              "y1%
  180   PRINT" Last-but-one x     "x2%
  190   PRINT" Last-but-one y     "y2%
  195
  200   PRINT"Press SPACE to continue";
  201
  202   REPEAT
  203     UNTIL INKEY(-99)
  205
  210   UNTIL FALSE
  220
 5000 END
10000 DEFPROClocate
10005
10010 REM  Reads last position of the
10020 REM  graphics cursor into x1%,y1%
10030 REM  and the last-but-one position
10040 REM  into x2%,y2%.
10050
10060 A%=13
10070 X%=cords MOD 256
10080 Y%=cords DIV 256
10090
10100 CALL&FFF1
10110
10120 xyo%=cords!0
10130 xyn%=cords!4
10140
10150 x1% = xyn% MOD &10000
10160 y1% = xyn% DIV &10000
10170 x2% = xyo% MOD &10000
10180 y2% = xyo% DIV &10000
10190
10200 ENDPROC
```

Listing 3.

```
   10 REM  Program 3
   20 REM  Demonstration of simple
   30 REM  recursive area filling.
   40 REM
   50 REM  J.G.Dallman, June 1983.
   60 REM
   70 MODE4
   80 REM
   90 REM  Draw a small, simple shape
  100 REM  to fill.
  110
  120 MOVE 600,500
  130 DRAW 650,500
  140 DRAW 650,550
  150 DRAW 600,550
  160 DRAW 600,500
  170
  180 REM And fill it in..
  190
  200 PROCrec_flood(625,525)
  210
  220 REM Wait for user
  230
  240 PRINT'"Press SPACE to contiue"
  250
  260 REPEAT
  270   UNTIL INKEY(-99)
  280
  290 REM Draw a larger shape
  300
  310 CLS
  320
  330 MOVE 300,300
  340 DRAW 700,300
  350 DRAW 500,700
  360 DRAW 300,300
  370
  380 REM And fill it in - or try...
  390
  400 PROCrec_flood(500,500)
  410
  420 END
  430 DEF PROCrec_flood(x,y)
  440
  450 REM Have we reached the edge of
  460 REM the shape ?
  470
  480 IF POINT(x,y) > 0 THEN GOTO 600
  490
  500 REM We haven't, so fill it in
  510
  520 PLOT 69,x,y
  530
  540 REM And try the points arround it
  550
  560 PROCrec_flood(x-4,y)
  570 PROCrec_flood(x+4,y)
  580 PROCrec_flood(x,y-4)
  590 PROCrec_flood(x,y+4)
  600 ENDPROC
```

The variable dx% is set to the horizontal size of a pixel in the current screen mode by FNhorstep so that the move over the boundary can be performed reliably.

Very little stack space is used by this technique, except for areas that branch out into many small ones. A machine-code version should therefore be quite practical, even given the restricted stack space available on the Micro's 6502 microprocessor. The new Plot routines are not very fast, and an instantaneous fill seems impossible. Taking Rem lines out of the Basic version and using multi-statement lines can speed it up about 30 percent, although that is still rather slow for use within applications programs.

It is possible to extend the filling technique to fill areas of foreground colour, and to change the colour of ready-filled areas. More details can be found in A R Smith's article, Tint Fill, in *Computer Graphics,* August 1979. Acorn's routines in their current form may not allow all the possible extensions. In that case disassembly of the relevant sections of the operating-system ROM should give a good idea of how to write additional routines along the same lines.

Figure 2. Four- and eight-connected area.

2a. Four-connected areas.

2b. Eight-connected areas.

Listing 4.

```
10 REM Program 4 -
20 REM Demonstration of non-recurs-
30 REM ive area filling.
40 REM
50 REM J.G.Dallman, June 1983.
60 REM
70
80 MODE4
90
100 REM Dimension perameter block for
110 REM PROClocate.
120
130 DIM cords 7
140
150 REM Dimension arrays for software
160 REM stacks.
170
180 DIM sx%(128),sy%(128)
190
200 SPMAX = 0
210
220
230 REM Draw a large, complex shape
240 REM to fill.
250
260 MOVE 200,200
270 DRAW 250,450
280 DRAW 500,100
290 DRAW 1000,270
300 DRAW 1100,0
310 DRAW 1200,800
320 DRAW 1100,250
330 DRAW 500,500
340 DRAW 400,400
350 DRAW 200,500
360 DRAW 200,200
370
380
390 REM Fill in the shape
400
410 PROCflood(450,300,1)
420
430
440 REM Print maxium value of software
450 REM stack pointer.
460
470 PRINT''"SPMAX = "; SPMAX
480
490 END
500
510
520 DEF PROCflood(X,Y,tint)
530
540 REM Initialise variables.
550
560 stackptr% = 0:dx% = FNhorstep
570 stacktopx% = -1:stacktopy% = -1
580
590 REM Set colour for filling.
600
610 GCOL 0,tint
620
630 REM Push starting co-ordinates
640 REM for first time round loop.
650
660 PROCpush(X,Y)
670
680
690 REM Main loop of procedure
700
710 REPEAT
720
730   REM Pop starting co-ordinates
740   REM off software stacks.
750
760   PROCpop
770
780   REM Fill across this y-co-ordinate.
790
800   PLOT77,stacktopx%,stacktopy%
810
820   REM Locate points and set up the
830   REM **base% variables.
840
850   PROClocate
860
870   x1base%=x2%:y1base%=y2%
880   xrbase%=x1%:yrbase%=y1%
890
900
910   REM screen & try to fill the line
920   REM above the current one.
930
940   IF POINT(x1base%,y1base%-4)<>-1 THEN
      PROCsearch(-4)
950   IF POINT(x1base%,y1base%+4)<>-1 THEN
      PROCsearch(4)
960
970   UNTIL stackptr%=0
980
990 REM We've run out of lines to fill
1000
1010 ENDPROC
1020
1030
1040
1050 DEF PROCsearch(dy%)
1060
1070 REM Searches for unfilled runs on
1080 REM the line above or below the
1090 REM current one.
1100
1110 LOCAL x%,y%
1120
1130 REM We have started above/below a
1140 REM point that can be lit or not -
1150 REM this handles that case.
1160
1170 IF POINT(x1base%,y1base%+dy%)=0 THEN
     PLOT76,x1base%,y1base%+dy% ELSE PLOT9
     2,x1base%,y1base%+dy%:PLOT72,dx%,0
      1180
1190 REM Locate the point (the right
1200 REM end of a run) found above.
1210
1220 PROClocate
1230 flag%=FALSE
1240 REPEAT
1250
1260   REM Search rightward for right ends
1270   REM of runs and push them onto the
1280   REM software stacks.
1290
1300   IF x1% > xrbase% THEN flag%=TRUE:
       GOTO 1340
1310   PROCpush(x1%,y1%)
1320   PLOT92,x1%+dx%,y1%
1330   PLOT72,dx%,0
1340   PROClocate
1350   UNTIL flag%
1360
1370 REM The search has gone beyond the
1380 REM right end of the previous run.
1390
1400 REM Check if the run we're working
1410 REM on extends beyond the base run
1420 REM to the right - if so find it's
1430 REM right end and push that.
1440 IF POINT(xrbase%,yrbase%+dy%)=0 THEN
     PLOT76,xrbase%,yrbase%+dy%:PROClocate
     :PROCpush(x1%,y1%)
1450
1460 ENDPROC
1470
1480 DEF PROCpush(x%,y%)
1490
1500 REM Puts x% and y% onto the soft-
1510 REM ware stacks and into stacktopx%
1520 REM and stacktopy%.
1530
1540 REM Check we haven't stacked these
1550 REM points already.
1560
1570   IF x%=stacktopx% AND y%=stacktopy%
       THEN GOTO 1660
1580
1590 REM Perform stacking
1600
1610 sx%(stackptr%)=x%:sy%(stackptr%)=y%
1620 stacktopx%=x%
1630 stacktopy%=y%
1640 stackptr%=stackptr%+1
1641
1642 REM Check value of software stack
1643 REM pointer.
1650 IF stackptr%>SPMAX THEN SPMAX=stackptr%
1660 ENDPROC
1670
1680 DEF PROCpop
1681
1682 REM Pop software stacks and set
1683 REM new values of stacktopx% and
1684 REM stacktopy%.
1690 stackptr%=stackptr%-1
1700 stacktopx%=sx%(stackptr%)
1710 stacktopy%=sy%(stackptr%)
1720 ENDPROC
1730
1740 DEFPROClocate
1750 A%=13:X%=cords MOD 256
1760 Y%=cords DIV 256
1770 CALL&FFF1
1780 xyo=cords!0
1790 xyn=cords!4
1800 x1%=xyn MOD&10000:y1%=xyn DIV&10000
1810 x2%=xyo MOD&10000:y2%=xyo DIV&10000
1820 ENDPROC
1821
1830 DEFFNhorstep
1831
1832 REM Returns horiziontal size of
1833 REM pixel in current mode.
1834
1840 A%=135
1841 mode%=USR(&FFF4)
1842 mode%=mode% AND &FFFFFF
1843 mode%=mode% DIV&10000
1844 IF mode%=3 OR mode%>5 THEN PRINT"Wrong
     mode, dummy!!!":STOP
1850 IF mode%=0 THEN =2 ELSE IF (mode%=1 OR
     mode%=4) THEN =4 ELSE =8
```

References

Beebug Newsletter, *Acorn News,* Volume 1, Number 6, October 1982.

Fundamentals of Interactive Computer Graphics by Foley and Van Dam, Systems Programming series, 1982. Published by Addison-Wesley.

Tint Fill by A R Smith in *Computer Graphics,* August 1979.

Images of digits

Peter Kruger and Stephen Cronk of Digithurst Ltd explore the potential for high-resolution vision systems.

FOR SOME TIME the subject of image analysis has interested engineers and computer scientists. The ability to put a graphical representation of a real object into a computer and manipulate it has found countless applications from pattern recognition to CAD. Until recently most of the available vision hardware was based around either mainframes or specially designed processors; it did not have the general applications which would allow high-volume sales over which to spread development costs.

The microcomputer has a wide range of applications from office administration to process control and is proportionally lower in cost. Rather than using external hardware such as CPUs and RAM to capture the image the micro's own hardware is used as a frame store. The data becomes much more accessible to the user for the purpose of image processing.

Solid-state cameras provide the computer with digital data representing a map of pixels, which make up the image falling on the sensors of the camera's solid-state array.

Due to the low level of production solid-state cameras can be quite expensive. This is changing and solid-state sensors are being applied to a range of consumer products. Some solid-state cameras use optic RAM rather than a sensor. This enables an image to be fed straight into RAM, and the sensor itself to be read in the same way as a frame store. It provides a very rapid, low-cost method of obtaining a binary image.

The alternative to the solid-state camera is the Vidicon television camera which provides an analogue signal, which is then digitised. Unless expensive A to D converters are used this method is slower than the solid-state camera, but it does have the advantages of being both low cost and giving a grey-scale output. In general terms, where the object being analysed is slow moving and a grey-scale image is required a television camera system can be used. If a rapid access time is required and a binary image is sufficient, then a solid-state system should be used.

To carry out analysis the image data can either be sorted in external RAM, in the camera or frame store, or in the microcomputer itself. Advantages and disadvantages are present in both systems. The cost of external memory and the extra processing required is high, but may be necessary if the image analysis required is complex and takes up a large amount of RAM. If the microcomputer is large enough to hold the image and the software required, then the data becomes much more accessible to the user and the cost of additional hardware falls.

Once the image has been captured and stored it may be desirable to display it. The image may be shown as a binary or a grey scale. If a binary display is required the data must be scanned and each pixel compared to a preset threshold before deciding to display them or not. To simulate grey scale a group of screen pixels are used to represent each camera pixel. The thresholding technique is used for each pixel within the group and an image is displayed not dissimilar to newsprint. A contrast value can be used to set the threshold values for the pseudo grey-scale

Figure 1.



Figure 2.

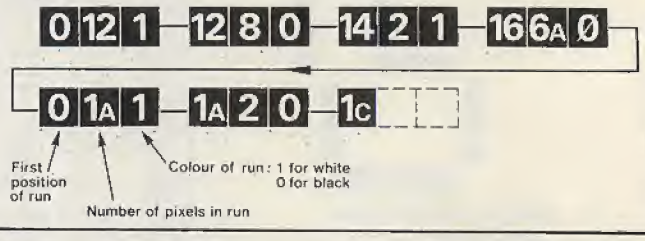

The data structures hold data in unprocessed or processed forms. Figure 1 shows unprocessed data, which is held in RAM. Figure 2 shows processed data which is unprocessed data that has been encoded.

A grey-scale image.

A binary image.

display. Both routines can be written using the computer's point-plot routine making the software transportable between different micros.

Data may take one of two forms when it is read into the computer. It may either be binary image data and be bit mapped or it may be grey-scale data and be byte mapped, each byte having a value representing the brightness of the respective camera pixel. At this point it will be necessary to clean up the image. High-resolution pictures gained with a video camera which has random interlace must have the effect of the interlace removed, which is achieved using recursive processing.

This is a relatively simple yet effective way of reducing noise or any form of sporadic interference on a digitised television picture. A number of frames are captured, each being averaged with the previous using the algorithm:

NEW PIXEL = (OLD PIXEL + INCOMING PIXEL)/2

The random nature of the interference means that over a number of frames the unwanted noise will tend to cancel out. Increasing the number of frames captured and averaged in this way improves the final result but also increases the time taken to reach that result. It is usually found that acceptable results are achieved after the first three or four frames; after that the small improvement in picture quality is minimal compared to the extra time needed.

A slightly more advanced version of the technique which leads to more flexible filtering allows the user to define the proportion of the incoming image that is mixed with the previous image, using the algorithm:

NEW PIXEL = K*OLD PIXEL + (1 – K)*INCOMING PIXEL

where K is a user-specified constant weighting the new image.

Recursive processing techniques can also be used to intensify a low-level video signal such as one that is shot out of doors at night. Each captured frame is summed with the previous frame so that over a period of about 10 frames, depending on the light level, a clear image can be seen. The process requires the image to be stored in 16-bit words as it is quite likely that the values obtained may be greater than 255.

To remove any electrical noise appearing as individual pixels, or marks and small objects which appear as single pixels and therefore cannot be verified at the current resolution, the image data is cleaned. The cleaning consists of examining pixels in groups of three and eliminating any pixels whose neighbours differ radically in intensity.

Image compaction techniques can be used to reduce the size of the image-data file to speed up data access during future processing. One method of data compaction is run-length encoding which reduces the memory required to hold an image by up to 16 times. Each pixel is examined and compared with the current threshold value. The next pixel in the current raster is also compared to the threshold value, and a run of pixels of the same thresholded value is built up. Each run is stored in a three-byte record, the first byte giving the start point of the run, the second byte the number of pixels in the run, and the third the colour of the run.

The amount of grey-scale and processed data which can be held at any one time will depend on the memory size of the computer being used. For example, a 256K Sirius will hold a 256 by 256 grey-scale image occupying 64K as well as at least one processed image at any one time. This allows the image to be processed at various thresholds without disturbing the original data.

Object/pattern recognition can be undertaken either by using values of area and perimeter or by examining the grey-scale data in greater depth. By using edge-detection methods it is possible to build up a series of co-ordinates which can be passed to a CAD software package.

With the introduction of more powerful microcomputers and with greater speed and memory mapping capabilities there is a greater potential for higher-resolution vision systems. To anyone who has spent hours inputting graphics into their programs the applications of low-cost vision systems is obvious. Images can be used as backgrounds for games programs or computer-aided learning software with images being read in and reduced to line drawings in a matter of seconds.

Solid-state cameras provide the computer with digital data.

Grey-scale image with edge detection on one section.

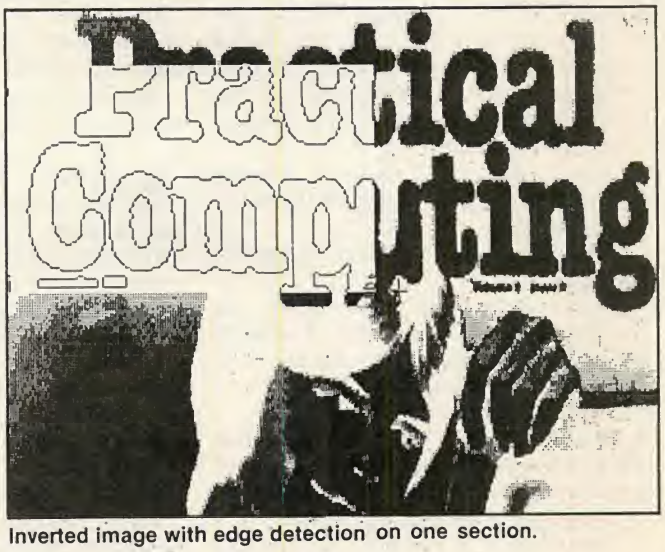

Inverted image with edge detection on one section.

Death to the machine

by Andrew Walker

Mandy's eyelashes flickered open, slashing the teardrop that welled in the corner of her eye. Memories of the night's storms overwhelmed her. She drew back, hating the world that had invaded her sleep and ruthlessly dragged her back to reality.

A dog barked in the avenue below. A blackbird's vivacious song rang out. Dazzling sunshine illuminated the curtains and showered the room in gold dust.

Henry sensed her waking, and he remembered the way she had quaked when the rolls of thunder and lightning had terrorised the night. Gently he touched her skin. To reassure her, he told himself.

They lay together side by side, aware of each other but not speaking, choosing instead the intimate silence of lovers. From the corner of her eye she watched him, his body bronzed in the mist of sunlight. She was afraid to move, to speak, afraid of destroying the moment.

At last he rose, silhouetted against the curtains, innocent of his own nakedness and his partner's idolatrous gaze. She studied him jealously — his flawless skin, his broad shoulders and pronounced muscles, his grace. He moved like a panther.

"Good morning Amanda," he said with a sparkling smile.

"Morning Henry," she whispered.

He carried her across the room and deposited her in the wheelchair that stood dormant in the corner. He felt no revulsion at the ugliness of her wasted limbs. Sympathy never crossed his mind.

Mandy watched him carefully. She hesitated nervously, then at last plucked up courage to speak.

"Last night . . . Henry. Thank you . . . . I know it broke all the rules. But I needed you."

Henry nodded a silent acknowledgement.

"Lights. Curtains." He gave the command as he left the room. The lights dimmed themselves and the curtains drew back, engulfing the room in light.

Mandy tucked into her breakfast with relish, scooping up the pieces of bacon with the fork in her right hand. The left was draped uselessly in her lap.

"Television 1," she ordered, and the television obligingly flickered into life. The Breakfast O'Clock News held her attention as she ate.

An explosion. The crashing and splintering of glass and wood. People running, shouting, throwing, hating. The crack of gunfire. Police armed to the teeth, charging. Panic. People screaming.

Mandy was sickened, but the screen compelled her to watch, holding her eyes the way a swaying cobra hypnotises its prey.

"A spokesman for the company, Robo-of-America, said that 10 robots were completely destroyed and several others had been severely damaged, putting the cost at 13 million dollars, 37 rioters were reported killed."

The robot newsreader spoke in cold tones, reading the idiot-tape that ran through his wrist. "The President attacked the left-wing militants who, it was said, were using people in a political game. By telling people that big business was replacing humans with robots, the communists were feeding on the fears of the working class for their own subversive ends. She added that we must all make sacrifices."

On the screen a robot was being dismembered by the rioters, while another was catapulted from a third floor window. Henry shuddered.

But Mandy was bored, numbed to the violence by its day-by-day repetition.

"Shopping," Mandy commanded. The television picture blinked out and a menu appeared, cursor flashing. Her fingers played deftly on the console installed on the right arm of her chair. She looked for things they were running out of — food, polish, toilet rolls. She compared prices and ordered items. She picked the colours that took her fancy and went window shopping for the latest fashions. New screens continually sprang into view, choices were made at leisure.

"What do you want to do today?"

Henry fired the question into the air as he worked, not looking at Mandy.

"Take me home, please. You know I want to go."

"This is your home."

"My real home," she pleaded.

Henry paused.

"You know what I think about going there. I don't like it. It's dangerous — full of thugs and hookers.

"And it's not your home — not any more. It's not the quiet suburb of your childhood. Wipe those memories away for your own sake."

"Take me," Mandy persisted. "Please."

Henry bit his lip, but replied reluctantly: "All right. You know I can never say no to you."

The Hill was home. Tree-lined boulevards, pipe-smoking artists lazing on street corners, discussing Picasso and extolling the beauty of the girls as they walked by. Sunny days, and families taking the air in their Sunday best, nodding to passing acquaintances.

It was all long gone. Buildings rotted and neglected streets flowed with garbage. The Hill groaned under man's physical graffitti.

Henry sensed the eyes on them, strangers in a strange land, anachronisms, belonging even to a different species. Faces hid behind curtains that flapped in open windows, through which the shadows of the rooms within seemed to give each building an aura of dirt and doom.

Mandy saw her childhood. The family and the home. The breaking of morning across the rose-tinted garden. Her friends. The birds that spoke to her. The way she would run through the dew-laden grass, chasing or being chased, laughing and shrieking with joy.

"Satisfied?" Henry asked malevolently. "See how ugly this place is. We shouldn't have come."

But Mandy was far away.

"Smash the bastard!"

The mob fought hard for the right to kick and punch its victim. People ran, jostled, writhed like maggots, a seething mass of frustrated, angry bodies. They vented their hatred, emptied their sack of fears, and found relief in aggression.

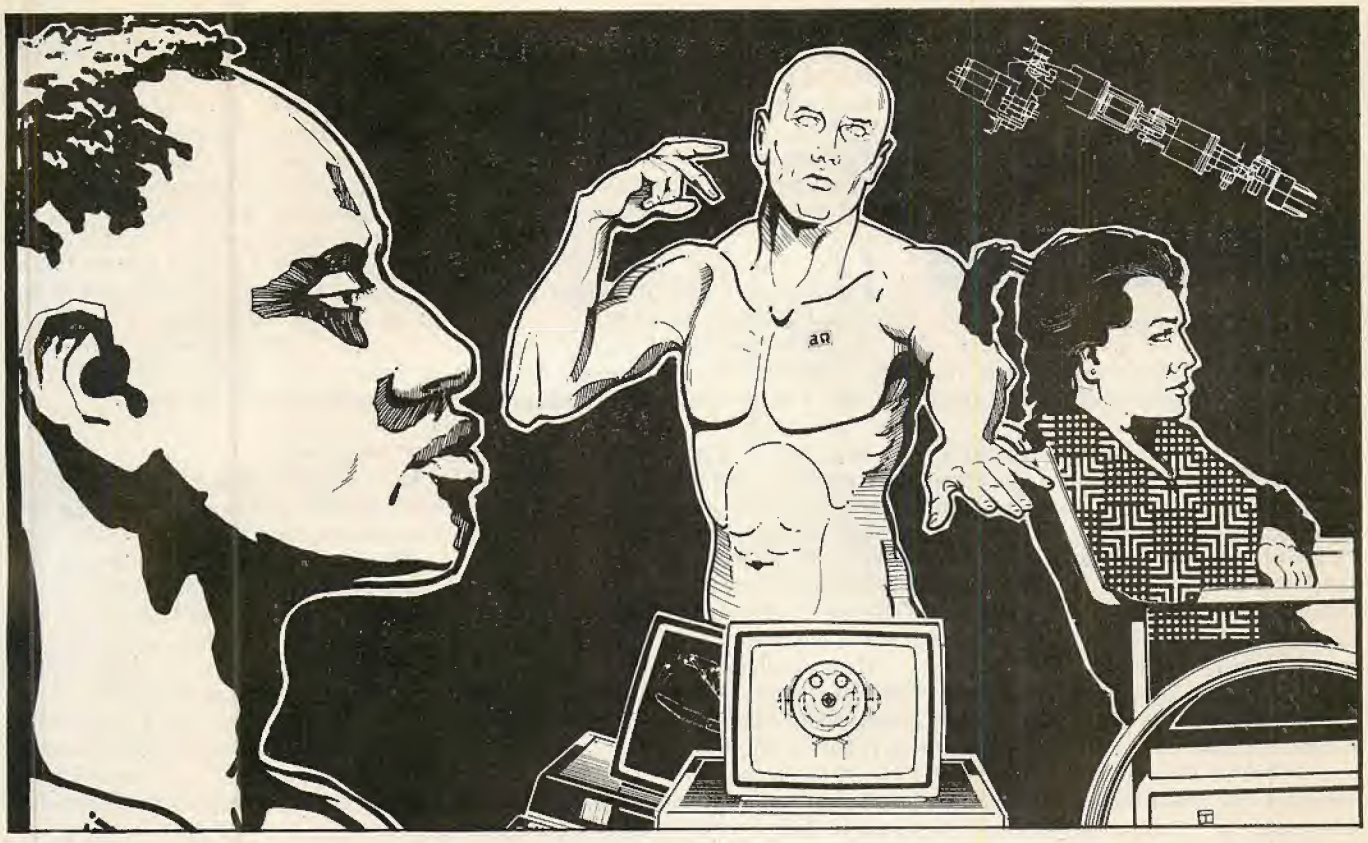

Moving down the street, heedless of passers-by, the amoeba broke and reformed, then broke again, and finally raced ahead, exhilarated by pain and violence. Each man was caught by the mood of blind rage, joining in the baiting and killing of guilty and innocent.

They tired, but as they dropped their places were taken by others, ever more eager, ever fresh and hungry, charged by the electricity of the moment. They grabbed a drone as he hauled a crate 10 times his size, descending on him like vampires. He struggled briefly before drowning in a sea of people. Cheering people, revelling in destruction, throwing parts of the drone hither and thither, people turned mad on a balmy Sunday afternoon.

"This one won't steal a man's job again. Get out of the way — let me kick it. Death to the machine!"

Henry shivered as he looked at the grieving, stricken torso. A stranger staggered along the street from the direction of the mob. His head head hung low, but as he neared Henry he looked up with glazed eyes. He was pale as death.

"They ... they ripped him apart." He trembled with each word. "A man. They did it to a man."

Henry turned, leaving the stranger retching in the gutter. He pushed Mandy along, glowering at the back of her head.

"Damn you!" he thought. "I told you."

And his circuits wondered at this new emotion.

"There's another!" voices cried.

Fingers darted in a million directions. The voices grew in number. Factions split, intoxicated by violence, clashing over their prey like packs of hyenas.

"There's one!"

The cry pealed out like church bells, across the streets and through the alleys, to shoppers, to people leaning from windows with ghoulish curiosity, to a mongrel that paused briefly as it chewed a robotic leg, to a gang prising open a Space Invaders machine. To a new victim. It tolled the death knell.

A strong, steady finger pointed. The finger of the hard man. A compelling finger that urged the eye to follow its line to the guilty man who stood there dumbfounded, still holding on to the wheelchair in which his prisoner sat, a poor, weak-looking human girl.

The cry tolled out for Henry.

He broke into a run. With a wave of his arm the hard man commanded the crowd of onlookers to give chase. But they were on their way already, stirred by propaganda, feverishly wanting to free the girl from the inhuman monster.

The wheelchair careered madly as Henry galloped, hounded by the baying hunters. He swung round corner after corner, in and out of alleyways, trying vainly to shake them off. The mob struggled, a cursing, stumbling rabble. But always he sensed the hard man hard on his heels.

"Leave me Henry. Run."

Mandy's pleas grew as the wheelchair rocked and rolled and Henry's silence lengthened.

His circuits burst with energy, transceiving messages. Logic chips warned him of the danger to Mandy, how she would be mistaken for a robot, how she would be mutilated, how the humans would kill her from instinct alone. Chips of intuition calculated probabilities — the chance of her neck being broken if they kept the present speed, her chances of survival if he left her.

"We are 74 percent certain that a savage band of humans would not harm a cripple girl," they said. "Save yourself," cried out self-preservation units.

But wise old legal chips read the rules: "You cannot leave her to a doubtful fate; preservation of the machine is secondary. Self-sacrifice is an honourable death."

"Leave me," Mandy added.

"Can't," Henry stammered, finally, through gritted teeth.

"Run Henry, run," Mandy pleaded tearfully.

"Run rabbit, run," bellowed the hard man, like a blast from the farmer's gun.

The packs closed in, howling triumphantly as their prey froze, each eager to cheat the other of its kill. And then the hard man stood face to face with Henry.

Henry's brain tore into itself. Logic clashed with law. Morality proclaimed.Self-preservation cried it down. "Kill him — you can't kill a human — it's your only chance — his life or hers and yours — Primary Robotic Law states ... "

Anonymous circuits assented or dissented in a clamour of a billion electronic pulses. He clutched his head. He

(continued on next page)

Death to the machine

(continued from previous page)

argued and proposed solutions and then dashed them all against the wall of robotic law.

The hard man smiled knowingly. With a crayon he began to daub Henry's forehead in blue: "666". The number of the robot, reckoned the propagandists.

Henry seethed with rage. He let go a bellow, like a trapped animal caught without hope, a bellow that turned to a scream of anger and shame. A scream that became a flash of insanity.

A clenched fist lashed out, breaking the invisible barrier: for an instant Henry became human. The hard man's jaw cracked behind the punch, and like a man possessed, his whole body convulsed in a wild frenzy.

Henry stepped back aghast, shocked by his violence, disowning the fist that had offended, and repulsed by the spectacle and nauseating fumes before him. A flood of integrated circuits, cogs and lengths of wire poured from the hard man's mouth. His head erupted, shattering into a billion slivers of silicon.

Suddenly all was quiet, his death throes exhausted, his headless corpse frozen upright, erect for eternity. The stupor that hung over the scene held everyone as Henry edged away. No one followed.

"He was just a tool," Henry insisted. "Like the video games, like the bus driver. Like me."

"I don't understand." Mandy repeated the statement for the umpteenth time, chafing Henry's nerves like sandpaper on an open wound.

Birds were singing in the trees. The sun shone from a clear sky. Towering over her stood the city, a warm paternal giant whose strength comforted her, a city of glass skyscrapers, hygiene and automation, where there was light and no shadows, where the people thought of peace and beauty.

Henry knelt in front of her as she wiped the blue scrawl from his forehead, fussing maternally. She avoided his eyes. "He was a robot — all your militants use them," Henry explained. They're programmed to seek out other robots, stir up feeling against them, incite riots: a Judas. Built to slaughter his own."

"It's always the same," he went on. "Cars, television. You invent these things, make the world a better place. Then what? You're lost. You take them for granted, ignore them, distort them, manipulate them, turn them to evil and then learn to fear and hate them.

"You wonder at your own power: you've made something in your own image — you are God. But you're afraid — it's better than you. So you tear it down. Seek it out, cut it out like a cancer."

Mandy was pinned to her chair by the venom in Henry's tongue and the crazed ravings of his mind. She trembled in fear of the stranger before her.

Circuits raged in new-found freedom, or cowered in seclusion, screaming their terror of this brave new world.

"Closedown."

The command froze Henry in mid-sentence. His eyes closed. He was suspended in time.

"Re-initialise," God commanded.

Henry flickered into life, and a warm, comforting smile spread on his lips.

"Isn't it a lovely day, my love?" He spoke in a sickly sweet voice that chilled her spine. "Let's go to the park."

The crisis was over, but a malevolence crept into his face, a malevolence that even God did not detect. It distorted his features and set a darkness in his eyes as it spread to his powerful arms.

Below them the avenue stretched down to the wharf, where streetside cafes vibrated with life, and the sun smiled on the rich, beautiful people. Henry began to loosen his grip.

DUPLEX

NOW REQUIRE

DISTRIBUTORS WORLD WIDE

FOR THEIR

OCTET INTEREACES

FOR OLIVETTI'S ET 121 ELECTRONIC TYPEWRITER

Duplex has successfully developed two plug-on interfaces for Olivetti's ET 121 electronic typewriter — these are currently being distributed exclusively by British Olivetti themselves in the UK and Eire. The Duplex interfaces enable the ET to be used as a letter-quality printer and/or terminal for a computer, add an extra 4,000 characters to the ET's one-line memory, enable the ET to communicate with other Olivetti word processors and typewriters, and allow the ET 121 to be attached to a telex tape punch/reader and tape cassette interface unit to provide infinite external memory. Foreign keyboards and character sets can easily be accommodated.

DUPLEX PLUG-ON OCTET KSR/MSR INTERFACE

STANDARD ET 121 TYPEWRITER

GENERAL PURPOSE/ WORD PROCESSING COMPUTER

ET 121 + OCTET

OCTET T1

COMPUTER

TELEX TAPE STATION OCTET-PO/PR

THE OCTET 121 — KSR

(Keyboard/send/receive)

- PLUG-ON unit. (30 seconds or less to fit or remove)
- 2000 Char. Print Buffer
- RS232C Specification (TX & RX)
- Three modes of operation (normal/set up/Ksr)
- 'WHITE-SPACE-SKIP' to increase print throughput up to 45 cps
- Printer Pause/Resume Key
- True KSR (Keyboard/send/receive) mode
- Keyboard SET-UP mode to change operating parameters (non-volatile)
- Xon/Xoff, DSR/DTR, ETX/ACK handshaking protocols

If you are interested in becoming an exclusive distributor in your country for the Octet interfaces, contact D. J. Winder at Duplex. Countries of particular interest include AUSTRALIA, NEW ZEALAND, HONG KONG, CANADA, USA, MIDDLE EAST and most EUROPEAN countries.

THE OCTET 121 — MSR

(Memory/send/receive)

- All KSR features and
- 4000 Char. Working Memory
- Simple to use TEXT-EDITOR
- Five modes of operation. (Normal/telex/letter/setup/Ksr)
- Battery-backup & Power-Fail-Safe. (Protects memory contents)
- Allows OCTET series products to be interconnected
- Special FORM-FILLING facility using multiple 'stop-codes'
- Allocate up to 100 special phrases (paras or whole letters)
- Standard ET121 features retained at all times

DUPLEX Communications Ltd.

The Interface People

Midlands/North – 2 Leire Lane, Dunton Bassett, Nr. Lutterworth, Leicestershire LE17 5JP. Tel: 0455 209131 or 202150

South – 52 High Street, Stock, Essex CM4 9BW. Tel 0277 841011

● **Circle No. 171**

A question of significance

With Owen Bishop's Basic programs you can tell chance from choice.

"COFFEE, TEA OR ME?" Ignoring the "Me" of the memoirs of those incorrigible airline stewardesses, Trudy Baker and Rachel Jones, still leaves you with a choice to make: shall it be tea or shall it be coffee? It must be one or the other, but you are not allowed to have both. To put it more technically, they are mutually exclusive choices.

This kind of choice is thrust upon you many times a day. Sometimes you make a response based on a strongly felt preference or a reasoned argument. But often you are indifferent and decide on a whim or by tossing a coin. Your choice might just as well be the result of running:

```
10 choice = RND(2)
20 IF choice = 1 THEN PRINT "Coffee"
   ELSE PRINT "Tea".
```

Suppose a board of directors is offered tea or coffee and all choose tea. Does it mean that they genuinely prefer tea? Is it worthwhile brewing up coffee next time? A majority of six to none seem a strong one, but can you be sure that the board has a genuine preference for tea?

There is no need to go into the reason for the preference, if there is one: the tea may be superb, the coffee may be like dishwater or maybe they are just a bunch of cha-wallahs. You just want to know whether they have a genuine preference or made their choice through whim.

Suppose the directors had no strong reasons for their choices and each decided to run the random-choice program on the firm's mainframe and imbibe accordingly. Any given director is equally likely to select tea or coffee, unless there is a bug in the mainframe or its random-number algorithm. Six different outcomes are possible:

all six choose tea
five choose tea and one chooses coffee
four choose tea and two choose coffee
three choose tea and three choose coffee
two choose tea and four choose coffee
one chooses tea and five choose coffee
all six choose coffee

These seven eventualities are not equally likely to occur. For instance, there is only

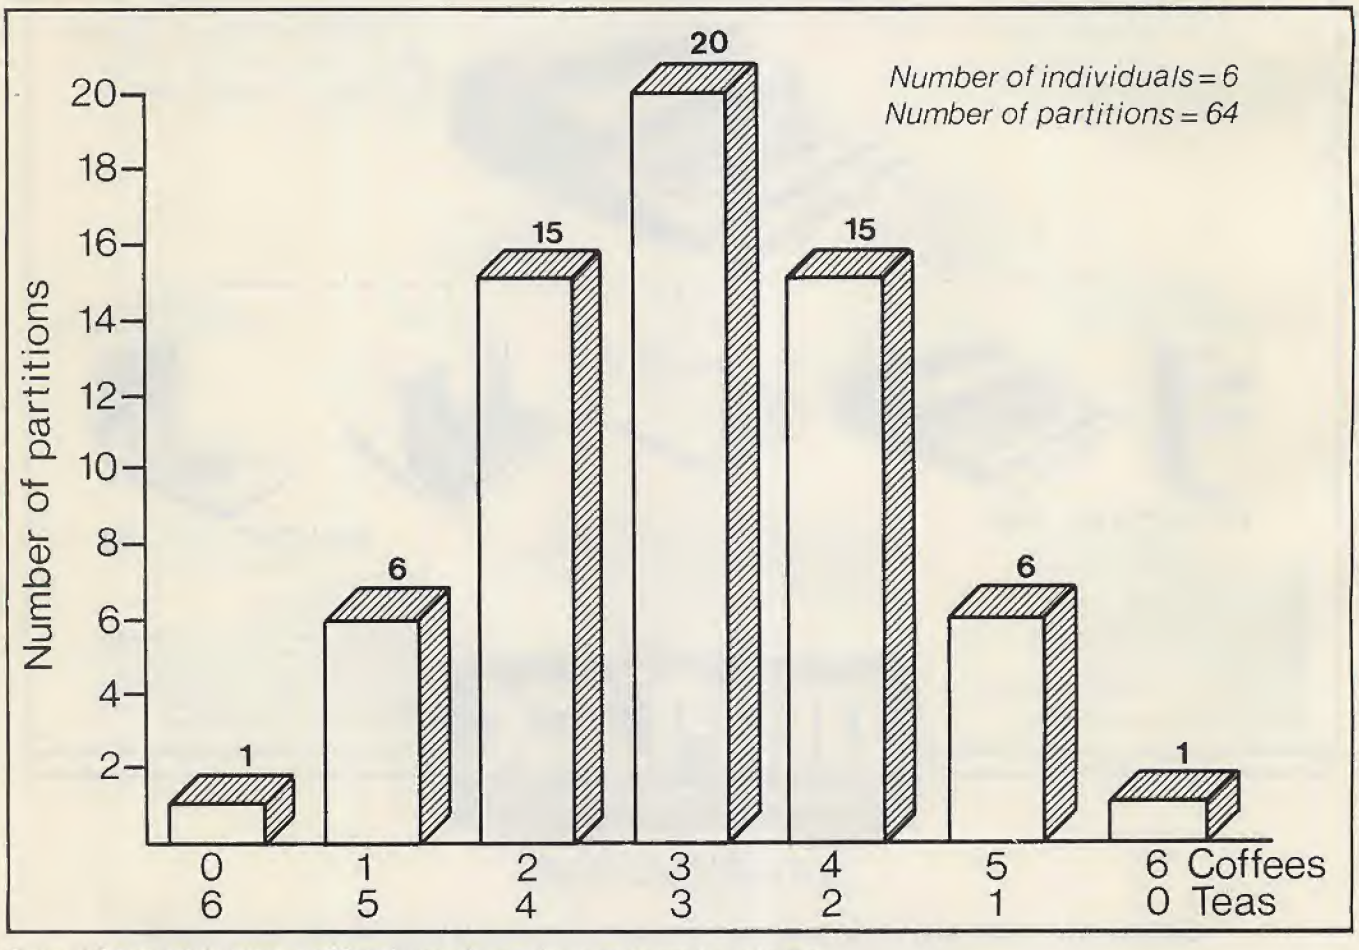

Figure 1. There are 64 ways in which six people can choose between tea or coffee.

one way in which all can choose tea, and only one way in which all can choose coffee. There are six ways — one for each director — in which one chooses coffee while the others have tea, and six ways of serving one tea and five coffees.

For two coffees and four teas you have to work out how many ways there are of picking out the two coffee-drinking directors. It is best done by representing the directors by the initial letter of their first names — they are called Alf, Bert, Connie, Dick, Evie and Fred — and listing them as in table 1 to what the computer tells them to choose.

The groupings in the middle column represent all the possible ways of picking out those who are to have coffee. There is no need to go further, for the arrangements are symmetrical — see figure 1.

There are 15 ways in which four choose coffee, six ways in which five choose coffee and one way in which all choose coffee. The total number of ways in which the directors can be divided into coffee drinkers and tea drinkers is 1 + 6 + 15 + 20 + 15 + 6 + 1 or 64 ways.

If all choose tea there is only one way out of the 64 ways that this can happen randomly. Their behaviour can be explained in two ways:

- they really do prefer tea
- they are choosing at random, and a one-in-64 event has occurred.

It is safe to infer that their apparent preference for tea is genuine. On the other hand, there still remains the one-in-64 chance that it is a random choice, so unless you are prepared to take that risk of being wrong, it is wise to keep coffee on the menu for future board meetings.

But what if one director had chosen coffee? The calculations show that there are six ways of this happening in a purely random way. You could still believe they prefer tea but there is a much stronger risk that their corporate choice was made at random. There is now a six-in-64 chance, around nine percent, that you are observing random choices and not real decisions.

You could also arrive at the same conclusion if you had just witnessed the directors voting five to one in favour of investing half the company's funds in a new expansion project. With so many factors involved in the market the outcome is virtually unpredictable, and a random choice may be as good as any. With six directors, only a unanimous decision can signify anything to a mere outsider.

The scene now changes to a school biology laboratory where the students are watching six woodlice in an apparatus called a choice-chamber. Incidentally, the woodlice are also called Alf, Bert, Connie, Dick, Evie and Fred. They are being made to choose between going to a specially prepared damp part of the chamber or to a part which is dry.

As it turns out, they all go to the damp part. You have not been able to ask them which they prefer, and before the test was run you did not know which they would prefer. You took care to design the apparatus so that the two sections of the chamber should be equal in all respects other than dampness, and that the woodlice should be put into the chamber at a point where they were equidistant from both.

As with the directors, so also with the woodlice, you must have a unanimous decision when there are only six choosers. A five-to-one majority is hardly significant, for it could be obtained on over nine percent of occasions by random means, with no purposeful choice being made.

Thinking of the same kind applies to any situation in which individuals are being offered mutually exclusive choices. It even applies to general elections — ignoring the minor parties — but here the electorate is so large that even a small

(continued on next page)

Table 1.

How many choose coffee	Who has coffee	Number of ways
0	no one	1
1	A, B, C, D, E, F	6
2	A+B, A+C, A+D, A+E, A+F, B+C, B+D, B+E, B+F, C+D, C+E, C+F, D+E, D+F, E+F	15
3	A+B+C, A+B+D, A+B+E, A+B+F, A+C+D, A+C+E, A+C+F, A+D+E, A+D+F, A+E+F, B+C+D, B+C+E, B+C+F B+D+E, B+D+F, B+E+F, C+D+E, C+D+F, C+E+F D+E+F	20

```
10  HOME : PRINT  TAB( 14)"THIS OR THAT?"
20  VTAB 5: INPUT "HOW MANY INDIVIDUALS IN TOTAL?  ";N
30  IF N < 0 OR N > 30 THEN  PRINT "NUMBER OUT OF RANGE, PLEASE RE-ENTER": GOTO
20
40  CALL  - 868
50  VTAB 7: INPUT "HOW MANY IN ONE OF THE GROUPS?  ";G
60  IF G < 0 OR G > N THEN  PRINT "NUMBER OUT OF RANGE, PLEASE RE-ENTER": GOTO 5
0
70  PRINT
80  PRINT "CALCULATING"
90  IF G = N / 2 THEN P = 100: GOTO 220
100  IF G > N / 2 THEN G = N - G
110 C = 0
120  FOR J = 0 TO  INT ((N - 1) / 2)
130  GOSUB 1000
140  IF J = G THEN CG = C
150  NEXT J
160 C = C * 2
170 CG = CG * 2
180  IF N / 2 =  INT (N / 2) THEN NF = N / 2: GOSUB 2000
190 C = C + 1 / F / F
200 P = CG / C * 100
210 C = C * F
220  PRINT : PRINT "THE PROBABILITY OF OBTAINING A RESULT ASEXTREME OR MORE EXTR
EME THAN THIS IS:": PRINT : PRINT  TAB( 17) INT (P + .5);" %"
230  END
1000 NF = J: GOSUB 2000
1010 D1 = F
1020 NF = N - J: GOSUB 2000
1030 D2 = F
1040 C = C + 1 / D1 / D2
1050  RETURN
2000 F = 1: IF NF = 0 THEN  RETURN
2010  FOR K = 1 TO NF
2020 F = K * F
2030  NEXT K
2040  RETURN

]RUN
              THIS OR THAT?
HOW MANY INDIVIDUALS IN TOTAL?  15
HOW MANY IN ONE OF THE GROUPS?  4

CALCULATING

THE PROBABILITY OF OBTAINING A RESULT ASEXTREME OR MORE EXTREME THAN THIS IS:

                  12 %
```

Applesoft Basic program and sample run.

A question of significance

(continued from previous page)

majority is significant. It is when only a few individuals are making a choice that you need to assess more precisely the effects of random or partly random factors.

Experiments in animal behaviour are another instance in which it is essential to take possible randomness into account. It was in this setting that tests for significance were first designed. You often have only a few animals to use, so randomness plays a relatively large and disturbing part in the result. The same problem arises in other kinds of scientific and medical experiment — even those which do not involve individuals making a deliberate choice.

The alternative could be "does the patient recover or not?" or "does this drug kill the pathogen or not?" The criterion is that there must be two mutually exclusive outcomes with an apparently equal chance of either outcome.

Working out the odds for a large number of individuals is extremely tedious, which is where a micro is a great help. You have to find out in how many ways it is possible to partition the individuals into two groups. A group of n individuals partitioned into two groups can be represented by x:y, where x + y = n. For example two out of six directors taking coffee and four taking tea can be represented by 2:4.

Table 2.

Partition	No. of ways
0:n	n!/0!(n – 0!) = 1
1:n – 1	n!/1!(n – 1!) = n
2:n – 2	n!/2!(n – 2)!
and so on down to	
n – 2:2	n!/(n – 2)!2!
n – 1:1	n!/(n – 1)!1! = n
n:0	n!/(n – 0)!0! = 1

The different partitions and the calculation of the numbers of ways are shown in table 2.

The symbol ! means factorial. For example, 5! means $5\times4\times3\times2\times1$. Unexpectedly, 0! is 1. The expressions in table 2 are all of the form

n!/g!(n – g)!

where g is the number of individuals making one choice and (n – g) is the number making the other choice. The micro has to work out all these terms and add them to find out how many different partitions are possible.

Since the table is symmetrical about the halfway line, the micro only has to work out the top half and double the result. If n is even, there is a row halfway down the table for n/2:n/2. Picking out half the individuals in all possible ways to put into one group automatically picks out the other half to go into the other group, so this partitioning is added in only once.

While the computer is summing all these expressions, it also sums those expressions which refer to partitions as extreme or more extreme than the one being tested. If one of the six directors chooses differently from the others you need to sum the expressions for 0:6 and 0:5 and then double the sum. You can then work out the probability of getting a majority decision of five or more out of six according to the formula.

((number of ways for 0:6, 0:5, 5:0, 6:0) ÷ (total number of ways)) × 10 percent

The n! in the denominators of each quantity cancel out, so there is no need to evaluate it.

Listings are provided for the Apple II and the BBC Microcomputer. The Apple II version requires n to be more than 2 and not more than 30. Calculating factorials greater than 33! causes an overflow error. Since the test is not of great interest when numbers are larger than 30 this is no disadvantage.

N is the number of individuals observed and G is the number in one of the groups. Line 90 disposes of one obvious result without calculation. Line 100 converts G to be the number of the smaller group. Lines 120 to 150 run through the possible partitions, except equipartition when N is even.

The program uses the subroutine beginning at line 1000 to work out the expression

1/G!(N – G)!

for each value of G in turn, and accumulates their total; the subroutine beginning at line 2000 calculates the factorials required. NF is the number for which the factorial is to be calculated and F is the factorial. In line 140 the subtotal of values up to and including G is registered as CG.

The totals C and CG are then doubled in lines 160 and 170. If N is even, a value for the partition N/2:N/2 is then added to the total obtained in lines 180 to 200. Line 210 calculates probability P as a percentage.

The percentage is rounded off to the nearest whole number; if you are interested in long odds you could alter the proposal to print out any number of decimal places. The sample run might have been used to assess the results of asking 15 breakfasters whether they would prefer kipper or haddock. The fact that 11 take kippers does not support the belief that breakfasters in general prefer kippers. With a purely random selection, there is a 12 percent chance that the number disagreeing with the majority will be four or fewer. A majority of 11 to four means very little.

Figure 2 shows that the ways in which 10 or more people can choose coffee — or kippers — at random is six percent of the total number of ways. The program gives an answer of 12 percent as in line 170 it doubles the numbers relating to the shaded area before working out the percentage. Which result you take depends on what you want to know.

If you want to know the probability of

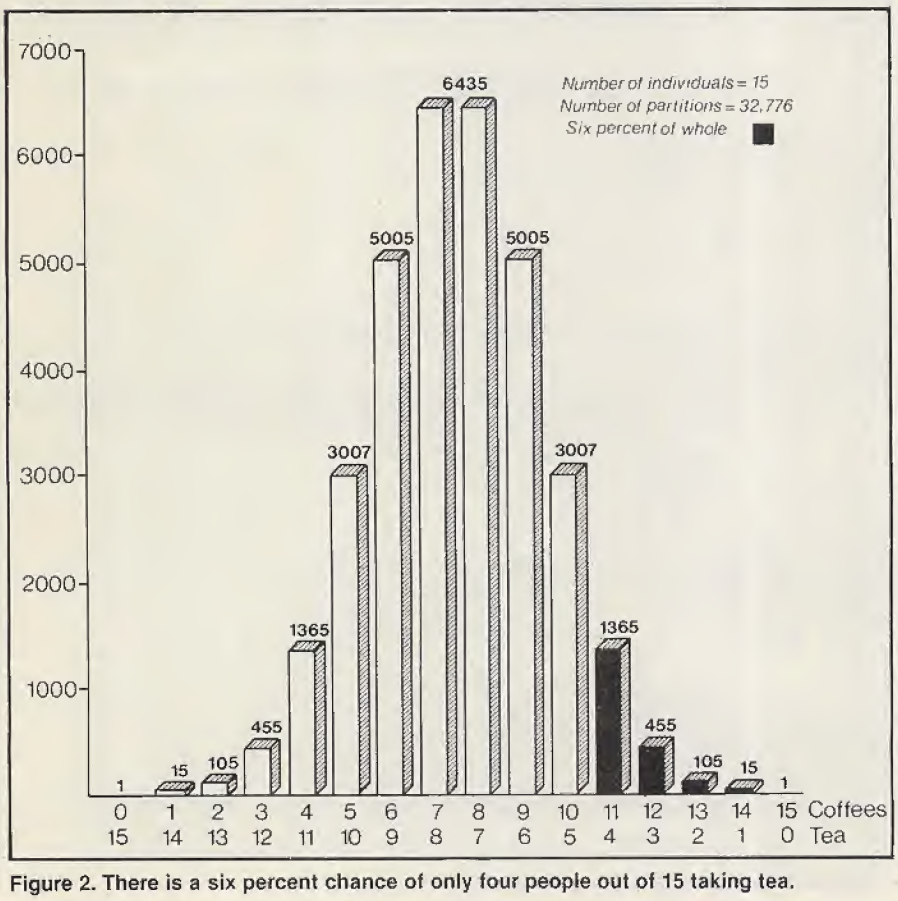

Figure 2. There is a six percent chance of only four people out of 15 taking tea.

getting any extreme result — either lots more coffees than teas or lots more teas than coffees — then take into account both tails of the distribution of figure 2. This is the usual procedure, as there is generally no reason for expecting a strong majority. After all, you are assuming that people like tea or coffee equally well. If a majority is found it is usually explained away as a random occurrence by saying, for example: "You could have got this majority by tossing heads or tails: it does not prove that people prefer coffee — or kippers".

There may be occasions on which you believe there is a preference and are trying to prove it. Then you say, for example: "11 out of 15 choose coffee; at random, 11 or more in favour of coffee occurs on only six occasions out of 100, so possibly this shows that there is a preference. The evidence is not strong, for there is still the six percent chance of it being a random result. But as figure 2 shows, the numbers of ways decrease sharply towards the tail of the distribution. If 12 choose coffee, the area to the right is only two percent of the whole. Just one more coffee drinker should make you feel much more secure in believing that coffee is preferred.

The BBC program is in principle the same as the Apple version but makes use of the special facilities available on the BBC machine. The calculation of each value of the fraction.

1/group!(total-group)!

```
   10 CLS: PRINTTAB(13)"This? - or T
hat?"
   20 INPUTTAB(0,5)"How many individ
uals in total",total
   30 IF total<2 OR total>30 THEN PR
INT"Number out of range, please re-e
nter":GOTO20
   40 PRINTSPC(40)
   50 INPUTTAB(0,7)"How many in one
of the groups",group
   60 IF group<0 OR group>total THEN
 PRINT"Number out of range, please r
e-enter":GOTO50
   70 PRINTSPC(80)
   80 PRINT"CALCULATING"
   90 IF group = total/2 THEN probab
ility = 100: GOTO 210
  100 IF group > total/2 THEN group
= total - group
  110 comb = 0
  120 FOR partition = 0 TO INT((tota
l-1)/2)
  130 comb = comb + FNfractions(part
ition)
  140 IF partition = group THEN grou
pcomb = comb
  150 NEXT partition
  160 comb = comb*2
  170 groupcomb = groupcomb*2
  180 IF total/2 = INT(total/2) THEN
 comb = comb + 1/FNfact(total/2)↑2
  190 probability = groupcomb/comb*1
00
  200 PRINT:PRINT"The probability of
 obtaining a result asextreme or mor
e extreme than this is:":PRINTTAB(9,
16) INT(probability + .5);" %"
  210 END
 1000 DEF FNfractions(partition)
 1010 = 1/FNfact(partition)/FNfact(t
otal-partition)
 2000 DEF FNfact(number)
 2010 IF number = 1 OR number = 0 TH
EN =1 ELSE = number*FNfact(number-1)


RUN
                This? - or That?
How many individuals in total?15

How many in one of the groups?4

CALCULATING
The probability of obtaining a resul
t asextreme or more extreme than thi
s is:
          12 %
```

BBC Basic program and sample run.

is performed by a function FNFractions, defined at line 1010, which uses function FNFact at line 2010 to calculate the factorials.

The total number of ways, Comb, is accumulated at line 130. At line 140 this cumulative value is assigned to the variable, Groupcomb, when the partition being evaluated is the same as the partition observed. Cumulative totals are doubled at line 190 and the single addition is made at line 180 in the case when the number of individuals is even.

References:

Coffee, Tea or Me? by Trudy Baker and Rachel Jones. Corgi Books, 1967.

Longman Statistical Utility by Owen Bishop. Longman Microsoftware, 1983.

Statistics for Biology by Owen Bishop. Longman, (4th edition 1983).

Check-out network

At Orpington's Walsingham School they use a Research Machines micro to simulate a point-of-sale terminal. Hewan Ormson explains how it's done.

MANY LARGER SHOPS and supermarkets are installing electronic point-of-sale terminals, POSTs, which are generally on line to a central computer. There are several different methods of data capture, including: keyboard input of a code number; optical character reader, or light wand; magnetic stripe reader; laser scanner, or bar code reader; merchandise ticket reader, or kimball tag.

British Home Stores has branches in most major shopping areas, and they all have electronic POST. BBC Radio includes a programme in the "Computers in the Real World" series which examines this system. Each POST is connected to an in-store minicomputer, or an area mini-computer. The minicomputer holds all the data relating to the stock using disc storage. The minicomputer is joined by telephone line to a mainframe at BHS headquarters — see figure 1.

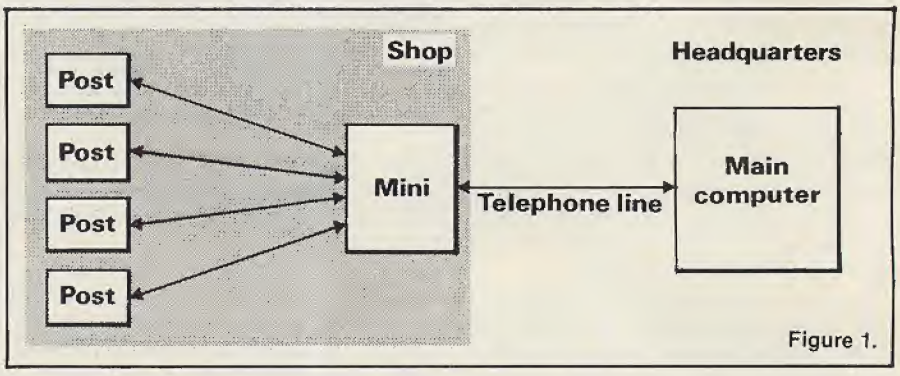

Figure 1.

Everything sold in the store is given a six-digit code number. The prices are shown on the shelves rather than on each individual item. When a customer buys an article he or she takes it to a POST. The POST operator types in the code; the POST finds the item details from the minicomputer and displays the price. The operator keys in any other items and the POST totals the prices. The operator keys in the maount of cash tendered, the POST displays the change due and prints out a receipt.

The receipt typically contains the following information: the type, price and number of each item purchased; the total cost; the amount of cash tendered and the change given; the date, etc. The

```
10 REM  ************************
20 REM  ************************
30 REM  ***                    ***
40 REM  ***        SHOP        ***
50 REM  ***    Version  1.1    ***
60 REM  ***                    ***
70 REM  *** Demonstrate POST ***
80 REM  ***                    ***
90 REM  ***    By H.Ormson     ***
100 REM ***     June 1983      ***
110 REM ***                    ***
120 REM ************************
130 REM ************************
140 REM
150 CLEAR 1000:DIM C(20),I$(20),P$(20)
160 ON BREAK GOTO 1660
170 PUT 12,21
180 ?"                    SHOP
190 ?:?:?:?:?:?
200 A$=GET$(0)
210 INPUT"Type the date: ",D$
220 REM *Check that only RETURN not pr
essed*
230 IF D$="" THEN PUT 11:GOTO 210
240 REM *Read in data*
250 RESTORE
260 FOR C=1 TO 20
270 READ C(C),I$(C),P$(C)
280 NEXT C
290 PUT 31
300 REM *Set up display*
310 ?:?:?:?:?"       The Walsingham Su
perstore"
320 ?"       ------------------------
"
330 ?:?:?" Type the code number then p
ress RETURN"
340 ?"-------------------------------
--------"
350 ?:?"         Code no:"
360 REM *Set up coords - initialise va
rs*
370 X=33:Y=45:T=0:ZX=0
380 REM *Ask for code number*
390 FOR C=1 TO 4
400 PUT 22,Y,X,"Item",STR$(C)," ":INPU
T"",C1$
410 REM *Erase previous incorrect entr
y - 43 blanks*
420 IF ZX=1 THEN PUT 22,Y,49,"
                                    ":Z
X=0
430 REM *Find corresponding article*
440 FOR Z=1 TO 20
450 IF " "+C1$=STR$(C(Z)) THEN 510 ELS
E NEXT Z
460 REM *Give error message, set ZX=1-
 10 blanks*
```

Figure 2.

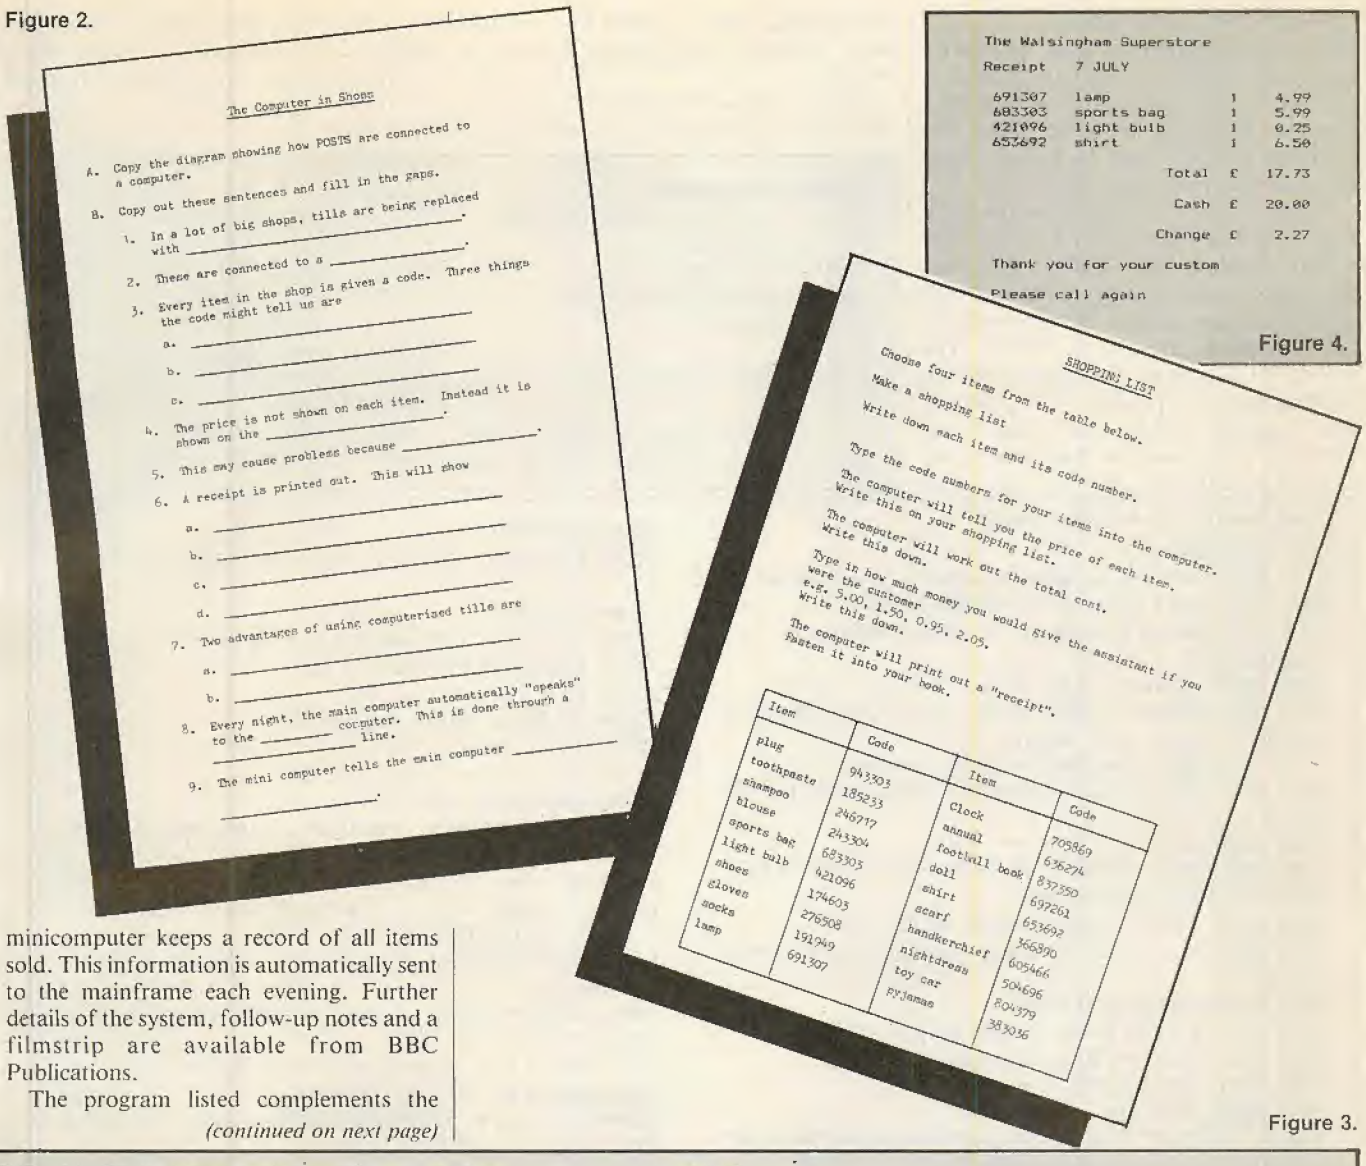

The Computer in Shops

A. Copy the diagram showing how POSTS are connected to a computer.

B. Copy out these sentences and fill in the gaps.

1. In a lot of big shops, tills are being replaced with _____.
2. These are connected to a _____.
3. Every item in the shop is given a code. Three things the code might tell us are
   a. _____
   b. _____
   c. _____
4. The price is not shown on each item. Instead it is shown on the _____.
5. This may cause problems because _____.
6. A receipt is printed out. This will show
   a. _____
   b. _____
   c. _____
   d. _____
7. Two advantages of using computerised tills are
   a. _____
   b. _____
8. Every night, the main computer automatically "speaks" to the _____ computer. This is done through a _____ line.
9. The mini computer tells the main computer _____.

The Walsingham Superstore

Receipt 7 JULY

691307	lamp	1	4.99
683303	sports bag	1	5.99
421096	light bulb	1	0.25
653692	shirt	1	6.50
	Total	£	17.73
	Cash	£	20.00
	Change	£	2.27

Thank you for your custom

Please call again

Figure 4.

SHOPPING LIST

Choose four items from the table below.

Make a shopping list

Write down each item and its code number.

Type the code numbers for your items into the computer.

The computer will tell you the price of each item. Write this on your shopping list.

The computer will work out the total cost. Write this down.

Type in how much money you would give the assistant if you were the customer e.g. 5.00, 1.50, 0.95, 2.09. Write this down.

The computer will print out a "receipt". Fasten it into your book.

Item	Code	Item	Code
plug	943303	Clock	705869
toothpaste	185233	annual	636274
shampoo	246717	football book	837350
blouse	243304	doll	697261
sports bag	683303	shirt	653692
light bulb	421096	scarf	366890
shoes	174603	handkerchief	605466
gloves	276508	nightdress	504696
socks	191949	toy car	804379
lamp	691307	pyjamas	383036

Figure 3.

minicomputer keeps a record of all items sold. This information is automatically sent to the mainframe each evening. Further details of the system, follow-up notes and a filmstrip are available from BBC Publications.

The program listed complements the

(continued on next page)

```
0 PUT 22,Y+1,40,"Code number wrong.
y again"
0 PUT 22,Y,39,"              "
0 ZX=1:GOTO 400
0 REM *Print code & article*
0 PUT 22,Y,49,I$(Z):PUT 22,Y,63,"1":
T 22,Y,65,P$(Z)
5 REM *38 blanks*
0 PUT 22,Y+1,40,"
                "
0 REM *increase total & Y coord*
0 Y=Y+1:T=T+VAL(P$(Z)):T$(C)=I$(Z):T
(C)=P$(Z):T(C)=C(Z)
0 NEXT C
0 PUT 22,50,57,"Total"
0 T=INT(T*100)/100
0 L=T
0 REM *Add trailing zeros etc*
0 GOSUB 1350
0 REM *Print total in correct positi
*
0 IF LEN(A1$)=6 THEN PUT 22,50,64,A1
GOTO650
0 PUT 22,50,65,A1$
0 REM *Ask for cash*
0 PUT 22,52,57,"Cash?    ":INPUT"", C
H$
0 IF CASH$="" THEN 650
0 REM *Check input for alpha charact
ers*
680 FOR B1=1 TO LEN(CASH$)
690 IF ASC(MID$(CASH$,B1,1))>57 OR ASC
(MID$(CASH$,B1,1))<46THEN PUT 22,52,36
,"Use numbers only
    ":GOTO 650
700 NEXT B1
710 CASH=VAL(CASH$):CASH=INT((CASH+.00
1)*100)/100
720 REM *Output cash in correct positi
on
730 L=CASH:GOSUB1350
740 IF LEN(A1$)=5 THEN A1$=" "+A1$
745 REM *erase previous entry - 40 bla
nks*
750 PUT 22,52,36,"
                "
760 PUT 22,52,57,"Cash    ":?;A1$
770 REM *Too much cash offered?*
780 IF CASH <=99.99 THEN 830
785 REM *erase previous entry - 30 bla
nks*
790 PUT 22,52,57,"
              "
800 PUT 22,52,36,"Too much. Try again
   "
810 GOTO 650
820 REM *Calculate change*
```

(listing continued on next page)

(continued from previous page)

Radiovision program, but it can be used on its own to supplement work on computers in shops — see figure 2. It is written for a Research Machines 380-Z or 480-Z and simulates a POST used in British Home Stores. It occupies about 4K.

Pupils choose four items from the list in figure 3 and key in the code numbers. The screen displays the code, the item description and its price. It totals the prices and asks for the amount of cash tendered; the maximum allowed is £99.99. The amount of change due is displayed and an itemised receipt is printed — see figure 4. The program checks for illegal code numbers, too much or too little cash, alphabetic instead of numeric input, and adds trailing zeros. In order to do all this code numbers and cash are entered as strings.

Twenty items are included in the data. This can be increased or decreased as required. The code numbers are random numbers as generated by a 380-Z. They could be improved by making the first two or three digits represent a particular department and the last a check digit.

Variable	Description	Variable	Description
CL)	item code number, six digit	C1$	inut code number
I$( )	item name	T	total of goods purchased
P$( )	item price	T$( )	item } stored here
A$	wait/trap key presses	T1$( )	price } ready for
D$	date	T( )	code } printing
B1 }		L }	temporary store used in
C }	loop counters	A1$ }	trailing zero routine
Z }		CASH$	amount of cash tendered
X,Y	co-ordinates of item on screen	CASH	value of CASH$
ZX	count: if 1 erase incorrect entry	CH	change to be given

(listing continued from previous page)

```
830 CH=CASH-T
840 REM *Remove any rounding errors*
850 CH=INT((CH+.001)*100)/100
860 IF CH<.01 AND CH>=.009 THEN CH=.01
:GOTO 910
880 REM *Check for too little cash*
890 IF CASH<T THEN PUT 22,52,36,"Not e
nough cash. Try again
    " ELSE 910:REM *22 blanks*
900 PUT 22,52,65:INPUT"",CASH$:GOTO 68
0
910 PUT 22,53,65,"------"
920 IF CH<1 THEN CH$=STR$(CH):CH$=LEFT
$(CH$,4):CH=VAL(CH$)
930 REM *Add trailing zeros etc*
940 REM *Output change in correct posi
tion*
950 L=CH:GOSUB 1350
960 IF LEN(A1$)=5 THEN A1$=" "+A1$
970 PUT 22,54,57,"Change ",A1$
980 PUT 22,55,65,"------"
990 REM *Print receipt*
1000 LPRINT"The Walsingham Superstore"
1010 LPRINT:LPRINT"Receipt    ";D$
1020 LPRINT
1030 FOR C=1 TO 4
1040 LPRINT T(C);TAB(10);T$(C);TAB(27)
;"1";
1050 IF LEN(T1$)=6 THEN LPRINT TAB(30)
;T1$(C) ELSE LPRINT TAB(31);T1$(C)
1060 NEXT C
1070 LPRINT
1080 L=T
1090 GOSUB 1350
1100 LPRINT TAB(20);"Total";TAB(27);"£
";
1110 IF LEN(A1$)=6 THEN LPRINT TAB(30)
;A1$ ELSE LPRINT TAB(31);A1$
1120 LPRINT
1130 L=CASH
1140 GOSUB 1350
1150 LPRINT TAB(21);"Cash";TAB(27);"£"
;
1160 IF LEN(A1$)=6 THEN LPRINT TAB(30)
;A1$ ELSE LPRINT TAB(31);A1$
1170 LPRINT
1180 L=CH
1190 GOSUB 1350
1200 LPRINT TAB(19);"Change";TAB(27);"
£";
1210 IF LEN(A1$)=6 THEN LPRINT TAB(30)
;A1$ ELSE LPRINT TAB(31);A1$
1220 LPRINT
1230 LPRINT" Thank you for your custom
"
1240 LPRINT
1250 LPRINT" Please call again"
1260 LPRINT:LPRINT:LPRINT
1270 PUT 12
1280 ?"Take your receipt"
1290 ?:?:?"----------------------------
-------------":?:?
1300 A$=GET$(200):?:?
1310 ?"Is there another customer? (Y/N
) ":A$=GET$(0):A$=GET$()
1320 IF A$="Y" OR A$="y" THEN 250
1330 IF A$="N" OR A$="n" THEN 1660 ELS
E PUT 11:GOTO1310
1340 REM *Subroutine for adding traili
ng zeros
1350 A1$=STR$(L):L1=LEN(A1$):J=INT(L)
1360 IF L1>=6 THEN 1430
1370 IF L1=5 AND MID$(A1$,3,1)<>"." TH
EN A1$=A1$+"0":GOTO 1430
1380 IF L1=4 AND J=0 THEN A1$=" 0"+RIG
HT$(A1$,3) :GOTO 1430
1390 IF L1=4 THEN A1$=A1$+"0":GOTO1430
1400 IF L1=3 AND MID$(A1$,2,1)="." THE
430
1420 IF L1=2 THEN A1$=A1$+".00"
1430 RETURN
1440 REM *Data - code no, item, price*
1450 DATA 943303,plug," 0.45"
1460 DATA 185233,toothpaste," 0.39"
1470 DATA 246717,shampoo," 0.40"
1480 DATA 243304,blouse," 4.75"
1490 DATA 683303,sports bag," 5.99"
1500 DATA 421096,light bulb," 0.25"
1510 DATA 174603,shoes,12.99
1520 DATA 276508,gloves," 3.00"
1530 DATA 191949,socks," 0.57"
1540 DATA 691307,lamp," 4.99"
1550 DATA 705869,clock,12.99
1560 DATA 636274,annual," 1.50"
1570 DATA 837350,football book," 2.25"
1580 DATA 697261,doll," 3.75"
1590 DATA 653692,shirt," 6.50"
1600 DATA 366890,scarf," 4.20"
1610 DATA 605466,handkerchief," 0.30"
1620 DATA 504696,nightdress," 8.50"
1630 DATA 804379,toy car," 1.75"
1640 DATA 382036,pyjamas," 6.30"
1650 REM *Finished*
1660 PUT 12,23
1670 END
```

Postcode sort key

Geographical location is the key to sorting your sales information, says John Locke.

I RECENTLY had to write a program to deal with responses to sales enquiries for a large engineering firm. Among other information the reply was to include the names of a local dealer, the area sales representative and satisfied users of the equipment in the area. Clearly a geographical key was required to identify which dealers, reps and users were most appropriate.

Most business letters include the postcode in their address, which can form the basis of a geographical sort. Reading from left to right, the structure of the postcode is as follows:

- one or two alpha characters denoting the area; there are 120 areas in the U.K.
- one or two numeric characters followed by a space, to specify the district; there are 2,700 districts in the U.K.
- one numeric character to specify a sector; there are 8,900 sectors in the U.K.
- two alphabetic characters to denote a street or part of a street; there are 1.5 million in the U.K.
- occasionally the district code contains an alpha as well as a numeric character before the space.

This somewhat flexible construction of the postcode requires care in programming to ensure that as many errors as possible in operator entry are catered for. Figure 1 shows a flowchart for a simple basic program for entering postcodes. Each character is examined as it is entered and is accepted or rejected as appropriate.

The only operator instruction that has to be given is to insert a space to denote the end of the first section of the postcode if it contains only one numeric character; the space is inserted automatically if it contains two numerics. The postcode, area, district, sector and street are stored as strings C$(1), C$(2), C$(3), C$(4) so that further validation can take place and to simplify their use as sorting keys.

In the simplest case the post area is sufficient as a first sort key. If a large number of disc-stored records have to be processed, then selection rather than sorting will increase the speed of operation by up to N/n, where N is the total number of items and n is the average number selected. The 120 area codes can be stored as an array in the program, so that CY$(1) is AB and CY$(120) is ZE.

Random-access disc files are also set up for postcode cross-reference, dealer information rep information, satisfied user information and product information. The postcode cross-reference file has record numbers corresponding to the postcode array number in memory. Each record contains the record numbers of dealers covering that area, and the rep for the area. It is assumed that there are no more than three satisfied users in each area.

An operator who wishes to input an enquiry selects from the main menu and then enters the product number and the postcode of the enquiry. Product details are accessed directly from the product number. The area part of the postcode C$(1) is then matched to the array CT$(X) by:

```
FOR X = 1 TO 120: IF C$(1) < > CY$(X)
  THEN NEXT X
```

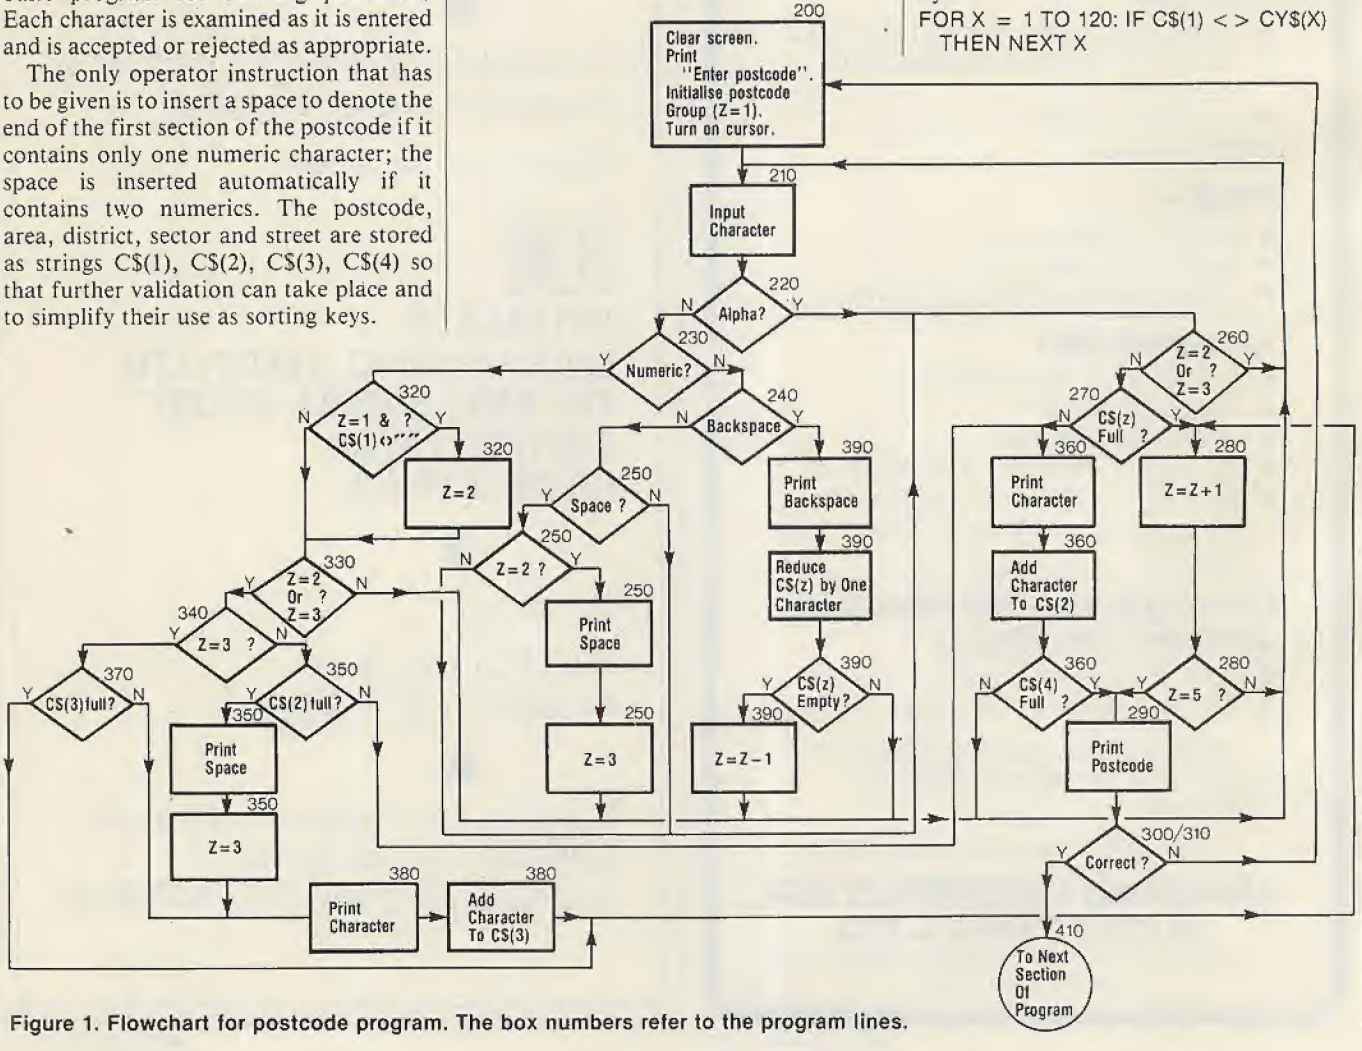

Figure 1. Flowchart for postcode program. The box numbers refer to the program lines.

The loop is exited with the match number X, which is then used to access directly the postcode record. This in turn is used to access the rep information and all relevant dealer information. Up to three satisfied users are always used for an area, so the Satisfied Users file can be accessed for record numbers from 3X — 2 to 3X.

In this simple example, a printout can be made of enquiry number, postcode, all applicable dealers, names and addresses together with further selection information such as their sales and credit ratings, exclusion from certain products, etc., and up to three satisfied users' names and addresses. This list can be pinned to the original enquiry letter for the sales staff to make their selection of one dealer and one user. Alternatively, further automatic selection can take place. In either case, to output a sales letter only the enquirer's name and address — if not already stored — the product, dealer, rep and user numbers need to be inserted.

While the dealer file is being constructed, the postcodes covered by each dealer have to be inserted in the postcode cross-reference file so that these, through the array match, will write the dealer number in the first vacant field of that postcode record. Amendment and deletion of dealer records must also access and modify these fields. The whole process is complex but routine. It slightly slows entry, amendment or deletion of dealer data, but is not a significant overhead as sales enquiries are answered more often than records are updated.

A great deal of detail is available from the Post Office on postcodes, ranging from the complete address file on magnetic tape for £15,000 down to publications on post towns, valid sectors, etc. Magnetic-tape file extracts are available from £4.75 per thousand records, subject to minimum charges. Post zone files of codes and Ordnance Survey grid references are available from £6,000 on tape. Postcode maps are available from J Bartholomew & Sons Ltd, Geographia Ltd, and Postal Headquarters.

There are also advantages in sorting outgoing mail when bulk posting is used. The Post Office gives a rebate on bulk posting of second-class mail that has been pre-sorted according to post code. For example, 5,000 to 23,529 letters are given a 15 percent rebate on the postage paid if they are pre-sorted. These levels are shown in the Inland Compendium held by main post offices.

The level of rebate is dependent not only on the total number of letters mailed but also on the amount of pre-sorting carried out. A booklet will be available shortly from regional offices and head postmasters giving more details. The Post Office's Post Code Marketing Section emphasise the importance of involving the local Post Office in proposals for bulk posting at an early stage.

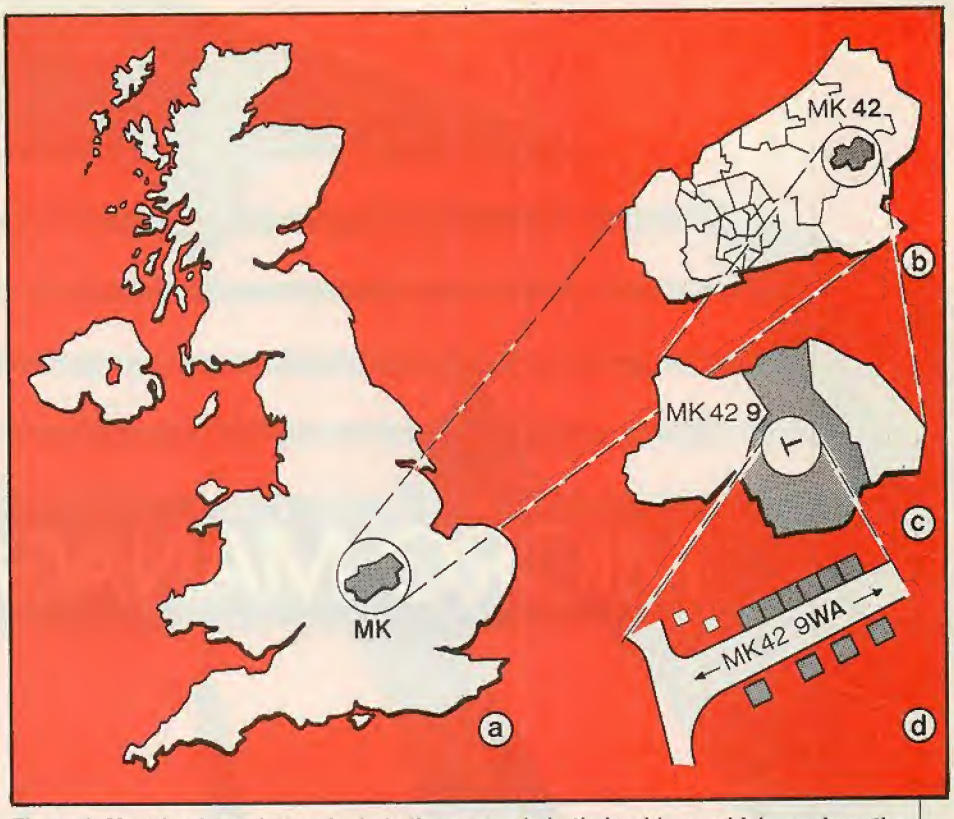

Figure 2. Most business letters include the postcode in their address which can form the basis of a geographical sort.

Postcode listing.

```
200 CLS:PRINT"ENTER POSTCODE":Z=1:
PRINTCHR$(14):FORX=1TO4:C$(X)="":NEXTX
210 Z$=INKEY$:IFZ$=""THEN210
220 IFASC(Z$)>64ANDASC(Z$)<91THENGOTO260
230 IFASC(Z$)>48ANDASC(Z$)<58THENGOTO320
240 IFZ$=CHR$(8)THENGOTO 390
250 IFZ$=CHR$(32)ANDZ=2THENZ=3:PRINTZ$;:
GOTO210
260 IFZ=2ORZ=3THENGOTO210
270 IFLEN(C$(Z))<>2THENGOTO360
280 Z=Z+1:IFZ<>5THENGOTO210
290 PRINT:PRINT"POSTCODE= ";C$(1)+C$(2)
+CHR$(32)+C$(3)+C$(4)
300 INPUT"IS THIS CORRECT";K$:IFK$="Y"
THENK=1ELSEIFK$="N"THENK=2ELSEPRINT"ENTER
'Y' OR 'N'  ONLY":GOTO300
310 ONKGOTO410,200
320 IFZ=1ANDC$(1)<>""THENZ=2
330 IFZ<>2ANDZ<>3THENGOTO210
340 IFZ=3THENGOTO370
350 IFLEN(C$(2))>1THENPRINTCHR$(32);:Z
=3:GOTO380
360 PRINTZ$;:C$(Z)=C$(Z)+Z$:IFLEN(C$(4))
=2THENGOTO290ELSEGOTO210
370 IFLEN(C$(3))>0THENGOTO280
380 PRINTZ$;:C$(3)=C$(3)+Z$:GOTO280
390 PRINTCHR$(8);:X=LEN(C$(Z)):IFX-1=0
THENC$(Z)="":Z=Z-1:GOTO210
400 C$(Z)=LEFT$(C$(Z),X-1):GOTO210
410 END
```

BBC:

HARDWARE

A full colour 32k ROM computer with 7 text and graphic modes up to 640 × 256 graphics and 80 column text screen, extended microsoft basic, built-in assembler, 1 MHz and tube interface, sideways ROM, RS423, A/D converter.

BBC Model B
PRICE £399

BBC Model B+ Econet
PRICE £446

BBC Model B+ Disk Interface (fitted)
PRICE £469

BBC Model B+ Disk Interface+ Econet (fitted)
PRICE £516

PROFESSIONAL WORD PROCESSING PACKAGE

BBC computer with disk interface, 100K disk drive, green screen monitor, daisy wheel printer, word processing ROM, complete with all cables, manuals, paper and formatting disk.
PRICE £1299

● Circle No. 174

THIS MONTH'S FEATURE:

STAR DP 510

£275

The most cost effective quality matrix printers to be launched this year

- ✱Friction and tractor feed plus roll holder as standard
- ✱100 cps
- ✱Bidirectional logic seeking
- ✱9 x 9 matrix—true descenders
- ✱2.3K buffer as standard
- ✱Hi-res bit image + block graphic printing modes
- ✱Sub and superscripts
- ✱Italic printing
- ✱Auto underlining
- ✱2K user definable ROM
- ✱Vertical and horizontal tabulation
- ✱Left and right margin set
- ✱Skip over perforation
- ✱Back space
- ✱Self test

SHINWACTI CP80

£299

- ✱Friction and tractor feed as standard
- ✱80 cps
- ✱Bi-directional logic seeking
- ✱True descenders
- ✱Hi-res bit image + block graphic printing modes
- ✱Sub and superscripts
- ✱Italic printing
- ✱Auto underlining
- ✱Condensed and emphasised printing
- ✱Expanded and double strike printing
- ✱Compact lightweight design

ORIC

16–48K, colour, high resolution graphics 240 × 200, text 28 + 40, pre-programmed sound, user-defined keyboard/graphics, non touch-sensitive keyboard, microsoft type basic with powerful extensions, RGB/UHF, standard cassette interface, parallel printer output, several periferals available, printers available, modems and PRESTEL (coming).

ORIC–1 48K
PRICE £139.95

ORIC–1 16K
PRICE £ TELEPHONE

ORIC SOFTWARE SEND FOR LIST

COMMODORE

COMMODORE 64–64K RAM, colour, sophisticated ROM/RAM user, full business applications, disk drives available, sound, UHF/composite video, proven basic language, exceptional value, high resolution graphics, many "add-ons" available, printers.

COMMODORE SOFTWARE SEND FOR LIST

COMMODORE 64
PRICE £229.00

CASSETTE UNIT
PRICE £44.95

DISK DRIVE 1541
PRICE £229.00

PRINTER 1515
PRICE £230.00

JOYSTICK 1311
PRICE £7.50

PADDLES 1312
PRICE £13.50

SPECIAL OPPORTUNITY

£3 OFF PURCHASES OVER £75

Use this coupon to get even better value at your local Big 'M' distributor. Check our list for your nearest store.

£3 off

This coupon can be used at any official Micro Management distributor. The bearer is entitled to a £3 reduction on purchases over £75. Only one coupon per person can be redeemed.
Valid until 30 November 1983.
Micro Management, 16 Princes St, Ipswich.
PC

● Circle No. 175

DRAGON

DRAGON 32

32K RAM, colour, extended basic, sound 5 octaves 255 tones, vast software range, typewriter keyboard, standard cassette drive, high resolution graphics, 256 × 192, text 16 + 32, looks like a British worldbeater.

PRICE £174.99

DRAGON SOFTWARE– SEND FOR LIST

JUPITER

JUPITER ACE

3K RAM, the Forth specialist, basic coming, Forth language excellent, for serious educational and scientific purposes, standard cassette.

PRICE £69.95

64K RAM, colour, basic, almost "Apple compatible".

PRICE £201.25

JOYSTICKS

PRICE £10.35

KEYBOARD

PRICE £44.85

at the sign of the BIG M

LYNX



LYNX 48

48K standard, expandable to 192K, colour, 57 key typewriter keyboard, CP/M compatible, serial port, high resolution graphics 265 × 248, digital/analogue sound converter, RGB/UHF composite video, RS232/parallel, cassette.

PRICE £224.99

LYNX 96K

PRICE £299.00

JOYSTICK INTERFACE

PRICE £13.95

SERIAL INTERFACE

PRICE £3.99

CENTRONICS INTERFACE

PRICE £49.95

ATARI

16K/48K RAM, colour, basic, high resolution 320 × 192, excellent games machine from the video market leaders, text 24 + 40, serious software for education and business now available.

ATARI 800

PRICE £299.95

ATARI 400

PRICE £149.95

ATARI DISK DRIVE

PRICE £299.00

DISK DRIVES

100K SINGLE

PRICE £201.25

200K SINGLE

PRICE £241.50

400K SINGLE

PRICE £396.75

800K DUAL

PRICE £711.85

at the sign of the BIG M

SINCLAIR

SPECTRUM

16K and 48K, basic, colour, text and graphics, vast range of software including education, printer, built-in speaker. You can build a very good system at a very good price.

ZX SPECTRUM 48

PRICE £129.95

ZX SPECTRUM 16

PRICE £99.95

ZX81

1K RAM, world's largest-selling computer, 16K expansion pack, masses of software, basic language, many expansions including keyboard/memory/printer, high resolution graphics.

PRICE £39.95

16K RAM

PRICE £29.95

ZX PRINTERS (NO PSU)

PRICE £39.95

SINCLAIR SOFTWARE– SEND FOR LIST

COLOURGENIE

16K RAM, colour, full size keyboard, high resolution graphics, semi-compatible with TRS80.

COMPUTER

PRICE £193.99

PRINTER INTERFACE

PRICE £38.49



WORK STATION

Designed to take computer, disk drive, printer and paper. Robustly built for school, business or home use.

PRICE £138.00

at the sign of the BIG M

GIFT VOUCHERS

Want to buy a present but don't know exactly what to get?

Big 'M' Gift Vouchers are the answer, in £5, £10 £20 denominations. Available at your local Big dealer—check our list for your local store

PRINTERS

SEIKOSHA GP100
PRICE £214.99

SEIKOSHA GP250
PRICE £276.00

NEC PC 8023 (D/M)
PRICE £368.00

EPSON MX100
PRICE £488.75

EPSON RX-80
PRICE £339.25

EPSON FX-80 160cps
PRICE £454.25

SPARK JET PRINTER
PRICE £419.75

SMITH CORONA D/WHEEL
PRICE £511.75

TEC STARWRITER 40cps
PRICE £1265.00

JIUK 6100 D/WHEEL
PRICE £458.85

STAR MUP4 GRAPHICS
PRICE £171.35

MONITORS

RGB COLOUR STD/RES
PRICE £287.50

RGB COLOUR H/RES
PRICE £632.50

12″ GREEN MONITOR
PRICE £95.52

12″ AMBER MONITOR
PRICE £120.75

Think you're good enough to become a Big 'M' distributor? Full back up given. Write for details and application forms to

Steve Macfarlane
Micro Management
16 Princes St, Ipswich
Tel: (0473) 219461

MICRO MANAGEMENT

Head Office: 16 Princes St, Ipswich 0473 219461

AGENTS

Abergele
Abergele Computer Centre
8 Water St. 0745 826234

Ballymoney
Everyman Computers
Charlotte St. 02656 62116

Bedford
The Software Centre
52a Bromham Rd 0234 44733

Birmingham
The Software Centre
80 Hurst St, B5 021 622 2696

Blackburn
Microwise, Conliffe Road
Whiteburch Estate 0254 678933

Bodmin
Microtest Ltd
18 Normandy Way 0208 3171

Bridgend
Automation Services
31 Wernlys Rd, Penyfai 0656 720959

Bristol
Brensall Computers Ltd
24 Park Row 0272 294188

Bromley
Datastore
6 Chatterton Rd. 01 460 8991

Bury St Edmunds
Bury Computer Centre
Guildhall St. 0284 705772

Cambridge
GCC (Cambridge) Ltd
66 High St, Sawston 0223 835330

Chelmsford
Essex Computer Centre
Moulsham St. 0245 358702

Clacton-on-Sea
Clacton Computer Centre
Pier Avenue 0255 422644

Colchester
Emprise Ltd
58 East St. 0206 865926

Coventry
Coventry Micro Centre
33 Far Gosford St. 0203 58942

Gloucester
The Model Shop
79 Northgate St. 0452 410693

Great Yarmouth
Criterion Computers
12 George St. 0493 53956

Guildford
The Model Shop
23 Swan Lane 0483 39115

Hastings
The Computer Centre
37 Robertson St. 0424 439190

Hay-on-Wye
The Playpen
Market St. 0497 820129

Hemel Hempstead
Faxminster
25 Market Square 0442 55044

Holyhead
P & K Computers
33 Williams St. 0407 50283

Hull
Computer Centre (Humberside)
26 Anlaby Rd. 0482 26297

Ilfracombe
Bits & Bytes
44 Fore St. 0271 62801

Ipswich
Micro Management
32 Princes St. 0473 59181

Kingston-on-Thames
Vision Store
3 Eden Walk 01 549 4900

Lichfield
Fosters
59 Tamworth St. 05432 22341

Liverpool
Beaver Radio
20/22 Whitechapel 051 709 9898

London
Computers of Wigmore St.
87 Wigmore St, W1 01 486 0373

Percivals
85 High St North, East Ham, E6
01 472 8941

Trend Video & Hi Fi
167 High St, E17 01 521 6146

Northampton
Richard Reeves
174 Kettering Rd 0604 33578

Norwich
Richard Pank
Anglia Square 0603 27963

Plymouth
Syntax Ltd
46 Cornwall St 0752 28705

The Model Shop
11 Old Town St. 0752 21851

Shetland
Tomorrows World
Esplanade, Shetland 0595 2145

Southend-on-Sea
Estuary Software
261 Victoria Ave. 0702 43568

Stevenage
Video City
45/47 Fisher Green Rd. 53808

Stroud
The Model Shop
22 High St. 04536 5920

Surbiton
Computasolve
8 Central Parade, St Marks Hill
01 390 5135

Taunton
LA Gray
1 St James St. 0825 72986

West Bromwich
Bell & Jones
39 Queens Square, Sandwell Centre
021 553 0820

Woking
71 Commercial Way
04862 25657

at the sign of the BIG

MicroValue 80-BUS MULTIBOARDS



GM813—CPU/64K RAM Board

* 4MHz Z80A C.P.U.
* 64K Dynamic RAM
* RS232 Interface
* Two 8-Bit I/O Ports
* Cassette Interface
* Extended & Page Addressing Modes
* CP/M Compatible Monitor

£225



GM829—Disk Controller Board

* Up To 4 Mixed 5.25 & 8" Drives
* SASI Hard Disk Interface
* Single & Double Density Operation
* Single & Double Sided Drive Support
* Supports 48 and 96 TPI Drives

£145



GM833—RAM-DISK Board

* Virtual Disk Operation
* 512K Dynamic RAM
* Port Mapped For Easy Interface Software
* Over 10 Times Faster Than a Floppy Disk

£450

Please note: This board cannot be used as a conventional RAM board



GM812—Video Controller Board

* 80 Characters x 25 Line Display Format
* On-board Z80A Microprocessor
* Buffered Keyboard Input
* Programmable Character Generator
* 160x75 Pixel Graphics
* Light Pen Input

£125



GM816—Multi I/O Board

* 6 I/O Ports
* 4 Counter/Timer Channels
* On-Board Real Time Clock
* Battery Backup
* Further Expansion Capability

£125

PLUTO—Colour Graphics Board

* On-Board 16 Bit Microprocessor
* 640x576 Bit Mapped Display
* 192K Of Dual Ported RAM
* Comprehensive On-Board Software

£399

CLIMAX—Colour Graphics Board

* 256x256 Pixel Display
* 16 Colours
* Ultra-fast Vector & Character Generation
* Light Pen Input
* UHF or RGB Outputs

UHF Version **£199**

UHF & RGB Version **£220**

GM811—CPU Board

* 4MHz Z80A CPU
* 4 'Bytewide' Memory Sockets
* 2x8-Bit Input/Output Ports
* 8 Bit Input Port
* RS232 Serial Interface
* Cassette Recorder Interface

£125

GM803—EPROM/ROM Board

* Up to 40K of Firmware
* 2708 or 2716 EPROMS
* Page Mode Operations

£65

GM802—64K RAM Board

* 64K Dynamic RAM
* 4MHz Operation
* RAM Disable Function
* Page Mode Operation

£125

MP826—Static RAM Board

* 32K Static RAM
* Battery Backup
* Page Mode Operation

£185

EV814—IEEE488 (GPIB) Controller

* Cost Effective Controller
* Comprehensive Software Supplied
* Full Implementation
* Easy To Use

£140

GM827—87 Key Keyboard

* User Definable Function Keys
* Numeric Keypad
* Cursor Control Keys

£85

GM839—Prototyping Board

* Fibreglass P.C.B.
* 80-BUS Signal Identification
* High Density IC Capability

£12.50

All the boards and components in the 80-BUS range are fully compatible and offer a very flexible and cost effective solution to your computer needs. For further information about the 80-BUS range contact your nearest MICROVALUE dealer.

MicroValue - MicroValue

COMPUTERS

Gemini Galaxy 2

"I would place the Galaxy at the top of my list"
(Computing Today, April 1983)

- ★Twin Z80A Processors
- ★CP/M 2.2 Operating System
- ★64K Dynamic RAM
- ★800K Disk Capacity
- ★80x25 Video Display
- ★Serial and parallel printer interfaces
- ★Cassette and light pen interfaces
- ★User definable function keys
- ★Numeric key pad
- ★12" Monitor included

£1495

At last—a Winchester Drive for your Gemini / nascom System!

GM835 Winchester Drive Sub-system.

- ★5.4 Megabyte Formatted Capacity
- ★Rodime Drive
- ★Industry Standard SASI interface
- ★Integral Controller and power supply

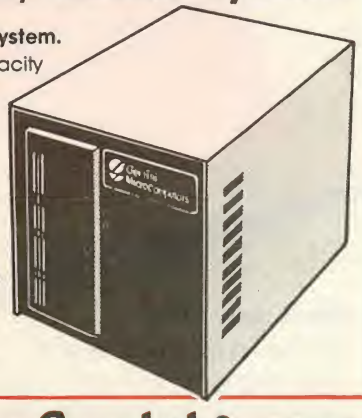

£1450

Phoenix P12 Monitor

A high quality data display monitor, ideal for all Nascom and Gemini systems.
20MHz resolution.
Available in amber or green phosphor.

£110

Disk System for Gemini & nascom

GM825 Disk Drive Unit – The GM825 floppy disk housing is supplied with either one or two 5.25" single sided, double density, 96TPI high capacity Micropolis 1015F5 disk drives. These provide 400K bytes of formatted storage per drive. (Gemini QDSS format). The CP/M2.2 package available supports on-screen editing with either the normal Nascom or Gemini IVC screens, parallel or serial printers.
An optional alternative to CP/M is available for Nascom owners wishing to support existing software.
Called POLYDOS 4, it includes an editor and assembler and extends the Nascom BASIC to include disk commands.



Single Drive System GM825-1S **£350**
Dual Drive System GM825-2S **£575**
CP/M2.2 Package (GM 532 for Gemini) **£90**
POLYDOS 4 for Nascom **£90**

SOFTWARE



CP/M Software Compas

is totally different from other compiler based Pascal systems, as it allows you to create, edit, run, and debug Pascal programs in a highly interactive manner.

£120

'The Last One'

is used in conjunction with Microsoft's MBASIC*. No knowledge of BASIC programming is required since all input is performed using question and answer routines written in plain English.

£330

*MBASIC—MicroValue Price if purchased with 'The Last One' **—£178.95 Inc.VAT**

Gemini Software: (All prices ex-VAT).

GEM PEN Text Editor	£45
GEM ZAP Assembler	£45
GEM DEBUG Debugging Utility	£30
WORDSTAR Word Processor	£295
GEM GRAPHIC Links with MBASIC	£35

BUY FROM THE COMPUTER PROFESSIONALS

MICROVALUE DEALERS:

AMERSHAM, BUCKS
Amersham Computer Centre,
18 Woodside Road,
Tel: (02403) 22307

BRISTOL
Target Electronics Ltd., 16 Cherry Lane.
Tel: (0272) 421196

EGHAM, SURREY
Electrovalue Ltd.,
28 St. Judes Road, Englefield Green.
Tel: (07843) 3603

IPSWICH
MDW (Electronics),
47/49 Woodbridge Road East.
Tel: (0473) 78295

LEEDS
Bits & PC's, Leeds Computer Centre,
62 The Balcony, Merrion Centre,
Tel: (0532) 45887

LONDON W2
Henry's Radio, 404 Edgware Road.
Tel: 01-402 6822

LONDON SW11
OFF Records,
Computer House, 58 Battersea Rise,
Clapham Junction.
Tel: 01-223 7730

MANCHESTER M19
EV Computing, 700 Burnage Lane.
Tel: 061-431 4866

NOTTINGHAM
Computerama, (Skytronics Ltd.)
357 Derby Road.
Tel: (0602) 781742

Telephone orders welcome

MicroValue

REAL value — from the Professionals

● Circle No. 177

WHEN IT COMES TO MICROCOMPUTER SOFTWARE WE WROTE THE BOOK

How do you stay up-to-the-minute with the rapidly changing world of microcomputer software? Get the Lifeboat Catalogue.

The latest innovations The new Lifeboat Catalogue is packed with the latest state-of-the-art software. And if we publish a new program after the latest catalogue has gone to press, we enclose a flash bulletin in your copy.

The greatest selection Because Lifeboat is the world's largest publisher of microcomputer software, our catalogue offers you the greatest selection of programs for business, professional and personal use. Our more than 200 programs range from the integrated accounting and professional practice systems to office tools for book-keepers and secretaries to sophisticated tools for programmers. Included are business systems, word processors, programming languages, database management systems, application tools and advanced system utilities.

We specialise in software that runs on most small business computers. Our more than 60 media formats, including floppy disks, data cartridges, magnetic tape and disk cartridges, support well over 100 different types of computer.

Get full service We give the crucial dimension of after-sales service and full support to everything we sell.

That includes:

- An update service for software and documentation.
- Telephone, telex and mail-order services in the London office and at overseas offices in the United States, France, Switzerland, West Germany and Japan.
- Subscriptions to Lifelines,™ the monthly magazine that offers comparative reviews, tips, techniques, identified bugs and updates that keep you abreast of change.

Get it now Lifeboat now serves tens of thousands of satisfied customers with our breadth of up-to-date, fully tested, fully supported and competitively priced software.

You may not need all we offer, but we offer just what you need. After all, we wrote the book.

Lifeboat Associates

World's foremost software source

Mail coupon to: Lifeboat Associates
PO Box 125, London WC2H 9LU or call 01-836 9028

☐ Please send me a free lifeboat catalogue.

Name

Title

Company

Address

Postcode

Lifeboat Worldwide offers you the world's largest library of software. Contact your nearest dealer of Lifeboat.

USA Lifeboat Associates 1651 Third Ave. New York NY 10028 Tel (212) 860-0300 Telex 640693 (LBSOFT NYK) TWX 710 581-2524 **JAPAN** Lifeboat Inc. OK Bldg. 5F 1-2-8 Shiba-Daimon Minato-ku Tokyo 105 Japan Tel 03-437-3901 Telex 2423296 (LBJTYO) **ENGLAND** Lifeboat Associates Ltd PO Box 125 London WC2H 9LU England Tel 01-836 9028 Telex 893709 (LBSOFTG) **SWITZERLAND** Lifeboat Associates GmbH Hinterbergstrasse Postfach 251 6330 Cham Switzerland Tel 042-36-8686 Telex 865265 (MICO CH) **W GERMANY** Intersoft GmbH Schlossgartenweg 5 D-8045 Ismaning W. Germany Tel 089-966-444 Telex 5213643 (ISOFD) **FRANCE** Lifeboat Associates SARL 10 Grande Rue Charles de Gaulle 92600 Asnieres France Tel 1-733-08-04 Telex 250303 (PUBLIC X PARIS)

● Circle No. 178

Open File

This regular section of *Practical Computing* appears in the magazine each month, incorporating Tandy Forum, Apple Pie, Sinclair Line-up and other software interchange pages.

Open File is the part of the magazine written by you, the readers. All aspects of microcomputing are covered, from games to serious business and technical software, and we welcome contributions on CP/M, BBC Basic, Microsoft Basic, Apple Pascal and so on, as well as the established categories.

Contributors receive £30 per published page and pro rata for part pages, with a minimum of £6. Send contributions to: Open File, *Practical Computing*, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

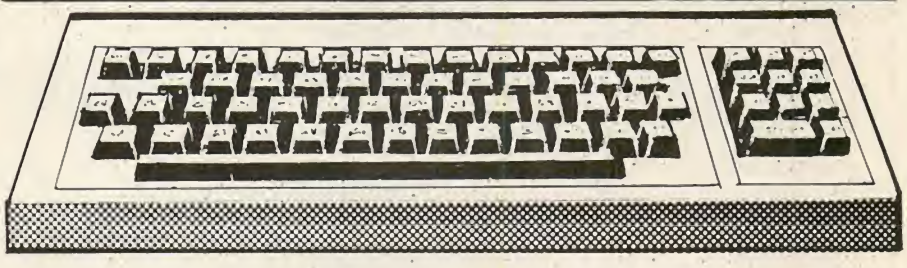

Guidelines for contributors

Programs should be accompanied by documentation which explains to other readers what your program does and, if possible, how it does it. It helps if documentation is typed or printed with double-line spacing — cramped or handwritten material is liable to delay and error.

Program listings should, if at all possible, be printed out. Use a new ribbon in your printer, please, so that we can print directly from a photograph of the listing and avoid typesetting errors. If all you can provide is a typed or handwritten listing, please make it clear and unambiguous; graphics characters, in particular, should be explained.

PLEASE send a cassette or disc version of your program if at all possible. It will be returned after use. For CP/M programs use IBM-format 8in. floppy discs.

BBC BYTES

by John Harris

Sequencer

Adrian Roe of Ilkley, whose Lightcycle game was published on page 164 of the May issue, has submitted a program which I cannot claim to understand for all my efforts to do so. The program, I am told, transforms my machine into a sequencer with key, octave, tempo and bass control over a basic note pattern input as data at line 220.

Since the program uses the negative Inkey feature, interesting effects can be produced by holding down more than one key. Try holding the speed-up and pitch keys together, for example.

Sequencer.

```
   10 REM***SEQENCER BY A.ROE JAN'83
***
   20 REM********VERSION 0.2*********
***
   30 MODE2
   40 VDU23;8202;0;0;0;
   50 PROCINIT
   60 PROCKEYS
   70 RESTORE
   80 READPIT:IFPIT=1000 GOTO70
   90 IFINKEY(-122) BASS=BASS+48:SOU
ND2,2,BASS,1:SOUND3,2,BASS,1
  100  IFINKEY(-26) BASS=BASS-48:SOU
ND2,2,BASS,1:SOUND3,2,BASS,1
  110 IFINKEY(-54) KEY=KEY+4:BASS=BA
SS+4:SOUND2,2,BASS,1:SOUND3,2,BASS,1
  120 IFINKEY(-51) KEY=KEY-4:BASS=BA
SS-4:SOUND2,2,BASS,1:SOUND3,2,BASS,1
  130 IFINKEY(-103) TEMPO=TEMPO+1
  140 IFINKEY(-104) TEMPO=TEMPO-1
  150 IFINKEY(-58) OCT=OCT+48
  160 IFINKEY(-42) OCT=OCT-48
  170 SOUND0,-10,4,1:SOUND1,1,PIT+OC
T+KEY,1
  180 TIME=0:REPEAT UNTIL TIME>=TEMP
O
  190 IFINKEY(-82)ANDPIT=9 THENTIME=
0:REPEAT UNTIL TIME>=200:GOTO240
  200 GOTO80
  210 REM***NOTE SEQUENCE**
  220 DATA9,37,49,57,49,37,29,37,100
0
  230 REM***FINISH WITH 1000**
  240 MODE7
  250 *FX15,0
  260 SOUND2,0,0,0:SOUND3,0,0,0
  270  END
  280 DEFPROCINIT
  290 VDU23,230,8,4,2,255,2,4,8,0
  300 VDU23,231,16,32,64,255,64,32,1
```

(listing continued on next page)

VDU23 definition

Following on from Mr P Davidson's eight-by-eight pixel manipulation program — published on page 136 of the February issue — this implementation by John Wilson of Benfleet, Essex provides far wider facilities. Up to 40 characters may be defined at a time on a cross-linked 10-by-four set of eight-by-eight pixels.

The resulting character definitions may be inverted from black to white and vice versa, Spooled for *Exec retrieval into a Basic source program, edited, and viewed in any mode. It is difficult to think of anything missing from the functions.

Operating instructions are written into the program, with a function-select screen and subsequent prompts. The pixel map is represented as a grid of dots and an X cursor which is moved by the cursor-control keys. Pixels are selected with Copy and deleted with Delete. An agreeable feature is that the cursor controls can be held concurrently with select and deselect, providing rapid spreading or removal of lines in any of the eight cardinal directions.

If you have OS 0.1 you will not be able to employ the full 10 by four generated character set in your own Basic programs as no provision is made within the OS to "explode" the memory allocation for user-defined characters. OS 1.0 and above does cater for this, as shown on pages 427 and 428 of the *User Guide* under *FX20.

(listing continued from previous page)

```
6,0
  310 VDU23,232,16,56,84,146,16,16,1
6,0
  320 VDU23,233,16,16,16,146,84,56,1
6,0
  330 ENVELOPE2,1,0,0,0,0,0,0,127,0,
0,0,75,75
  340 ENVELOPE1,1,0,0,0,0,0,0,127,-1
0,-10,-1,126,60
  350 OCT=0:BASS=9:TEMPO=16:KEY=0
  360 UD$=" = DOWN - UP = "
  370 ENDPROC
  380 DEFPROCKEYS
  390 COLOUR1
  400 PRINTTAB(3,1)"TEMPO CONTROL"TA
B(1,4)"<";UD$;">":PROCLINE(5)
  410 COLOUR2:PRINTTAB(2,7)"SEQUENCE
 CONTROL"TAB(1,10)CHR$233UD$CHR$232:
PROCLINE(11)
  420 COLOUR3:PRINTTAB(4,13)"BASS CO
NTROL"TAB(1,16)CHR$231UD$CHR$230:PRO
CLINE(17)
  430 COLOUR5:PRINTTAB(4,19)"KEY CON
TROL"TAB(1,22)"D";UD$;"U":PROCLINE(2
3)
  440 COLOUR6:PRINTTAB(4,25)"STOP CO
NTROL"TAB(3,28)"HOLD DOWN  'S'"
  450 ENDPROC
  460 DEFPROCLINE(L)
  470 COLOUR7:FORI=0TO19:PRINTTAB(I,
L)" ":NEXT
  480 ENDPROC
```

VDU23 definition.

```
   10  REM
   20  REM Character Generator - V-I
I
   30  REM
   40  REM for the BBC Micro Model B
   50  REM
   60  REM by J.R.Wilson  April 1983
   70  REM
   80  DIM M% 2560,T% 320,Z% 7
   90  X%=0:Y%=0
  100  REM Make Cursor keys give cod
es
  110  *FX4,1
  120  REM Trap any errors
  130  ON ERROR GOTO 670
  140  D=0
  150  W=0
  160  XM=0:YM=0
  170  REM
  180  REM Display menu
  190  REM
  200  MODE4
  210  VDU4
  220  HIMEM=&3000
  230  VDU 23,224,255,255,255,255,25
5,255,255,255
  240  VDU23,225,0,0,0,24,24,0,0,0
  250  COLOUR129:COLOUR0
  260  PRINT STRING$(240," ");TAB(0,
0);
  270  PRINT '" C H A R A C T E R
G E N E R A T O R "
  280  PRINTTAB(15,4);">MENU<"''
  290  COLOUR1:COLOUR128
  300  PRINT '"   1   Enter characte
r"
  310  PRINT '"   2   Edit character
"
  320  PRINT '"   3   Spool characte
r to cassette"
  330  PRINT '"   4   View character
"
  340  PRINT '"   5   Invert charact
er"
  350  PRINT '"   6   List codes"
  360  PRINT '"   7   Operating syst
em call"
  370  PRINT '"   8   End program"
  380  PRINT''''"Press the number the
n RETURN ";
  390  A=FNCH(8)
  400  CLS
  410  IF A=1 THEN MODE0:PROCENTER
  420  IF A=2 THEN MODE0:HIMEM=&3000
:PROCEDIT
  430  IF A=3 THEN PROCCHANGE:PROCSP
OOL
  440  IF A=4 THEN PROCCHANGE:PROCMO
DE:MODE M:HIMEM=&3000:PROCVIEW
  450  IF A=5 THEN PROCINVERT
  460  IF A=8 THEN PROCEND
  470  IF A=6 THEN PROCCHANGE:PROCLI
ST
  480  IF A=7 THEN PROCoscall
  490  REM Clear keyboard buffer
  500  *FX15,1
  510  GOTO 200
  520  REM
  530  REM Enter a number routine
  540  REM
  550  DEF FNCH(C)
  560  LOCAL E,A
  570  E=-1
  580  A=GET:IF A=13 AND E<>-1 THEN
=E
  590  IF C=10 AND A=65 THEN VDU A,8
:E=10:GOTO580
  600  IF A<49 OR A>48+C THEN 580
  610  PRINT CHR$A;CHR$8;
  620  E=A-48
  630  GOTO 580
  640  REM
  650  REM Trap any errors
  660  REM
  670  IF ERR=17 THEN 200
  680  REPORT
  690  IF ERR>200 THEN PROCSPACE(31)
:GOTO200
  700  PRINT " in line ";ERL
  710  GOTO 770
  720  REM
  730  REM End the program
  740  REM
  750  DEF PROCEND
  760  VDU22,7:REM Change to mode 7
  770  PRINTTAB(0,5)
  780  REM Give the cursor keys thei
r usual function
  790  *FX4,0
  800  END
  810  REM
  820  REM Enter a character into me
mory
  830  REM
  840  DEF PROCENTER
  850  PRINT''''"Number of characters
 wide (1 to 9 or A ;  where A=10 wid
e )  ";
  860  W=FNCH(10)
  870  PRINT''''"Number of characters
 deep (1 to 4) ";
  880  D=FNCH(4)
  890  CLS
  900  XM=W*8-1
  910  YM=D*8-1
  920  FORI%=0TOYM*8U+8U
  930  M%?I%=0
  940  NEXT
  950  X%=0:Y%=0
  960  PROCEDIT
  970  ENDPROC
  980  REM
  990  REM Change the picture into b
inary
 1000  REM
 1010  DEF PROCCHANGE
 1020  PRINT '"Please wait a few sec
onds."
 1030  FOR I%=0 TO D-1
 1040  FOR J%=0 TO W-1
 1050  FOR K%=0 TO 7
 1060  ?(T%+K%+J%*8+I%*80)=0
 1070  FOR L%=0 TO 7
 1080  IF ?(M%+J%*8+L%+((I%*8+K%)*80
))=1 THEN ?(T%+K%+J%*8+I%*80)=?(T%+K
%+J%*8+I%*80)+2^(7-L%)
 1090  NEXT L%,K%,J%,I%
 1100  ENDPROC
 1110  REM
 1120  REM Edit the picture
 1130  REM
 1140  DEF PROCEDIT
 1150  IF YM=0 OR XM=0 THEN ENDPROC
 1160  IF YM=31 AND XM=79 THEN VDU5:
REM Stop the screen from scrolling u
p
 1170  FOR I%=0 TO YM
 1180  FOR J%=0 TO XM
 1190  PRINT TAB(J%,I%);
 1200  IF ?(M%+J%+I%*80)=0 THEN VDU
225 ELSE VDU 224
 1210  NEXT J%,I%
 1220  VDU 23;8202;0;0;0;:REM Make c
ursor invisible
 1230  IF X%=79 AND Y%=31 THEN VDU5,
9,127 ELSE VDU4
 1240  PRINT TAB(X%,Y%);"X";
 1250  A$=GET$
 1260  PRINTTAB(X%,Y%);
 1270  IF X%<>79 OR Y%<>31 THEN 1310
 1280  VDU9,127,30
 1290  IF ?M%=1 THEN VDU 224 ELSE VD
U 225
 1300  PRINTTAB(X%,Y%);
 1310  IF ?(M%+X%+Y%*80)=1 THEN VDU
224 ELSE VDU 225
 1320  REM Clear the keyboard buffer
 1330  *FX15,1
 1340  REM Test the cursor keys
 1350  IF INKEY(-26) THEN X%=X%-1
 1360  IF INKEY(-122) THEN X%=X%+1
 1370  IF INKEY(-42) THEN Y%=Y%+1
 1380  IF INKEY(-58) THEN Y%=Y%-1
 1390  REM Keep the cursor on the pi
cture
 1400  IF Y%=-1 THEN Y%=YM
 1410  IF Y%>YM THEN Y%=0
 1420  IF X%=-1 THEN X%=XM
 1430  IF X%>XM THEN X%=0
 1440  REM Delete a block
 1450  IF INKEY(-90) THEN ?(M%+X%+Y%
*80)=0
 1460  REM Leave a block
 1470  IF INKEY(-100) THEN ?(M%+X%+Y
%*80)=1
 1480  GOTO 1230
 1490  REM
 1500  REM What mode do you want to
 display the character in ?
 1510  REM
 1520  DEFPROCMODE
 1530  PRINT TAB(0,10);"What mode fo
r display ? ";
 1540  INPUT""M
 1550  IF M<0 OR M>6 OR M<>INTM THEN
 CLS:GOTO1530
 1560  ENDPROC
 1570  REM
 1580  REM Display the character
 1590  REM
 1600  DEF PROCVIEW
 1610  FOR I%=0 TO D-1
 1620  FOR J%=0 TO W-1
```

```
 1630  FOR L%=0 TO 7
 1640  Z%?L%=?(T%+L%+J%*8+I%*80)
 1650  NEXT L%
 1660  VDU23,224,?Z%,Z%?1,Z%?2,Z%?3,
Z%?4,Z%?5,Z%?6,Z%?7
 1670  PRINT TAB(J%+5,I%+5);CHR$224;
 1680  NEXT J%,I%
 1690  IF M=3 OR M=6 THEN PROCSPACE(
24):ENDPROC
 1700  IF M=2 OR M=5 THEN PROCSPACE(
50):ENDPROC
 1710  PROCSPACE(31)
 1720  ENDPROC
 1730  REM
 1740  REM Press the SPACE BAR to co
ntinue
 1750  REM
 1760  DEF PROCSPACE(Y%)
 1770  PRINTTAB(0,Y%);"Press the SPA
CE BAR to continue.";
 1780  REPEAT UNTIL GET$=" "
 1790  ENDPROC
 1800  REM
 1810  REM Spool a character onto ca
ssette
 1820  REM
 1830  DEF PROCSPOOL
 1840  INPUT TAB(5,5)"First characte
r number = " N
 1850  IF N<32 OR N>255 OR N<>INT(N)
 THEN CLS:GOTO 1840
 1860  INPUT TAB(5,10)"First line nu
mber = " L
 1870  IF L<0 OR L>32767 OR L<>INT(L
) THEN 1860
 1880  *SPOOL("CHAR")
 1890  FOR I%=0 TO D-1
 1900  FOR J%=0 TO W-1
 1910  PRINT ;L;" VDU 23,";N;
 1920  FOR K%=0 TO 7
 1930  PRINT ",";?(T%+K%+J%*8+14*80)
;
 1940  NEXT K%
 1950  PRINT
 1960  N=N+1
 1970  L=L+10
 1980  NEXT J%,I%
 1990  *SPOOL
 2000  PROCSPACE(31)
 2010  ENDPROC
 2020  REM
 2030  REM Invert the picture in mem
ory.    i.e. change all white blocks
 to black          and visa-versa
 2040  REM
 2050  DEF PROCINVERT
 2060  PRINT'"Please wait a few seco
nds."
 2070  FORI%=0TOYM*80+80
 2080  M%?I%=(M%?I% +1)AND1
 2090  NEXTI%
 2100  ENDPROC
 2110  REM
 2120  REM List the binary codes mak
ing each character up
 2130  REM
 2140  DEF PROCLIST
 2150  FOR I%=0 TO D-1
 2160  FOR J%=0 TO W-1
 2170  CLS
 2180  PRINT '"Character at ";J%+1;"
, ";I%+1
 2190  PRINT ''"Codes are as follows
:"''
 2200  FOR K%=0 TO 7
 2210  PRINT TAB(20);?(T%+K%+J%*8+I%
*80)
 2220  NEXTK%
 2230  PROCSPACE(31)
 2240  NEXT J%,I%
 2250  ENDPROC
 2260  REM
 2270  REM Allow you to make an O.S.
 Call from within the program
 2280  REM
 2290  DEF PROCoscall
 2300  PRINT TAB(0,5);"Type the requ
ired operating system call and press
 RETURN."
 2310  PRINT TAB(0,10);"Call = ";
 2320  INPUT ""C$
 2330  $&A00=C$
 2340  X%=0:Y%=&A
 2350  PRINTTAB(0,15);
 2360  CALL&FFF7
 2370  ENDPROC
```

A Fill routine.

```
    5 REM The variables in the testb
ed are: cursor at x,y; v=4 for curso
r moving, 5 for cursor drawing; use
cursor control keys and joystick if
available else REM out line 150 and
remove the OR((ADVAL(0)AND3)<>0) fro
m line 70
   10 DATA RED,GREEN,YELLOW,BLUE,MAG
ENTA,CYAN,WHITE
   20 MODE7:PRINT'''''"The colour co
des used are:"'':FORI=1TO7:READcol$:
PRINTCHR$(128+I);"    ";I;" for ";co
l$;SPC(10-LEN(col$));CHR$157;CHR$(12
8+I):NEXT:PRINT''"and 0 for black"''
"press space to go on...";:PROCgk(")
   30 MODE3:PRINT"Controls are:"''''"
B or F change the background or fore
ground to the number keyed after"'"C
 clears to MODE number keyed after"'
"SPACE or Trigger toggles between MO
VE and DRAW"'"Arrows and joystick wo
rk"'"COPY fills"
   40 PRINT"K sets a border"'"G goes
 to it"'"O sets an orientation"'"N a
 number of sides"'"M draws a polygon
"'"T writes text 'til RETURN"'"A var
ies the GCOL option 0 plot 1 OR 2 AN
D 3 EOR 4 Invert"''"press space to g
o on...";
   50 PROCgk(" "):x=500:y=500:edgex=
x:edgey=y:rad=0:v=4:gtype=0:orient=0
:sides=36:fore%=7:back%=0:MODE 2:MOV
Ex,y:VDU5:PROCcoff:REPEAT:*FX15,0
   60 IFINKEY(-68)THENfore%=VAL(GET$
):GCOLgtype,fore%ELSEIFINKEY(-101)TH
ENback%=VAL(GET$):GCOLgtype,back%+12
8 ELSEIFINKEY(-83)THENPROCgk("012"):
MODE VAL(a$):MOVEx,y:VDU5:PROCcoff:G
COLgtype,fore%:GCOLgtype,128+back%
   70 tog=INKEY(-99)OR((ADVAL(0)AND3
)<>0):IFtog ANDv=4THENv=5:PROCdelay(
10)ELSEIFtog ANDv=5THENv=4:PROCdelay
(10)ELSEIFINKEY(-36)THENPROCdelay(25
):PROCtext ELSEIFINKEY(-66)THENPROCg
k("01234"):gtype=VAL(a$):GCOLgtype,f
ore%:GCOLgtype,128+back%
   80 IFINKEY(-52)THENedgex=x:edgey=
y:rad=0 ELSEIFINKEY(-84)THENx=edgex:
y=edgey:MOVEx,y ELSEIFINKEY(-55)THEN
PROCorient ELSEIFINKEY(-86)THENPROCs
ides ELSEIFINKEY(-102)THENPROCpolygon
   90 IFINKEY(-58)THENPROCP(0,4)
  100 IFINKEY(-42)THENPROCP(0,-4)
  110 IFINKEY(-26)THENPROCP(-4,0)
  120 IFINKEY(-122)THENPROCP(4,0)
  130 PROCP(FNad(ADVAL(2)),FNad(ADVA
L(1))):REM this line out if you don'
t want joystick control
  140 PROCc:PROCc:IFINKEY(-106)THENP
ROCFILL(x,y,back%):MOVEx,y:v=4
  150 UNTIL FALSE
  160 DEFFNad(A%):IFA%<25000THEN=INT
((A%-25000)/1000) ELSEIFA%>40000THEN
=INT((A%-40000)/1000) ELSE=0
  170 DEFPROCc:PLOT2,12,12:PLOT2,-24
,0:PLOT2,0,-24:PLOT2,24,0:PLOT2,0,24
:PLOT2,-12,-12:ENDPROC
  180 DEFPROCpolygon:IFrad=0THENrad=
FNhype
  190 startx=x+COS(orient)*rad:start
y=y+SIN(orient)*rad:MOVEstartx,start
y:FORangle=orient TOorient+2*PI STEP
 2*PI/sides:newx=x+COS(angle)*rad:ne
wy=y+SIN(angle)*rad:DRAWnewx,newy:NE
XT:IFnewx<>startx ORnewy<>starty THE
NDRAWstartx,starty
  200 MOVEx,y:ENDPROC
  210 DEFPROCP(XI,YI):IFx+XI<1280AND
x+XI>0THENx=x+XI
  220 IFy+YI<1024ANDy+YI>0THENy=y+YI
  230 PLOTv,x,y:ENDPROC
  240 DEFPROCcoff:PROCosbyte(&97,0,1
0):PROCosbyte(&97,1,32):ENDPROC
  250 DEFPROCcon:PROCosbyte(&97,0,10
):PROCosbyte(&97,1,90):ENDPROC
  260 DEFPROCosbyte(A%,X%,Y%):ind=US
R(&FFF4):ENDPROC
  270 DEFPROCgk(legal$):REPEATa$=GET
$:IFa$>="A"ANDa$<="Z"THENa$=CHR$(ASC
(a$)+32)
  280 PROCck:UNTIL legal:ENDPROC
  290 DEFPROCck:legal=FALSE:ind=0:RE
PEAT ind=ind+1:IF MID$(legal$,ind,1)
=a$ THEN legal=TRUE
  300 UNTIL legal OR ind=LEN(legal$)
:ENDPROC
```

A Fill routine

Douglas Stewart of Edinburgh has submitted another recursive procedure demonstrating that not all recursion is superfluous extravagance coded for effect rather than utility. This routine will fill an area of background colour bounded by non-background colour with foreground colour.

Within this bald description lies a process which is a joy to watch on the screen, as colour first flows up, then down, filling nooks and crannies of irregular shapes, and back-tracking to finish off part-completed sections. The Fill function is essential to any graphics art pack, and the test bed in which the procedure is set will allow pictures to be drawn. It provides a good grounding from which you can develop an art pack tailored to your own specification. The routine can be included within any program requiring a Fill facility; the testbed is optional.

```
  310 DEFPROCdelay(A%):T%=TIME:REPEA
T UNTIL TIME>T%+A%:ENDPROC
  320 DEFPROCorient:orient=ASN((y-ed
gey)/(FNhype+0.001)):IFx-edgex<0THEN
orient=orient+PI
  330 ENDPROC
  340 DEFPROCsides:PROCgk("3456789ab
cdefghijklmopqrstuvwxyz"):sides=ASC(
a$):IFsides>96THENsides=sides-86ELSE
 sides=sides-48
  350 ENDPROC
  360 DEFFNhype:=SQR((x-edgex)^2+(y-
edgey)^2)
  370 DEFPROCtext:REPEAT:a$=GET$:PRI
NTa$;:UNTILa$=CHR$13:ENDPROC
30000 REM Procedure to fill an area
 of current backgroud colour which is
30010 REM enclosed by non-background
 colour.
30020 REM Syntax is PROCFILL(Xcoordi
nate,Ycoordinate,current_background_
colour)
30030 REM Procedure will work in any
 mode.
30040 REM By Douglas Stewart, March
 1983.
30050 REM ************ NOTE:   OPERA
TING SYSTEM SERIES 1 OR LATER ONLY *
*****
30060 REM ------------------------
-------------------------------
30070 REM As the function is recursi
ve for more complex shapes,short var
iable
30080 REM names have been used to li
mit the stack space used.
30090 DEFPROCFILL(X,Y,V)
30100 DIM PARAM 7:REM Space for para
meter block for OSWORD 13.
30110 V=V AND15
30120 LOCALM
30130 A%=135:M=((USR(&FFF4)DIV&10000
)AND15)-1:REM Current graphics mode.
30140 IFM=7ORM=3ORM=6ENDPROC:REM Che
ck for non-graphics mode.
30150 W=2^(M MOD3+1):REM Width of pi
xel for this mode.
30160 Z=2*W
30170 PROCUD(X,Y,4):PROCUD(X,Y,-4):R
EM FILL UP AND DOWN
30180 ENDPROC
30190 DEFPROCUD(X,Y,S)
30200 LOCALF%,B%,C%,D%,E%:REM These
 variables must be LOCAL
30210 PLOT76,X,Y:REM Get width but d
o not draw yet.
30220 B%=FNC(4):REM Get last X coord
inate.
30230 C%=FNC(0):REM Get previous X c
oordinate.
30240 :
30250 REM ******* Main loop starts h
ere. *******
30260 PLOT77,X,Y:REM Fill in a horiz
ontal line.
```

(continued on page 147)

ATARI

MICRO COMPUTER PROGRAMMING OPPORTUNITY

WANTED

Experienced freelance assembler programmers willing to work with an Atari authorised organisation to convert the following best selling arcade games for our new Software Publishing Venture.

Pac-Man	Donkey Kong	Xavions
Defender	Pole Position	Galaxion
Vanguard	Chrystal Castles	Joust
Centipede	Missile Command	Mrs Pac-Man
Robotron	Battle Zone	

Spectrum, Dragon, BBC and Commodore preferred.

INTERESTED?

Send samples of your work and details of your development equipment to:

Mrs K Tarvin (Dept. PC)
ATARI INTERNATIONAL (UK) INC
Atari House, Railway Terrace, Slough, Berks SL2 5BZ.

● Circle No. 182

TWICKENHAM COMPUTER CENTRE LTD

ACORN commodore apple

Buy the **BEST BRITISH COMPUTER**

As supplied to schools, local authorities and government departments by the leading BBC/Acorn dealer & service centre

BBC Model A £299 BBC Model B £399
Wordwise Word Processor (needs 1.0 System)
Software – Acorn, Bugbyte, Computer Concepts (logo 2)
Acornsoft on Disk
Joysticks for the BBC – 100K Single Disk Drives
BBC 800K Twin Disk Drives
Torch 800K Twin Disk Drives with CPN

ALL PRICES INCLUDE VAT!

We stock all the extras:
Floppy disk interface
Econet network interface
Voice synthesis circuits
Cartridge ROM pack interface
Alternative high-level languages
Cassette recorders
Dot matrix printers
Daisywheel printers
Teletext & Prestel units
Monitors + Disk drives
(subject to availability)

✱Commodore 64: £299 ✱Coming soon: Acorn Electron – phone your order now!

Apple IIE 64K on special offer – phone for latest price

ACORNSOFT Software for the BBC

Business Games	*Rocket Raid*	
Tree of Knowledge	*Meteors*	
Peeko-Computer Pack	*Arcadians*	
Algebraic Manipulation Pack	*Sliding Block Puzzles*	
Creative Graphics Cassette	*Cube Master*	
Graphs & Charts Cassette	*Chess*	£9.95 EACH
Desk Diary		
Philosopher's Quest	**Books for the BBC:**	
Sphinx Adventure	*Creative Graphics*	
Monsters	*Graphs & Charts*	
Snapper	*LISP on the BBC*	
Planetoid	*FORTH on the BBC*	£7.50 EACH

Daisywheel Printer for BBC (complete with interface) £425
Star 510 Dot Matrix Printer £325
Star 515 Dot Matrix Printer £425
Brother Daisywheel Printer £550
Black & White TV with Monitor conversion (this month only!)
12" or 14": £50 (BBC compatible): £30
Cassette Deck (BBC compatible): £100
Tantel Prestel Adapters: £100

Post & Packing £2.50

Plus software, peripherals, games, books and much more always available from:
Twickenham Computer Centre
72 Heath Rd Twickenham Middx TW1 4BW (Tel: 01-891 4991)

Delivery extra – nationwide by Securicor

● Circle No. 183

Shurland Computers

"THIS MONTHS FEATURE"

GIFT WRAPPED AND DELIVERED TO YOUR DOOR
(ALL OUR PRICES INCLUDE VAT & CARRIAGE)

apple® IIe

● That Personal Touch!

APPLE IIE DISK DRIVE WITH CONTROLLER 80 COL CARD £1000
APPLE IIE £740 MONITOR £112 COLOUR MONITOR(MR) £310
DISK DRIVE without cont. £223 80 COL. + 64K £165 APPLE WRITER £110
QUICK FILE £58 MULTI PLAN £169 MICRO SOFT CP/M £235

● Business Minded?

APPLE III, 256K MONITOR III SOS SYSTEM SOFTWEAR WITH
APPLE II EMULATION BUILT IN DISK DRIVE £2145
APPLE III, 256K WITH ADDITIONAL PROFILE;
5M. BYTE HARD DISK £3130
APPLE WRITER III £149.50 VISCALC £153 QUICK FILE £50

"WITH FULL SUPPORTING PROGRAMME"

● ALONG WITH APPLE PERIPHERALS WE SUPPLY A COMPREHENSIVE RANGE OF PRINTERS (DOT MATRIX AND LETTER QUALITY) AT EXTREMELY COMPETITIVE PRICES INCLUDING:
EPSON FX80 £415,15 RX80 £281.40 & MX100 £466.94

- *A COMPREHENSIVE RANGE OF SOFTWEAR, SUPPLIES, LISTING PAPER AND DISKETTES*
- *CONTINUED HARD WEAR AND SOFTWEAR SUPPORT*
- *12 MONTHS FULL GUARANTEE ON PARTS AND LABOUR*
- *ON SITE MAINTENANCE CONTRACTS*

TELEPHONE LUTON (0582) 450710/450557
OR VISIT OUR EXTENSIVE SHOWROOMS AT MARSHALL CHAMBERS

SHURLAND COMPUTERS MARSHALL CHAMBERS
MILL ST. LUTON BEDS.

BARCLAYCARD ACCESS AMERICAN EXPRESS ACCEPTED

Shurland Computers

● Circle No. 184

IBM PC - full range of products available, including colour monitor, Z80 card, Winchester up grade kits, and our U D M range of add-on boards.



ACT Sirius - plus **Epson** printer or equivalent, from **£2395.** 1·2/2·4/10Mb machines, software, hardware add-ons, call for full list.

OSBORNE 1 - £1375 with free 12″ monitor, MailMerge,™ WordStar,™ C and M Basic, dBase II,™ Super Calc,™ and CP/M.

SUPERBRAIN II from **£1495,** full range from 320K to 36 Mb, 6Mb hard disk models £2795.

EPSON QX 10 - at **£1730,** plus Pearl & Peachtree software and our new range of Epson printers.

Microware

For Sales, Service, Maintenance, Advice.
Phone **01-272 6237/6398** or Telex 297598.

Showroom at:

637 Holloway Road, London N19 5SS.

Subscribe Now!

Make sure of your copy every month. Practical Computing is mailed direct to subscribers in a strong polythene wrapper, ensuring that it arrives unfolded and in good condition.

Practical Computing
SUBSCRIPTION ORDER FORM

Please send me Practical Computing each month for 12 months:

☐ I enclose cheque/PO to the value of £13.00 (UK) £19 (Overseas). Cheques should be made payable to Business Press International Ltd.

OR

☐ Please debit my credit card account:
Enter number

Tick relevant box:

Access	Barclaycard/Visa	Diners Club	American Express
☐	☐	☐	☐

Signed.....Date .....

Name .....

Address .....

.....

.....

Job Title (if any).....

Type of Business (if any) .....

.....

.....

Do you own a computer?

Yes ☐ No ☐

Do you have access to a computer?

Yes ☐ No ☐

If so please state type .....

.....

.....

Registered in England 151537
Registered Office: Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Number of Employees (if any) Please tick box

1	2	3	4	5	6	7	8	9
1-24	25-49	50-99	100-249	250-499	500-999	1000-1999	2000-4999	5000+

Free information!

Make Practical Computing work for you! Use the reader enquiry service to obtain information about hardware and software products before you buy them.

OCTOBER 1983 PCO 8370
(This card is valid for 6 months only)

Practical Computing
READER ENQUIRY SERVICE

To obtain free information about items advertised in this issue circle the appropriate enquiry numbers listed below:

101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124
125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148
149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172
173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196
197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220
221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244
245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268
269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292
293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316
317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340
341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364
365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388
389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412
413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436

Job Title (if any).....

Type of Business (if any) .....

Do you own a computer? Yes ☐ No ☐

If so please state type .....

Please remove ☐ include ☐ my name for business direct mail.

Name.....

Address.....

.....

.....

.....

No of Employees (if any) Please tick box

1	2	3	4	5	6	7	8	9
1-24	25-49	50-99	100-249	250-499	500-999	1000-1999	2000-4999	5000+

Place a regular order!

Even if you don't want to subscribe you can still ensure a regular supply of copies. Fill in the order form and pass it to your newsagent to reserve your own personal copy of Practical Computing.

HAND THIS CARD TO YOUR NEWSAGENT

Practical Computing
NEWSAGENT ORDER FORM

Why not place a regular monthly order for Practical Computing with your local newsagent? Just fill in the coupon and hand it to your newsagent.

Please order a copy of Practical Computing for me every month until further notice.

Commencing .....

I will call and collect it ..... ☐

Please deliver to my home address ..... ☐
(Tick appropriate box)

Name.....

Address.....

.....

.....

.....

Date .....

PRACTICAL COMPUTING
SUBSCRIPTION MANAGER
BUSINESS PRESS INTERNATIONAL LTD
OAKFIELD HOUSE
PERRYMOUNT ROAD
HAYWARDS HEATH
SUSSEX RH16 3DH

Postage will be paid by licensee

Do not affix Postage Stamps if posted in Gt Britain, Channel Islands, N Ireland or the Isle of Man

BUSINESS REPLY SERVICE
Licence No CY711

PRACTICAL COMPUTING
READER SERVICE DEPARTMENT
OAKFIELD HOUSE
PERRYMOUNT ROAD
HAYWARDS HEATH
SUSSEX RH16 3DH

2

HAND THIS CARD TO YOUR NEWSAGENT

Face

Alistair Lindsay of Edinburgh has submitted what he calls his first successful attempt at making a reasonable program. The result is a Mode 7 graphic display — not the easiest problem to start on! — which does just what it sets out to do; it is quite funny.

I can see a whole set of computer jokes resulting from it — variations on the "Mummy, Mummy" or "Knock, Knock" themes of yesteryear — but this is the first. Nobody has submitted a computerised joke before. Given enough of them chained together, it might be the music-hall turn reborn.

Box spin

R A Lober of Peterson-super-Ely, Cardiff, has submitted a demonstration of graphics rotation. I had not previously thought it possible in Basic but Mr Lober proves me wrong — though I suspect that is only because the box he is spinning is rather small and only four of its faces are ever visible. The following variables are used:

A% — width of sides
B% — width of ends
T% — angle of turn
D — current width of sides
P — current width of ends
S — perspective
W — reduction in D
F — reduction in P

(listing continued from page 143)

```
30270 Y=Y+S
30280 D%=FNC(4)
30290 E%=FNC(0)
30300 IFE%-C%<Z THEN30350:REM Extrem
ities almost coincident?
30310 F%=C%
30320 F%=F%+W
30330 IFPOINT(F%,Y-S)=V PROCUD(F%,Y-
S,S):REM Recurse to FILL branch
30340 IFF%<E%THEN30320
30350 IFB%-D%<Z THEN30400
30360 F%=D%
30370 F%=F%+W
30380 IFPOINT(F%,Y-S)=V PROCUD(F%,Y-
S,S):REM Recurse to FILL branch.
30390 IFF%<B%THEN30370
30400 IFC%-E%<Z THEN30450
30410 F%=E%
30420 F%=F%+W
30430 IFPOINT(F%,Y-2*S)=V PROCUD(F%,
Y-2*S,-S):REM Recurse to FILL branch
30440 IFF%<C%THEN30420
30450 IFD%-B%<Z THEN30500
30460 F%=B%
30470 F%=F%+W
30480 IFPOINT(F%,Y-2*S)=V PROCUD(F%,
Y-2*S,-S):REM Recurse to FILL branch
30490 IFF%<D%THEN30470
30500 B%=D%
30510 C%=E%
30520 IFPOINT(X,Y)<>V THEN30530ELSE3
0260
30530 IFPOINT(X,Y)=-1ENDPROC:IE If i
t is off the edge of screen.
30540 F%=E%
30550 REPEAT
30560 F%=F%+W
30570 UNTILF%>D%ORPOINT(F%,Y)=V
30580 IFF%>D%ENDPROC
30590 X=F%
30600 GOTO30260
30610 :
30620 REM THIS FUNCTION USES OSWORD
13 TO GET THE LAST POINTS VISITED
30630 REM VARIABLE O IS THE OFFSET O
F THE AREA TO BE READ IN THE PARAM.
BLOCK.
30640 DEFFNC(O):A%=13:X%=PARAM MOD25
6:Y%=PARAM DIV256:CALL&FFF1:=(PARAM!
O)AND&FFFF
```

Face.

```
   10  MODE7
   20  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"WELCOME TO THE B B C MIC
RO COMPUTER"
   30  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"WELCOME TO THE B B C MIC
RO COMPUTER"
   40  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"I AM GOING TO DEMONSTRAI
T WHAT I"
   50  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"I AM GOING TO DEMONSTRAI
T WHAT I"
   60  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"              CAN DO"
   70  PRINT CHR$(141);CHR$(129);CHR$(1
57);CHR$(135);"              CAN DO"
   80  PRINT:PRINT:PRINT:PRINT:PRINT CH
R$(133);" PRESS'Y' TO GO ON OR'N' TO GO
 BACK"
   90  A$=GET$
  100  IF A$="N" THEN GOTO10
  104  IF A$="Y" THEN GOTO110
  105  GOTO90
  110  CLS
  120  MODE2
  130  VDU23,88,255,255,255,255,255,255
,255,255:VDU23,81,254,254,254,126,62,30
,14,6,23,90,255,255,255,255,0,0,0,0
  140  COLOUR3:PRINT"        XXXXXX"
  150  COLOUR3:PRINT"      XXXXXXXX"
  160  COLOUR3:PRINT"    XXXXXXXXXX"
  170  COLOUR3:PRINT"   XX";:COLOUR5:P
RINT"XXXXXXXX";:COLOUR3:PRINT"XX"
  180  COLOUR3:PRINT"     X";:COLOUR5:PR
INT"XXXXXXXXXX";:COLOUR3:PRINT"X"
  190  COLOUR5:PRINT"   XXXXXXXXXXXXXX"
  200  COLOUR5:PRINT"  XXX";:COLOUR7:PR
INT"XXX";:COLOUR5:PRINT"X";:COLOUR1:PRI
NT"XX";:COLOUR5:PRINT"X";:COLOUR7:PRINT
"XXX";:COLOUR5:PRINT"XXX"
  210  COLOUR5:PRINT"  XXX";:COLOUR7:PR
INT"XX";:COLOUR4:PRINT"X";:COLOUR5:PRIN
X";:COLOUR4:PRINT"X";:COLOUR7:PRINT"XX"
;:COLOUR5:PRINT"XXX"
  220  COLOUR5:PRINT"  XXXXXX";:COLOUR
1:PRINT"XX";:COLOUR5:PRINT"XXXXXX"
  230  COLOUR5:PRINT"  XXXXXX";:COLOUR
1:PRINT"XX";:COLOUR5:PRINT"XXXXXX"
  240  COLOUR5:PRINT"   XXXXX";:COLOUR1
:PRINT"XXXX";:COLOUR5:PRINT"XXXXX"
  250  COLOUR5:PRINT"   XXXXX";:COLOUR1
:PRINT"XXXX";:COLOUR5:PRINT"XXXXX"
  260  COLOUR5:PRINT"    XXXXXXXXXXX"
  270  COLOUR5:PRINT"     XXXXXXXXX"
  280  COLOUR5:PRINT"     XX";:COLOUR1:
PRINT"XXXXX";:COLOUR5:PRINT"XX"
  290  COLOUR5:PRINT"      X";:COLOUR1:
PRINT"X";:COLOUR0:PRINT"X";:COLOUR7:PRI
NT"QZ";:COLOUR0:PRINT"X";:COLOUR1:PRINT
"X";:COLOUR5:PRINT"X"
  300  COLOUR5:PRINT"      X";:COLOUR1:
PRINT"XXXXX";:COLOUR5:PRINT"X"
  310  COLOUR5:PRINT"      XXXXXXX"
  320  COLOUR5:PRINT"       XXXXX"
  330  PRINT:PRINT"  I'VE GONE BANANAS"
  340  FOR I=1 TO 3
  350  COLOUR7 :PRINTTAB(5,6);"XX";:COL
OUR4:PRINT"X";:COLOUR7:PRINTTAB(5,7);"X
XX":COLOUR4:PRINTTAB(12,6);"X";:COLOUR7
:PRINT"XX":COLOUR7:PRINTTAB(12,7);"XXX"
  360  FOR J=1 TO 300:NEXTJ
  370  COLOUR7 :PRINTTAB(5,6);"X";:COLO
UR4:PRINT"X";:COLOUR7:PRINT"X";:COLOUR7
:PRINTTAB(5,7);"XXX":COLOUR7:PRINTTAB(1
2,6);"X";:COLOUR4:PRINT"X";:COLOUR7:PRI
NT"X":COLOUR7:PRINTTAB(12,7);"XXX"
  380  FOR J=1 TO 300:NEXTJ
  390  COLOUR4:PRINTTAB(5,6);"X";:COLOU
R7:PRINT"XX":COLOUR7:PRINTTAB(5,7);"XXX
":COLOUR7:PRINTTAB(12,6);"XX";:COLOUR4:
PRINT"X":COLOUR7:PRINTTAB(12,7);"XXX"
  400  FOR J=1 TO 300:NEXTJ
  410  COLOUR7:PRINTTAB(5,6);"XXX":COLO
UR4:PRINTTAB(5,7);"X";:COLOUR7:PRINT"XX
":COLOUR7:PRINTTAB(12,6);"XXX":COLOUR7:
PRINTTAB(12,7);"XX";:COLOUR4:PRINT"X"
  420  FOR J=1 TO 300:NEXTJ
  430  COLOUR7:PRINTTAB(5,6);"XXX":COLO
UR7:PRINTTAB(5,7);"X";:COLOUR4:PRINT"X"
;:COLOUR7:PRINT"X":COLOUR7:PRINTTAB(12,
6);"XXX":COLOUR7:PRINTTAB(12,7);"X";:CO
LOUR4:PRINT"X";:COLOUR7:PRINT"X"
  440  FOR J=1 TO 300:NEXTJ
  450  COLOUR7:PRINTTAB(5,6);"XXX":COLO
UR7:PRINTTAB(5,7);"XX";:COLOUR4:PRINT"X
":COLOUR7:PRINTTAB(12,6);"XXX":COLOUR4:
PRINTTAB(12,7);"X";:COLOUR7:PRINT"XX"
  460  VDU31,0,0
  461  NEXTI
  470  FOR Z=0 TO 255
  480  SOUND1,-15,Z,1
  490  NEXTZ
  491  FORY=155 TO 0 STEP-1
  492  SOUND1,-15,Y,1
  493  NEXTY
  510  C$=INKEY$(10)
  520  MODE7
  530  PRINTCHR$(141);CHR$(136);CHR$(13
4);"  HOW DID YOU LIKE THAT? IF YOU "
  540  PRINTCHR$(141);CHR$(136);CHR$(13
4);"  HOW DID YOU LIKE THAT? IF YOU "
  550  PRINTCHR$(141);CHR$(136);CHR$(13
4);"DID PRESS'Y' IF NOT PRESS'N'"
  560  PRINTCHR$(141);CHR$(136);CHR$(13
4);"DID PRESS'Y' IF NOT PRESS'N'"
  590  D$=GET$
  600  IF D$="Y" THEN GOTO630
  610  IF D$="N" THEN GOTO 620
  615  GOTO 600
  620  PRINTCHR$(135);CHR$(157);CHR$(12
9);"    YOU'VE HURT MY FEELINGS"
  625  G$=INKEY$(1000)
  626  GOTO10
  630  CLS:PRINTCHR$(141);CHR$(136);CHR
$(133);CHR$(157);CHR$(131);"THANK YOU F
OR PRAISEING MY ART FAN"
  640  PRINTCHR$(141);CHR$(136);CHR$(13
3);CHR$(157);CHR$(131);"THANK YOU FOR P
RAISEING MY ART FAN"
  650  PRINTCHR$(141);CHR$(136);CHR$(1
33);CHR$(157);CHR$(131);"          THATS
 ALL FOLKS"
  660  PRINTCHR$(141);CHR$(136);CHR$(1
33);CHR$(157);CHR$(131);"          THATS
 ALL FOLKS"
```

Box spin.

```
  1 A%=0
 10 REM BOX SPIN
 20 REN (c) Copyright R.A.Lober
 30 REM 2.3.83
 31 A%=A%+1:IFA%<3 GOTO10
 40 MODE0
 50 A%=100
 60 B%=50
 70 O=50
 80 VDU29,640;512;
 90 TIME=0
100 FORT%=0TO360STEP10
110 D=A%*COS(RAD(T%))
120 P=B%*SIN(RAD(T%))
130 S=2*P/3
140 W=ABS(S/4)
150 F=D/25
160 GCOL0,1:MOVE128,70:DRAW128,180
170 GCOL4,1
180 FORC%=0TO1
190 IFP<0GOTO210
200 PROCENDA
210 IFD-W<W-D GOTO230
220 PROCSIDEA
221 FORDE=1TO50:NEXT
230 IFP>0GOTO250
240 PROCENDB
250 IFD+W>-(D+W)GOTO270
260 PROCSIDEB
270 :
280 NEXT:NEXT
290 RUN
300 DEFPROCSIDEA
310 MOVE128+D-P-W,150+S+F
320 DRAW128-D-P+W,150-S+F
330 DRAW128-D-P+W,100+S-F
340 DRAW128+D-P-W,100-S-F
350 DRAW128+D-P-W,150+S+F
360 IFC%=0FORN=0TO0:NEXT
370 ENDPROC
380 DEFPROCENDA
390 MOVE128+D-P-W,100-S-F
400 DRAW128+D+P+W,100-S+F
410 DRAW128+D+P+W,150+S-F
420 DRAW128+D-P-W,150+S+F
430 DRAW128+D-P-W,100-S-F
440 IFC%=0FORN=0TO0:NEXT
450 ENDPROC
460 DEFPROCSIDEB
470 MOVE128-D+P-W,100+S+F
480 DRAW128-D+P+W,100-S+F
490 DRAW128-D+P+W,150+S-F
500 DRAW128-D+P-W,150-S-F
510 DRAW128-D+P-W,100+S+F
520 IFC%=0FORN=0TO0:NEXT
530 ENDPROC
540 DEFPROCENDB
550 MOVE128-D+P-W,100+S+F
560 DRAW128-D-P+W,100+S-F
570 DRAW128-D-P+W,150-S+F
580 DRAW128-D+P-W,150-S-F
590 DRAW128-D+P-W,100+S+F
600 IFC%=0FORN=0TO0:NEXT
610 ENDPROC
```

APPLE PIE

by John Harris



Patch

AN EXCELLENT 16-sector disc-patch program or catalogue analyser is submitted by Mark Benson of Tring. Any sector of a regularly formatted Apple floppy — which excludes tiresome commercially screwed discs like VisiCalc — may be read, amended, written or rewritten, with comprehensive prompts at the appropriate point.

While it provides a perfect way of learning about catalogue and program layout if the Write options are avoided, it is a guaranteed way of losing disc data if you do not know what you are about. Given that you do, Mark Benson has written an excellent utility to do it with.

The associated assembler routine — for which I have no source code — is to be saved as:

BSAVE BPATCH,A&0295,L$0113

For use on 13-sector discs the following amendments are needed:

Line 140. *16 becomes *13
Line 670. <16 becomes <13
Line 710. =15 becomes =12
Line 1050. =15 becomes =12

Patch.

```
*0295.03A7

0295- A5 3C 29
0298- F8 85 3C 38 A5 3E E5 3C
02A0- A5 3F E5 3D B0 01 60 A5
02A8- 3C 20 DA FD A2 02 20 4A
02B0- F9 A0 00 B1 3C 20 DA FD
02B8- A2 01 20 4A F9 C8 C0 08
02C0- D0 F1 F0 02 00 00 A2 01
02C8- 20 4A F9 A0 00 B1 3C 09
02D0- B0 C9 A0 B0 04 A9 A0 B0
02D8- 06 C9 E0 90 02 E9 20 20
02E0- ED FD C8 C0 08 D0 E6 A9
02E8- 8D 20 ED FD 18 A5 3C 85
02F0- 40 69 08 85 3C A5 3D 85
02F8- 41 69 00 85 3D 90 9C 60
0300- 18 90 6B A9 04 D0 27 A5
0308- 1F 4C DA FD A9 01 D0 02
0310- A9 02 48 20 E3 03 85 49
0318- 84 48 A0 0C 68 91 48 20
0320- E3 03 20 D9 03 B0 06 A9
0328- 00 A0 0D 91 48 60 48 20
0330- E3 03 84 48 85 49 A0 04
0338- B1 48 85 1E C8 B1 48 85
0340- 1F 68 85 49 A9 24 85 48
0348- A2 02 A0 03 18 B5 1D 29
0350- 0F 08 18 69 B0 C9 BA 90
0358- 02 69 06 91 48 88 28 B0
0360- 09 B5 1D 4A 4A 4A 4A 38
0368- B0 E7 CA D0 DF 60 20 E3
0370- 03 8C C0 03 8D C1 03 A9
0378- B6 85 48 AD E5 03 85 49
0380- A0 00 B1 48 D0 0D A5 CC
0388- 8D C2 03 A5 CD A6 CA A4
0390- C8 90 0B A5 6D 8D C2 03
0398- A5 6E A6 6F A4 70 8D C3
03A0- 03 8E C4 03 8C C5 03 60
```

Patch.

```
10  IF GO THEN 170
20 GO = 1
30 KB =  - 16384:KS =  - 16368:MD
    = 661
40  TEXT : CALL  - 936
50  PRINT  CHR$ (4);"BLOAD BPATCH
    "
60  PRINT "16 SECTOR DISC PATCH :
    "
70  PRINT
80  POKE 34,5
90  GOSUB 1450
100 B =  PEEK (LP + 1) + 2
110 BB = B * 128:BB = BB + BB
120 S =  PEEK (SL) / 16:D =  PEEK
    (DR)
130  PRINT "DISC";: GOSUB 1300
140  POKE SL,S * 16: POKE DR,D: POKE
    VL,0
150  POKE BL,0: POKE BH,B
160  GOSUB 1010:DS = 0: GOTO 550
170  POKE 36,0: POKE 37,22: CALL
     - 990
180  CALL  - 868
190  PRINT
200  PRINT "      OPTION (TYPE ?
    FOR MENU) ?";
210  POKE 50,63: PRINT " ";: POKE
    50,255
220  CALL  - 868
230  POKE 36,32
240 CH =  PEEK (KB): IF CH < 128 THEN
    240
250  POKE KS,0: POKE 36,0: CALL  -
    868
260  IF CH = 212 THEN 380
270  IF CH = 194 THEN 390
280  IF CH = 208 THEN 470
290  IF CH = 210 THEN 550
300  IF CH = 215 THEN 610
310  IF CH = 171 THEN 670
320  IF CH = 173 THEN 700
330  IF CH = 206 THEN 160
340  IF CH = 195 THEN 780
350  IF CH = 191 THEN 800
360  IF CH = 155 THEN 1000
370  CALL  - 198: GOTO 170
380 DS = 0: GOTO 400
390 DS = 128
400  POKE 36,0: POKE 37,5: CALL  -
    990
410  CALL  - 868
420  POKE 37,6: CALL  - 990
430  POKE 60,DS: POKE 62,DS + 127

440  POKE 61,B: POKE 63,B
450  CALL MD
460  GOTO 170
470  POKE 36,0: POKE 37,4: CALL  -
    990
480  CALL  - 868
490  PRINT "ADDR: ";
500 MX = 255: GOSUB 1130: IF TS <
    0 THEN 170
510 AD = TS: PRINT " PATCH: ";
520  GOSUB 1130: IF TS < 0 THEN 4
    00
530  POKE BB + AD,TS:AD = AD + 1:
     IF AD > 255 THEN 400
540  PRINT "  ";: GOTO 520
550  POKE 36,0: POKE 37,4: CALL  -
    990
560  CALL  - 868
570  POKE PF,210: CALL DT
580  CALL RD
590  IF  PEEK (RP) <  > 0 THEN  GOSUB
    1550
600  GOTO 400
610  POKE 36,0: POKE 37,4: CALL  -
    990
620  CALL  - 868
630  POKE PF,215: CALL DT
640  CALL WR
650  IF  PEEK (RP) <  > 0 THEN  GOSUB
    1550
660  GOTO 170
670 S = S + 1: IF S < 16 THEN 730

680 S = 0:T = T + 1: IF T < 35 THEN
    730
690 T = 0: GOTO 730
700 S = S - 1: IF S >  = 0 THEN 7
    30
710 S = 15:T = T - 1: IF T >  = 0
     THEN 730
720 T = 34
730 DS = 0
740  POKE 37,2: CALL  - 990
750  POKE 36,26: POKE HX,T: CALL
    PX
760  POKE 36,36: POKE HX,S: CALL
    PX
770  POKE TK,T: POKE SE,S: GOTO 5
    50
780  GOSUB 1010
790  GOTO 400
800  POKE 36,0: POKE 37,6: CALL  -
    990
810  POKE 35,22: CALL  - 936
820  POKE 35,24
830  PRINT "    OPTIONS AVAILABLE
    :": PRINT
840  POKE 32,5: POKE 33,35: CALL
     - 990
850  PRINT "T  DISPLAY BYTES 00-7
    F."
860  PRINT "B  DISPLAY BYTES 80-F
    F.": PRINT
870  PRINT "R  RE-READ CURRENT SE
    CTOR."
880  PRINT "W  WRITE BACK CURRENT
     SECTOR.": PRINT
890  PRINT "+  ADVANCE A SECTOR."

900  PRINT "-  GO BACK A SECTOR."
    : PRINT
910  PRINT "N  SPECIFY A NEW SECT
    OR."
920  PRINT "C  SPECIFY A NEW SECT
    OR BUT"
930  PRINT "   DO NOT READ IT IN.
    ": PRINT
940  PRINT "P  PATCH THE CURRENT
    SECTOR"
950  PRINT "   IN MEMORY."
960  POKE 32, PEEK (32) - 1: CALL
     - 990
970  PRINT "ESC END."
980  POKE 32,0: POKE 33,40: CALL
     - 990
990  GOTO 170
1000  TEXT : END
1010  POKE 36,19: POKE 37,2: CALL
     - 990
1020  PRINT " TRACK ";:MX = 34: GOSUB
     1130
1030  IF TS < 0 THEN 1010
1040 T = TS: POKE TK,T
1050  PRINT " SECTOR ";:MX = 15: GOSUB

     1130
1060  IF TS < 0 THEN 1010
1070 S = TS: POKE SE,S
1080  POKE 36,0: POKE 37,3: CALL
    .  - 990
1090  CALL  - 868
1100  POKE 37,4: CALL  - 990
1110  CALL  - 868
1120  RETURN
1130  CALL  - 868
1140 CH =  PEEK (36):CV =  PEEK (
    37): POKE 51,128
1150  CALL  - 662
1160  POKE 36,CH: POKE 37,CV: CALL
     - 990
1170 PT = 512:CH =  PEEK (PT):TS =
     - 1: IF CH = 141 THEN 1280
1180 TS = 0
1190  IF CH = 131 THEN  END
1200 CH = CH - 176
1210  IF CH < 0 THEN 1290
1220  IF CH > 22 THEN 1290
1230  IF CH < 10 THEN 1250
1240 CH = CH - 7: IF CH < 10 THEN
    1290
1250 TS = TS * 16 + CH: IF TS > M
    X THEN 1290
1260 PT = PT + 1:CH =  PEEK (PT):
     IF CH <  > 141 THEN 1190
1270  POKE HX,TS: CALL PX
1280  CALL  - 868: RETURN
1290  CALL  - 198: GOTO 1130
1300  POKE  - 16368,0: CALL  - 86
    8
1310  PRINT " SLOT ";:SD = S:MX =
    8: GOSUB 1340:S = SD
1320  PRINT " DRIVE ";:SD = D:MX =
    3: GOSUB 1340:D = SD
1330  CALL  - 868: RETURN
1340 CH =  PEEK (36)
1350  POKE 50,63: PRINT SD;: POKE
    50,255
1360  POKE 36,CH
1370 CH =  PEEK ( - 16384): IF CH
    < 128 THEN 1370
1380  POKE  - 16368,0
1390  IF CH = 141 THEN 1440
1400 CH = CH - 176
1410  IF CH > 0 AND CH < MX THEN
    1430
1420  CALL  - 198: GOTO 1370
1430 SD = CH
1440  PRINT SD;: RETURN
1450 GI = 768:DT = 771:PX = 775:R
    D = 780:WR = 784:IP = 960:LP
     = 962:HP = 964
1460  CALL GI
1470 I = IP: GOSUB 1530:IB = J
1480 I = LP: GOSUB 1530:LO = J
1490 I = HP: GOSUB 1530:HI = J
1500 SL = IB + 1:DR = IB + 2:VL =
    IB + 3:TK = IB + 4:SE = IB +
    5:BL = IB + 8:BH = IB + 9:RP
     = IB + 13
1510 HX = 31:PF = 1059
```

(continued on next page)

ACT SIRIUS I
SEEING IS BELIEVING!

The Act 1 Sirius I is a *revolutionary* concept in personal computing for business, bringing a new meaning to the term Price/Performance.

It offers users the 16 Bit performance normally associated with minicomputers *but* at a microcomputer price.

And it's backed up by the kind of 01 expertise and service that has made 01 one of Britain's top microcomputer Dealers.

Call us *first* on **01-228 2207,** for a personal demonstration of the Act Sirius I. Remember, seeing is believing!

* **ACT Sirius 1** 128K RAM with 1·2Mb S/S Disks including CP/M-86, MS-DOS, (Run-time versions) & Microsoft Basic 86 **£2,195**
* **ACT Sirius 1** 128K RAM with 2·4Mb D/S Disks including CP/M-86, MS-DOS, (Run-time versions) & Microsoft Basic 86 **£2,695**
* **ACT Sirius 1** 256K RAM with 2·4Mb D/S Disks including CP/M-86, MS-DOS, (Run-time versions) & Microsoft Basic 86 **£2,895**
* **ACT Sirius 1** 256K RAM with 10Mb Winchester and 1·2Mb D/S Disk including MS-DOS, (Run-time version incorporating CP/M-86 emulator) & Microsoft Basic 86 **£3,995**

* **Full Peripheral & Software Portfolio in stock**
* N.B. We are open until 6.30 pm weekdays and 10 am – 1 pm Sat.

FROM **£2195** +VAT

Call us for an appointment, sales/mail order, or simply drop in!

01-228 2207

●I COMPUTERS
Britain's No1.

Southampton House, 192-206 York Road, London SW11 3SA
TELEX 8954575 CTCLDN

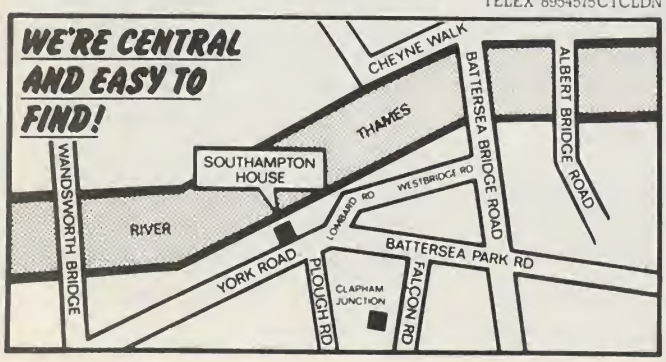

Please send me a copy of your introductory brochure and details of the Act Sirius I. PC2

Name _____

Address _____

_____ Tel No: _____

Occupation _____

Southampton House, 192-206 York Road, London SW11 3SA

● **Circle No. 252**

APPLE PIE

by John Harris

Patch

AN EXCELLENT 16-sector disc-patch program or catalogue analyser is submitted by Mark Benson of Tring. Any sector of a regularly formatted Apple floppy — which excludes tiresome commercially screwed discs like VisiCalc — may be read, amended, written or rewritten, with comprehensive prompts at the appropriate point.

While it provides a perfect way of learning about catalogue and program layout if the Write options are avoided, it is a guaranteed way of losing disc data if you do not know what you are about. Given that you do, Mark Benson has written an excellent utility to do it with.

The associated assembler routine — for which I have no source code — is to be saved as:

BSAVE BPATCH,A&0295,L$0113

For use on 13-sector discs the following amendments are needed:

Line 140. *16 becomes *13
Line 670. <16 becomes <13
Line 710. =15 becomes =12
Line 1050. =15 becomes =12

Patch.

```
*0295.03A7

0295- A5 3C 29
0298- F8 85 3C 38 A5 3E E5 3C
02A0- A5 3F E5 3D B0 01 60 A5
02A8- 3C 20 DA FD A2 02 20 4A
02B0- F9 A0 00 B1 3C 20 DA FD
02B8- A2 01 20 4A F9 C8 C0 08
02C0- D0 F1 F0 02 00 00 A2 01
02C8- 20 4A F9 A0 00 B1 3C 09
02D0- B0 C9 A0 B0 04 A9 A0 B0
02D8- 06 C9 E0 90 02 E9 20 20
02E0- ED FD C8 C0 08 D0 E6 A9
02E8- 8D 20 ED FD 18 A5 3C 85
02F0- 40 69 08 85 3C A5 3D 85
02F8- 41 69 00 85 3D 90 9C 60
0300- 18 90 6B A9 04 D0 27 A5
0308- 1F 4C DA FD A9 01 D0 02
0310- A9 02 48 20 E3 03 85 49
0318- 84 48 A0 0C 68 91 48 20
0320- E3 03 20 D9 03 B0 06 A9
0328- 00 A0 0D 91 48 60 48 20
0330- E3 03 84 48 85 49 A0 04
0338- B1 48 85 1E C8 B1 48 85
0340- 1F 68 85 49 A9 24 85 48
0348- A2 02 A0 03 18 E5 1D 29
0350- 0F 0B 18 69 B0 C9 BA 90
0358- 02 69 06 91 48 88 28 B0
0360- 09 B5 1D 4A 4A 4A 4A 38
0368- B0 E7 CA D0 DF 60 20 E3
0370- 03 BC C0 03 8D C1 03 A9
0378- B6 85 48 AD E5 03 85 49
0380- A0 00 B1 48 D0 0D A5 CC
0388- 8D C2 03 A5 CD A6 CA A4
0390- CB 90 0B A5 6D 8D C2 03
0398- A5 6E A6 6F A4 70 8D C3
03A0- 03 8E C4 03 8C C5 03 60
```

Patch.

```
10  IF GO THEN 170
20 GO = 1
30 KB =  - 16384:KS =  - 16368:MD
    = 661
40  TEXT : CALL  - 936
50  PRINT  CHR$ (4);"BLOAD BPATCH
    "
60  PRINT "16 SECTOR DISC PATCH :
    "
70  PRINT
80  POKE 34,5
90  GOSUB 1450
100 B =  PEEK (LP + 1) + 2
110 BB = B * 128:BB = BB + BB
120 S =  PEEK (SL) / 16:D =  PEEK
    (DR)
130  PRINT "DISC";: GOSUB 1300
140  POKE SL,S * 16: POKE DR,D: POKE
    VL,0
150  POKE BL,0: POKE BH,B
160  GOSUB 1010:DS = 0: GOTO 550
170  POKE 36,0: POKE 37,22: CALL
     - 990
180  CALL  - 868
190  PRINT
200  PRINT "      OPTION (TYPE ?
    FOR MENU) ?";
210  POKE 50,63: PRINT " ";: POKE
    50,255
220  CALL  - 868
230  POKE 36,32
240 CH =  PEEK (KB): IF CH < 128 THEN
    240
250  POKE KS,0: POKE 36,0: CALL  -
    868
260  IF CH = 212 THEN 380
270  IF CH = 194 THEN 390
280  IF CH = 208 THEN 470
290  IF CH = 210 THEN 550
300  IF CH = 215 THEN 610
310  IF CH = 171 THEN 670
320  IF CH = 173 THEN 700
330  IF CH = 206 THEN 160
340  IF CH = 195 THEN 780
350  IF CH = 191 THEN 800
360  IF CH = 155 THEN 1000
370  CALL  - 198: GOTO 170
380 DS = 0: GOTO 400
390 DS = 128
400  POKE 36,0: POKE 37,5: CALL  -
    990
410  CALL  - 868
420  POKE 37,6: CALL  - 990
430  POKE 60,DS: POKE 62,DS + 127

440  POKE 61,B: POKE 63,B
450  CALL MD
460  GOTO 170
470  POKE 36,0: POKE 37,4: CALL  -
    990
480  CALL  - 868
490  PRINT "ADDR: ";
500 MX = 255: GOSUB 1130: IF TS <
    0 THEN 170
510 AD = TS: PRINT " PATCH: ";
520  GOSUB 1130: IF TS < 0 THEN 4
    00
530  POKE BB + AD,TS:AD = AD + 1:
     IF AD > 255 THEN 400
540  PRINT "  ";: GOTO 520
550  POKE 36,0: POKE 37,4: CALL  -
    990
560  CALL  - 868
570  POKE PF,210: CALL DT
580  CALL RD
590  IF  PEEK (RP) <  > 0 THEN  GOSUB
    1550
600  GOTO 400
610  POKE 36,0: POKE 37,4: CALL  -
    990
620  CALL  - 868
630  POKE PF,215: CALL DT
640  CALL WR
650  IF  PEEK (RP) <  > 0 THEN  GOSUB
    1550
660  GOTO 170
670 S = S + 1: IF S < 16 THEN 730

680 S = 0:T = T + 1: IF T < 35 THEN
    730
690 T = 0: GOTO 730
700 S = S - 1: IF S >  = 0 THEN 7
    30
710 S = 15:T = T - 1: IF T >  = 0
     THEN 730
720 T = 34
730 DS = 0
740  POKE 37,2: CALL  - 990
750  POKE 36,26: POKE HX,T: CALL
    PX
760  POKE 36,36: POKE HX,S: CALL
    PX
770  POKE TK,T: POKE SE,S: GOTO 5
    50
780  GOSUB 1010
790  GOTO 400
800  POKE 36,0: POKE 37,6: CALL  -
    990
810  POKE 35,22: CALL  - 936
820  POKE 35,24
830  PRINT "    OPTIONS AVAILABLE
    :": PRINT
840  POKE 32,5: POKE 33,35: CALL
     - 990
850  PRINT "T  DISPLAY BYTES 00-7
    F."
860  PRINT "B  DISPLAY BYTES 80-F
    F.": PRINT
870  PRINT "R  RE-READ CURRENT SE
    CTOR."
880  PRINT "W  WRITE BACK CURRENT
     SECTOR.": PRINT
890  PRINT "+  ADVANCE A SECTOR."

900  PRINT "-  GO BACK A SECTOR."
    : PRINT
910  PRINT "N  SPECIFY A NEW SECT
    OR."
920  PRINT "C  SPECIFY A NEW SECT
    OR BUT"
930  PRINT "   DO NOT READ IT IN.
    ": PRINT
940  PRINT "P  PATCH THE CURRENT
    SECTOR"
950  PRINT "   IN MEMORY."
960  POKE 32, PEEK (32) - 1: CALL
     - 990
970  PRINT "ESC END."
980  POKE 32,0: POKE 33,40: CALL
     - 990
990  GOTO 170
1000  TEXT : END
1010  POKE 36,19: POKE 37,2: CALL
     - 990
1020  PRINT " TRACK ";:MX = 34: GOSUB
    1130
1030  IF TS < 0 THEN 1010
1040 T = TS: POKE TK,T
1050  PRINT " SECTOR ";:MX = 15: GOSUB

    1130
1060  IF TS < 0 THEN 1010
1070 S = TS: POKE SE,S
1080  POKE 36,0: POKE 37,3: CALL
.     - 990
1090  CALL  - 868
1100  POKE 37,4: CALL  - 990
1110  CALL  - 868
1120  RETURN
1130  CALL  - 868
1140 CH =  PEEK (36):CV =  PEEK (
    37): POKE 51,128
1150  CALL  - 662
1160  POKE 36,CH: POKE 37,CV: CALL
     - 990
1170 PT = 512:CH =  PEEK (PT):TS =
     - 1: IF CH = 141 THEN 1280
1180 TS = 0
1190  IF CH = 131 THEN  END
1200 CH = CH - 176
1210  IF CH < 0 THEN 1290
1220  IF CH > 22 THEN 1290
1230  IF CH < 10 THEN 1250
1240 CH = CH - 7: IF CH < 10 THEN
    1290
1250 TS = TS * 16 + CH: IF TS > M
    X THEN 1290
1260 PT = PT + 1:CH =  PEEK (PT):
     IF CH <  > 141 THEN 1190
1270  POKE HX,TS: CALL PX
1280  CALL  - 868: RETURN
1290  CALL  - 198: GOTO 1130
1300  POKE  - 16368,0: CALL  - 86
    8
1310  PRINT " SLOT ";:SD = S:MX =
    8: GOSUB 1340:S = SD
1320  PRINT " DRIVE ";:SD = D:MX =
    3: GOSUB 1340:D = SD
1330  CALL  - 868: RETURN
1340 CH =  PEEK (36)
1350  POKE 50,63: PRINT SD;: POKE
    50,255
1360  POKE 36,CH
1370 CH =  PEEK ( - 16384): IF CH
    < 128 THEN 1370
1380  POKE  - 16368,0
1390  IF CH = 141 THEN 1440
1400 CH = CH - 176
1410  IF CH > 0 AND CH < MX THEN
    1430
1420  CALL  - 198: GOTO 1370
1430 SD = CH
1440  PRINT SD;: RETURN
1450 GI = 768:DT = 771:PX = 775:R
    D = 780:WR = 784:IP = 960:LP
    = 962:HP = 964
1460  CALL GI
1470 I = IP: GOSUB 1530:IB = J
1480 I = LP: GOSUB 1530:LO = J
1490 I = HP: GOSUB 1530:HI = J
1500 SL = IB + 1:DR = IB + 2:VL =
    IB + 3:TK = IB + 4:SE = IB +
    5:BL = IB + 8:BH = IB + 9:RP
    = IB + 13
1510 HX = 31:PF = 1059
```

(continued on next page)

Sub exterminator.

```
*5600.5920

5600- 07 00 10 00 03 01 F4 01
5608- 70 02 F5 02 09 03 1D 03
5610- 4B 49 49 49 49 49 29 2D
5618- 2D F5 DB 1B 4D 49 DE DB
5620- 2B 2D 2D F5 DB 1B 2D 2D
5628- 2D DE DB 2B 2D 2D 6D 49
5630- 49 49 49 49 29 DE DB DB
5638- DB DB DB DB DB DB DB DB
5640- DB 1B 4D 49 0D 2D 2D 2D
5648- 2D 2D 2D 2D 2D 2D 2D 2D
5650- 2D 2D 2D F5 DB DB DB DB
5658- DB DB DB DB DB DB DB DB
5660- 0D 2D 0D 0D 2D 2D 2D 2D
5668- 2D 2D 2D 2D 2D 4D 49 4D
5670- 29 DE DB DB DB DB DB DB
5678- DB DB DB DB DB DB 2D 2D
5680- 2D 2D 2D 2D 6D 49 49 49
5688- 49 49 49 4D F1 DB DB DB
5690- DB DB DB DB DB DB DB DB
5698- DB DB 2D 2D 2D 2D 6D 49
56A0- 49 49 4D 09 4D 09 4D 09
56A8- 2D 0D F5 DB DB DB DB DB
56B0- DB DB DB DB DB DB DB DB
56B8- 4D 49 49 49 49 49 49 49
56C0- 49 49 49 49 4D DE DB DB
56C8- DB DB DB DB DB DB DB DB
56D0- DB DB 6B 49 49 49 49 49
56D8- 49 49 49 49 49 49 49 F5
56E0- DB DB DB DB DB DB DB DB
56E8- DB DB DB DB 1B 2D 2D 2D
56F0- 2D 2D 2D 2D 2D 2D 2D 2D
56F8- 2D 2D 2D 2D 2D 2D 2D 2D
5700- 4E 09 00 4B 49 49 49 49
5708- 49 09 2D 2D 2D DE DB 6B
5710- 49 F1 DB 1B 2D 2D 2D DE
5718- DB 2B 2D 2D F5 DB DB DB
5720- DB DB DB DB 1B 6D 49 49
5728- 49 49 49 2D 2D 2D DE DB
5730- DB DB DB DB DB DB 2B 2D
5738- 2D 2D 2D 2D 2D 2D 2D 2D
5740- 2D 2D 2D 2D 6D 69 49 F1
5748- DB DB DB DB DB DB DB DB
5750- DB DB DB DB 6D 09 4D 49
5758- 2D 2D 2D 2D 2D 2D 2D 2D
5760- 6D 69 2D 0D DE DB DB DB
5768- DB DB DB DB DB DB DB DB
5770- 6B 09 4D 49 49 49 49 49
5778- 09 2D 2D 2D 2D 2D 2D F5
5780- DB DB DB DB DB DB DB DB
5788- DB DB DB DB 6D 2D 4D 09
5790- 4D 09 4D 09 4D 49 49 09
5798- 2D 2D 2D 2D F5 DB DB DB
57A0- DB DB DB DB DB DB DB DB
57A8- DB 1B 4D 4D 49 49 49 49
57B0- 49 49 49 49 49 49 49 DE
57B8- DB DB DB DB DB DB DB DB
57C0- DB DB DB DB 2B 4D 49 49
57C8- 49 49 49 49 49 49 49 49
57D0- 49 09 DE DB DB DB DB DB
57D8- DB DB DB DB DB DB DB 2D
57E0- 2D 2D 2D 2D 2D 2D 2D 2D
57E8- 2D 2D 2D 2D 2D 2D 2D 2D
57F0- 2D 2D 0E 00 4B 49 49 29
57F8- 1E F5 F5 DB 2D 2D 2D 2D
5800- 6D 69 09 4D F1 DB DB DB
5808- DB DB DB DB 2B 2D 2D 2D
5810- 2D 2D 2D 2D 2D 2D 2D 2D
5818- 2D F5 DB DB DB DB DB DB
5820- DB DB 1B 6D 49 49 0D 4D
5828- 49 0D 4D 49 49 DE DB DB
5830- DB DB DB DB DB DB DB 2D
5838- 4D 49 09 0D 4D 4D 0D 4D
5840- 49 49 F5 DB DB DB DB DB
5848- DB DB DB DB 2B 4D 49 09
5850- 2D 4D 49 0D 4D 49 49 DE
5858- DB DB DB DB DB DB DB DB
5860- 2B 2D 2D 2D 2D 2D 2D 2D
5868- 2D 2D 2D 2D 2D 75 09 00
5870- 4B 49 49 49 49 49 49 49
5878- F5 F5 F5 DB DB DB DB DB
5880- 6B 09 4D 69 29 2D 2D 2D
5888- 2D DE DB DB DB DB DB DB
5890- DB 2D 2D 2D 2D 2D 2D 2D
5898- 2D 2D 2D 2D 2D 2D DE DB
58A0- DB DB DB DB DB DB DB 6B
58A8- 49 49 69 4D 49 2D 4D 49
58B0- 09 F5 DB DB DB DB DB DB
58B8- DB DB DB 2B 4D 49 49 0D
58C0- 4D 4D 0D 4D 49 09 2D DE
58C8- DB DB DB DB DB DB DB DB
58D0- DB 4D 49 49 0D 4D 49 0D
58D8- 4D 49 09 F5 DB DB DB DB
58E0- DB DB DB DB 1B 2D 2D 2D
58E8- 2D 2D 2D 2D 2D 2D 2D 2D
58F0- 2D 2D 4E 01 00 4B F1 6B
58F8- 0D DE 2B F5 1B 2D 2D DE
5900- 2B F5 1B 0D 0D DE 4E 01
5908- 00 4B 09 1E 2D DE 2D DE
5910- 2D DE 2D DE 2B 2D F5 DB
5918- 6B 0D 0D 0E 00 FF 00 00
5920- 00
*3D0G
```

(continued from previous page)

```
1520  RETURN
1530 J =  PEEK (I + 1): IF J > 12
     7 THEN J = J - 256
1540 J = J * 128:J = J + PEEK
     (I): RETURN
1550  PRINT "";"ERR ";
1560  POKE HX, PEEK (RP): CALL PX

1570  PRINT " AT S"; PEEK (SL) /
     16;" D"; PEEK (DR);" TRK ";
1580  POKE HX, PEEK (TK): CALL PX

1590  PRINT " SEC ";
1600  POKE HX, PEEK (SE): CALL PX

1610  PRINT
1620  RETURN
```

Sub exterminator

The graphics on this game from Mark Heather of Cudham are excellent, and the play is exciting once the controls have been mastered. Having tried for some time, both looking at the listing and running the program, I can still not deduce the submarine's strategy or quite how to stay afloat for any length of time, but that is what makes it so interesting. Mr Heather does not say what utility he used to generate his graphics elements, but they are quite superb.

Sub exterminator.

```
10  REM  SUB-EXTERMINATOR
15  REM  BY M.J.HEATHER
20  REM  ON APPLE 2
25  REM  30/4/83
30  REM
35  IF  PEEK (22016) = 7 AND  PEEK
     (22017) = 0 THEN  GOTO 45
40  PRINT  CHR$ (4);"BLOAD SUB SH
    APES"
45  POKE 232,0: POKE 233,86
50  CLEAR : GOSUB 615: GR : TEXT

52  ONERR  GOTO 5000
55 M$ = "*** YOU HIT ***
      ***YOU HIT ***"
60 N$ = "                *** YOU HIT
    ***                "
65  HOME : PRINT "INSTRUCTIONS:-"
    : PRINT
70  PRINT : PRINT "YOU HAVE TO LI
    NE YOUR BOAT WITH THE SUB"
75  PRINT "THEN LAUNCH A MINE, BU
    T YOU ONLY HAVE"
80  PRINT "10 MINES !!!": PRINT
85  PRINT "THE SUB CAN ALSO BLOW
    YOU OFF THE FACE"
90  PRINT "OF THE EARTH , SO BEWA
    RE AND GOOD LUCK!": PRINT : PRINT

    "CONTROLS:-": PRINT
95  PRINT "LEFT ARROW    = MOVE LE
    FT"
100  PRINT "RIGHT ARROW  = MOVE R
    IGHT"
105  PRINT "SPACE BAR     =  MINE
    LAUNCH"
110  PRINT
115  PRINT "ANY OTHER KEY TO MOVE
     SHIP TO RANDOM ": PRINT "PO
    SITION AND ANCHOR"
120  INVERSE : PRINT "WARNING YOU
     LOSE A MINE AFTER DOING THI
    S";: NORMAL : PRINT
125  FLASH : PRINT "PRESS SPACE B
    AR TO START";: NORMAL
130  GET A$
135  REM  START OF GAME
140  HGR : HCOLOR= 3: SCALE= 1: ROT=
    0:W = 10: REM     SET GRAPHIC
    S AND NO. OF MINES
145  HOME
150  VTAB 21: PRINT "MINES = ";W;

155  PRINT  TAB( 30);"SCORE = ";S
    C
160 S =  INT ( RND (1) * 80) * 3 +
    10
165 R = 3
170  IF S < SM THEN R = 4
175 E =  PEEK ( - 16384):OX = X: VTAB
    21: PRINT "MINES = ";W;: PRINT
     TAB( 30);"SCORE = ";SC:E =
    E - 128: IF E = 8 THEN X = X
     - 8
180  IF E = 21 THEN X = X + 8
185  IF E = 32 THEN  GOTO 260
190  IF E > 32 THEN X =  INT ( RND
    (1) * 235 + 1): POKE  - 1636
    8,0:W = W - 1: IF W = 0 THEN
     GOTO 550
195  IF X < 1 THEN X = 1
200  IF X > 235 THEN X = 235
205  IF X > OX THEN Z = 1
210  IF X < OX THEN Z = 2
215  IF  RND (1) > .85 THEN  GOTO
    400
220  DRAW Z AT X,3
225  POKE PI, INT ( RND (1) * 30 +
    100): POKE DU,4: CALL NO: HPLOT
    0,15 TO 279,15: IF SM < S THEN
    D = SM + 5
230  IF SM > S THEN D = SM - 5
235 SM = D: DRAW R AT SM,150: IF
    SM > (S - 3) AND SM < (S + 3
    ) THEN  HGR : GOTO 160
240  VTAB 21: PRINT "MINES = ";W;
    : PRINT  TAB( 30);"SCORE = "
    ;SC: XDRAW Z AT X,3: XDRAW R
     AT SM,150: GOTO 175
245  REM
250  REM  SHIP FIRING
255  REM
260  DRAW Z AT X,3: XDRAW R AT SM
    ,150: HPLOT X + 10,5: FOR A =
    10 TO 150 STEP 15: DRAW 5 AT
    X + 10,A
265  POKE PI,SM: POKE DU,3: CALL
    NO
270  XDRAW R AT SM,150
275  IF SM < S THEN D = SM + SC
280  IF SM > S THEN D = SM - SC
285 SM = D: DRAW R AT SM,150: XDRAW
    R AT SM,150
290  IF SM > (S - 5) AND SM < (S +
    5) THEN S =  INT ( RND (1) *
    86) * 3 + 10: DRAW Z AT X,3:
     HPLOT 0,15 TO 279,15:R = 3:
     IF S < SM THEN R = 4: DRAW
    R AT SM,150
295  VTAB 21: PRINT "MINES = ";W;
    : PRINT  TAB( 30);"SCORE = "
    ;SC
300  XDRAW 5 AT X + 10,A
305  XDRAW R AT SM,150
310  NEXT A
315  IF X + 10 > (SM - 1) AND X +
    10 < (SM + 26) THEN 345
320 W = W - 1: IF W = 0 THEN  GOTO
    550
325  HGR : GOTO 175
330  REM
335  REM  HIT SUB
340  REM
345  GR : HOME :SC = SC + 1
350  PRINT "YOU HIT THE SUB . SCO
    RE = ";SC
355  FOR J = 1 TO 15 STEP 2: POKE
    DU,1: FOR C = 1 TO 5:F =  INT
    ( RND (1) * 15) + 1: POKE PI
    ,F: CALL NO: NEXT C
360  COLOR= J: FOR H = 0 TO 39: POKE
    PI,40 - H: CALL NO: HLIN 0,3
    9 AT H: NEXT H: NEXT J
365  TEXT : HOME : FLASH : FOR V =
    1 TO 24: POKE PI,V * 2: POKE
    DU,10: CALL NO: PRINT M$;N$;
    : NEXT V: NORMAL
370  FOR I = 1 TO 20: POKE PI,255
     - I: CALL NO: POKE 32,20 -
    I: POKE 33,2 * I: PRINT : PRINT
    : NEXT : FOR I = 1 TO 24: POKE
    PI,SC * 10: CALL NO: PRINT :
     NEXT
375 X =  INT ( RND (1) * 35) + 1
380  HGR : GOTO 175
385  REM
390  REM  SHIP HIT
395  REM
400  DRAW R AT SM,150: DRAW Z AT
    X,3
405  FOR A = 150 TO 3 STEP  - 5: DRAW
    6 AT SM + 10,A: XDRAW 6 AT S
    M + 10,A: NEXT A
410  IF SM + 10 > X AND SM + 10 <
    (X + 40) THEN  GOTO 425
415  HGR
420  GOTO 175
425  TEXT : HOME : FOR A = 1 TO 1
    2
430  PRINT "Y Y OOO U U  GGG OOO
    TTT  H H III TTT !"
435  POKE PI,20: POKE DU,50: CALL
    NO
440  PRINT "Y Y O O U U  G G O O
     T   H H  I   T  !"
445  POKE PI,45: CALL NO
450  PRINT " YY O O U U  G   O O
     T   H H  I   T  !"
455  POKE PI,50: CALL NO
```

HGR strings.

```
10  REM   *** HGR STRINGS *** W.K
    .HO
20  DIM CA(23),CH(48,6)
30  ONERR  GOTO 750
40  FOR I = 0 TO 5: READ C(I): NEXT

50  DATA  1,2,3,5,6,7
60  REM  *** SET CORE ADDRESS FOR
    LINE
70  FOR I = 0 TO 23
80  READ CA(I): NEXT I
90  DATA  8192,8320,8448,8576,870
    4,8832,8960,9088
100 DATA  8232,8360,8488,8616,87
    44,8872,9000,9128
110 DATA  8272,8400,8528,8656,87
    84,8912,9040,9168
120 REM  *** LOAD BIT PATTERN
130 FOR I = 0 TO 48
140 FOR K = 0 TO 6
150 READ CH(I,K): NEXT K
160 NEXT I
170 GOTO 390
180 DATA  0,0,8,28,8,0,0,0,0,8,8
    ,8,4,0,0,0,0,28,0,0,0
190 DATA  0,0,0,8,0,0,0,0,32,16,
    8,4,2,0
200 DATA  28,34,34,34,34,34,28,8
    ,8,8,8,8,8,8,28,34,16,8,4,2,
    62
210 DATA  28,34,32,24,32,34,28,2
    4,20,18,18,62,16,16,62,2,2,3
    0,32,34,28
220 DATA  28,34,2,30,34,34,28,62
    ,32,32,16,8,4,2,28,34,34,28,
    34,34,28
230 DATA  28,34,34,60,32,34,28,0
    ,8,8,0,8,8,0
240 DATA  0,8,8,0,8,8,4,0,16,8,4
    ,8,16,0,0,0,28,0,28,0,0
250 DATA  0,4,8,16,8,4,0,8,20,20
    ,16,8,0,8,8,20,28,20,12,20,8

260 DATA  8,28,34,34,62,34,34
270 DATA  30,34,34,30,34,34,30
280 DATA  28,50,2,2,2,50,28
290 DATA  30,34,34,34,34,34,30
300 DATA  62,2,2,30,2,2,62,62,2,
    2,30,2,2,2
310 DATA  28,34,2,2,58,34,28,34,
    34,34,62,34,34,34,8,8,8,8,8,
    8,8,32,32,32,32,34,34,28
320 DATA  50,10,6,6,10,26,50,2,2
    ,2,2,2,62,34,54,42,42,34,3
    4,34,34,38,42,42,42,50,34
330 DATA  28,34,34,34,34,34,28
340 DATA  30,34,34,30,2,2,2,28,3
    4,34,34,42,26,44,30,34,34,30
    ,10,18,50
350 DATA  28,34,2,28,32,34,28,62
    ,8,8,8,8,8,8,34,34,34,34,34,
    34,28
360 DATA  34,34,20,20,28,8,8,34,
    34,42,42,62,54,34,34,54,20,8
    ,20,54,34
370 DATA  34,34,20,28,8,8,8,62,3
    2,16,28,4,2,62
380 DATA  0,0,0,0,0,0,0
390 GOSUB 760: GOSUB 630: GOTO 7
    10
400 PRINT : PRINT : PRINT : PRINT
410 REM  *** NOW READY TO WRITE
420 HGR : REM  *** TEXT
430 PRINT : PRINT : PRINT : PRINT
    "GIVE TEXT STRING-/ CLR SCRN
    :RET TO EXIT": INPUT S$
440 IF S$ <  > "" GOTO 460
450 RETURN
460 IF S$ = "/" THEN  HGR : GOTO
    430: REM  ** "/" TO WIPE SCR
    EEN
470 K =  INT ( RND (1) * 25):L =
     INT ( RND (1) * 20)
480 GOSUB 490: GOTO 430
490 N =  LEN (S$): REM  *** WRITE

500 IF N + K > 39 THEN N = 39 -
    K
510 FOR I = 1 TO N
520 SB$ =  MID$ (S$,I): REM  ***
    READ EACH CHARACTER IN STRIN
    G
530 J =  ASC (SB$):J = J - 43
540 IF J >  - 1 AND J < 48 GOTO
    570
550 J = 48
560 REM  *** WRITE CHARACTER
570 FOR M = 0 TO 6
580 A = CA(L) + K + M * 1024 - 1
590 POKE A + I,CH(J,M)
600 NEXT M
610 NEXT I
620 RETURN
630 TEXT : HOME : REM  *** MENU
640 VTAB 5
650 PRINT "HGR TEXT $TRING GENER
    ATOR": PRINT : PRINT "BY W.K
    .HO-MAY,1983": PRINT : PRINT

660 PRINT "THIS PROGRAM GENERATE
    S TEXT STRINGS": PRINT "IN H
    GR MODE"
670 PRINT "THIS IS A DEMONSTRATI
    ON": PRINT : PRINT "OPTIONS:
    "; PRINT : PRINT "0-MENU": PRINT
    "1-TEXT STRINGS:/TO CLEAR:RE
    T TO EXIT"
680 PRINT "2-SINE DEMO": PRINT "
    3-RANDOM WALK": PRINT "4-AUT
    O STRINGS": PRINT "5-AUTO SE
    QUENCE": PRINT "9-END"
690 VTAB 24
700 PRINT : RETURN
710 PRINT "CHOOSE OPTIONS-": PRINT
    "0-MENU:1-TEXT STR:2-SINE DE
    MO": PRINT "3-RANDOM WALK:4-
    AUTO TEXT:5-SEQ:9-EXIT": GET
    T:T = T + 1
720 IF T > 6 THEN  END
730 ON T GOSUB 630,420,780,1040,
    1270,1310
740 GOTO 710
750 PRINT "ERROR-REENTER!": GOTO
    710
760 R$(0) = "START":R$(1) = "NO.1
    ":R$(2) = "NO.2":R$(3) = "NO
    .3":R$(4) = "NO.4"
770 R$(5) = "NO.5":R$(6) = "NO.6"
    :R$(7) = "NO.7":R$(8) = "END
    ": RETURN
780 N =  INT ( RND (1) * 6)
790 IF (N >  - 1 AND N < 6) GOTO
    810
800 N = 0
810 HCOLOR= C(N)
820 PRINT : PRINT : PRINT "SINE-
    DEMO"
830 XO = 0
840 X = 0
850 Y = X
860 HGR
870 YO = XO
880 PI = 3.14159
890 HPLOT 4,80 TO XO,YO + 80
900 FOR I = 1 TO 80
910 X = X + 3
920 Y = 80 + YO +  INT (40 *  SIN
    (I * 0.1 * PI))
930 HPLOT  TO X,Y
940 NEXT I
950 N = N + 1
960 IF (N < 5) GOTO 980
970 N = 0
980 HCOLOR= C(N)
990 X = XO + 6
1000 YO = X / 2
1010 XO = X
1020 IF (XO < 26) GOTO 890
1030 K = 10:L = 2:S$ = "SINE FUNC
    TION": GOSUB 490: RETURN
1040 HGR : REM  *** RANDOM WALK
1050 N =  INT ( RND (1) * 6)
1060 HCOLOR= C(N): FOR I = 70 TO
    90: HPLOT 100,I TO 120,I: NEXT

1070 PRINT : PRINT : PRINT "RAND
    OM WALK"
1080 NN =  INT ( RND (1) * 6):K =
    17:L = 11:S$ = "START": GOSUB
    490
1090 FOR P = 1 TO 7
1100 HCOLOR= C(NN)
1110 HPLOT 110,80
1120 XO = 110
1130 YO = 80
1140 FOR F = 1 TO 100
1150 X = XO +  INT (19 *  RND (1)
    ) - 9
1160 Y = YO +  INT (19 *  RND (1)
    ) - 9
1170 IF (X < 0) OR (X > 220) GOTO
    1230
1180 IF (Y < 0) OR (Y > 150) GOTO
    1230
1190 HPLOT  TO X,Y
1200 XO = X
1210 YO = Y
1220 NEXT F
1230 NN = NN + 1
1240 IF (NN < 6) GOTO 1260
1250 NN = 0
1260 K =  INT (XO / 7 + 1):L =  INT
    (YO / 8 + 1):S$ = R$(P): GOSUB
    490: NEXT P: RETURN
1270 HGR : REM  *** RANDOM TEXT
1280 VTAB 24: PRINT : PRINT : PRINT
    "RANDOM TEXT"
1290 FOR P = 1 TO 20:K =  INT ( RND
    (1) * 25 + 1):L =  INT ( RND
    (1) * 20 + 1):V =  INT ( RND
    (1) * 9):S$ = R$(V): GOSUB 4
    90: NEXT P: RETURN
1300 FOR PS = 1 TO 5000: NEXT : RETURN
1310 GOSUB 630: GOSUB 1300: GOSUB
    780: GOSUB 1300: GOSUB 1040:
     GOSUB 1300: GOSUB 1270: GOSUB
    1300: RETURN
```

HGR strings

The Apple high-resolution graphics mode is limited by the lack of any dedicated character set for user applications such as captioning of the graphics display. This has resulted in more reinventing of wheels of so many shapes that I have long since lost count of how many have come my way. However, this utility from Mr W K Ho of Cheltenham is particularly attractive and commands attention.

Though comparatively short it compiles a character set by specifying each character in a bit pattern occupying a seven-by-eight matrix which corresponds to the size of each screen character in the Text mode. The starting addresses of each print line within HGR are also identified.

Various self-documented options are in-built to demonstrate different combinations of graphics and text. The appropriate areas of code may be included within user programs as desired.

```
460 PRINT "  Y O O U U  G G O O
     T   HHH  I   T  !"
465 POKE PI,55: CALL NO
470 PRINT "  Y O O U U  GGG O O
     T   H H  I   T  !"
475 POKE PI,60: CALL NO
480 PRINT "  Y O O U U    G O O
     T   H H  I   T  !"
485 POKE PI,65: CALL NO
490 PRINT "  Y OOO UUU    G OOO
     T   H H III  T  !"
495 POKE PI,70: CALL NO
500 NORMAL
505 IF A = 9 THEN  HOME : FLASH

510 IF A = 10 THEN  INVERSE
515 IF A < 9 THEN  PRINT
520 NEXT A
525 PRINT "YOU LIVED TO SCORE ";
    SC;" POINTS"
530 END
535 REM
540 REM  GAME OVER
545 REM
550 FOR A = 1 TO 20: POKE DUR,5:
     FOR B = 15 TO 1 STEP  - 1: POKE
    PIT,B: CALL NOISE: NEXT B: NEXT
    A
555 FOR A = 1 TO 255: POKE DUR,1
    : POKE PI,A: CALL NO: NEXT A
    : TEXT : HOME
560 FOR A = 1 TO 24
565 PRINT "GAME OVER";
570 INVERSE : PRINT " GAME OVER
    ";: NORMAL
575 PRINT "GAME OVER";
580 FLASH : PRINT " GAME OVER ";
    : NORMAL
585 NEXT A
590 PRINT "YOU RAN OUT OF MINES,
    BUT SCORED ";SC;" PTS."
595 END
600 REM
605 REM  MUSIC LOCATIONS
610 REM
615 POKE 768,160: POKE 769,255: POKE
    770,162
620 POKE 771,160: POKE 772,202: POKE
    773,208
625 POKE 774,253: POKE 775,173: POKE
    776,48
630 POKE 777,192: POKE 778,136: POKE
    779,208
635 POKE 780,245: POKE 781,96
640 NO = 768: REM  NOISE ROUTINE
645 PI = 771:DU = 769: REM  PITCH
     & DURATION ROUTINES
650 RETURN
5000 FOR A = 1 TO 50
5010 POKE PI,A: POKE DU,250 - A:
    CALL NO
5020 NEXT A
5030 TEXT : HOME
5040 PRINT "SILLY": PRINT "=====
    "
5050 PRINT : PRINT "(R)UN , (Q)U
    IT >>>?";: GET P$
5060 IF P$ = "R" THEN  CLEAR : GOTO
    40
5070 IF P$ = "Q" THEN  HOME : END

5080 GOTO 5030
```

No1 source for software

SOFT OPTION SOFTWARE CENTRE

When you're thinking software, think Soft Option first. Chances are we'll have the right product, in the right format, on the shelf in quantity.

We despatch fast from stock. We also offer a dealer pricing system to suit individual needs with cumulative discounts available.

Finally, we *know* about software—we can give you technical support when it's needed.

So make Soft Option your first call. We'll soon become your first choice.

8 BIT | 16 BIT | 16 BIT

CP/M 80 CP/M 86 MS-DOS

and IBM PC Software

SOURCES INCLUDE:

We hold stocks of most software manufacturers including:

MICROPRO
MICROSOFT
DIGITAL RESEARCH
SORCIM
IUS
ASHTON TATE

MACHINE FORMATS INCLUDE:

Software can be made available in 8 BIT or 16 BIT formats to suit most micro-computers currently on the market including:

Superbrain
North Star Horizon
North Star Advantage
Columbia PC • IBM PC
Televideo • Apple
CP/M 8" • Rair • Sirius

PROGRAMS INCLUDE:

Our complete list of software is too long to publish and changes by the hour but here are a few examples to whet your appetite.

WORDSTAR	MICROPRO's comprehensive word processing system.
PL/I-80	DIGITAL's PL/I Compiler.
BASIC-80	MICROSOFT's popular and powerful basic Interpreter. There is a Compiler too.
FORTRAN-80	Fortran Compiler to ANSI X3.9 1966 except COMPLETE data.
SUPERCALC	SORCIM's spread sheet and modelling system.
EASYFILER	Data Recording System for the IBM PC from IUS.
dBASE II	Relational Database Management from Ashton Tate.

RING THE SOFTLINE Grantham (0476) 860171

All products are supplied complete with full originator's documentation.
Please send large s.a.e. for full details.
TRADE ENQUIRIES WELCOME.

BARCLAYCARD VISA

Soft option

SOFTWARE CENTRE

The Soft Option (UK) Ltd. Home Farm House Colsterworth Grantham Lincolnshire NG33 5HZ Tel: Grantham (0476) 860171

● Circle No. 190

RESEARCH MACHINES REVIEW



Helicopter rescue

IN THIS program by Steve Crick of Herne Bay, Kent you are the pilot of a helicopter which must land on an oil rig to pick up survivors and take them over to the waiting ship. Do not try to land on the oil rig if you already have survivors, as the overload will cause you to crash.

Winds can come from the left or right in forces from weak to gale force. At higher skill levels they can become stronger.

Because the computer has a read-ahead keyboard, if you keep hitting the direction you need to go in it will remember the sequence and carry it out. If you tap the Down key when landing, the buffer will remember Down and on take off you will crash. An auto repeat is incorporated into the game so the key need only be pressed once.

The machine code called at 750 works as a Get statement, but does so slightly faster.

Summary of listing.

10—130	Set up computer
140—470	Set user characters
480—730	Draw graphics
740—840	Move
850—970	Check position
980—1100	Random wind
1110—1230	Pick up survivors
1240—1380	Crash into rig
1390—1470	Land on ship with no survivors
1480—1620	Land on ship with survivors
1630—1750	Land in sea
1760—1900	Flown too high
1910—2160	Game over
2170—2390	Instructions
2400—2450	Lines cut out of main loop
2460—2530	Machine code
2540—2680	Skill level

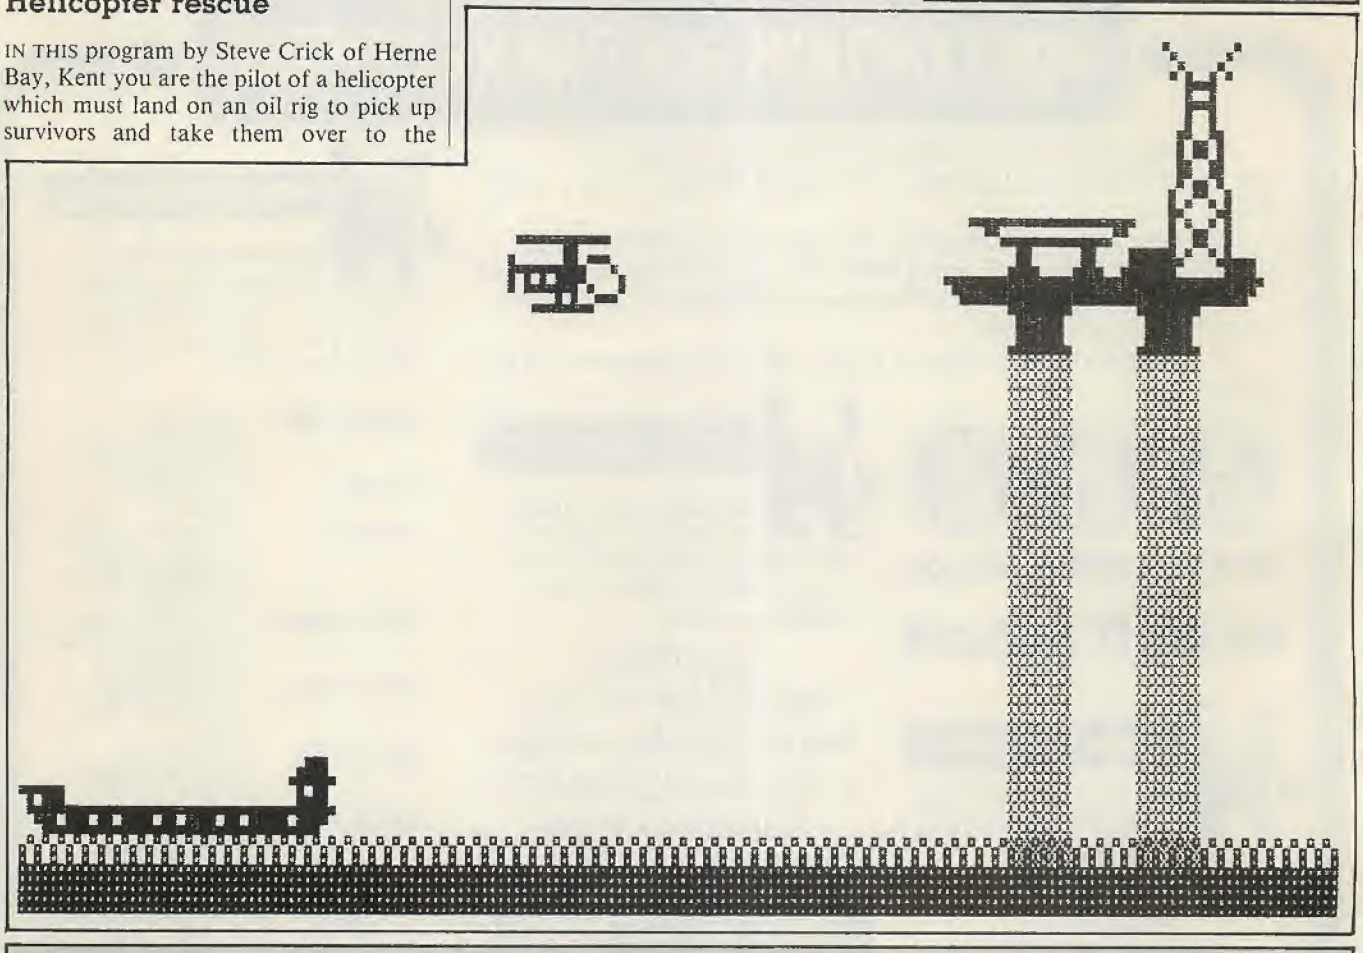

Helicopter rescue

```
10 REM NORTH SEA OIL RIG RESCUE
20 REM Steve crick. May/83
30 REM Herne Bay Secondary School
40 REM For RML 480Z with level 2
50 REM High Resolution Graphics
60 RANDOMIZE
70 CALL"RESOLUTION",0,2
80 CLEAR 2000
90 GOSUB 2460
100 GOSUB 2170
110 GRAPH
120 ME=3
130 HS=1090
140 REM              SET CHARACTERS
150 CALL"DEFCHAR",1,0,0,0,252,92,127,59,31
160 CALL"DEFCHAR",2,0,0,0,0,0,255,183,255
170 CALL"DEFCHAR",3,14,30,63,22,30,255,222,252
180 CALL"DEFCHAR",4,63,0,64,127,85,95,1,15
190 CALL"DEFCHAR",5,252,192,220,226,225,209,78,240
200 CALL"DEFCHAR",6,16,8,4,10,3,2,3,2
210 CALL"DEFCHAR",7,8,16,32,80,192,64,192,64
220 CALL"DEFCHAR",8,2,6,5,5,6,6,5,9
230 CALL"DEFCHAR",9,64,96,160,160,96,96,160,144
240 CALL"DEFCHAR",10,10,12,10,9,9,250,252,248
250 CALL"DEFCHAR",11,80,48,80,144,144,80,62,30
260 CALL"DEFCHAR",12,255,255,255,255,126,126,126,255
270 CALL"DEFCHAR",13,255,254,252,0,0,0,0,0
280 CALL"DEFCHAR",14,255,127,63,0,0,0,0,0
290 CALL"DEFCHAR",15,255,255,255,0,0,0,0,0
300 CALL"DEFCHAR",16,0,0,31,6,1,0,0,0
310 CALL"DEFCHAR",17,0,0,255,0,255,96,96,240
320 CALL"DEFCHAR",18,0,0,255,6,248,97,97,243
330 CALL"DEFCHAR",19,255,255,255,255,255,255,255,255
340 CALL"DEFCHAR",20,85,170,170,255,255,255,255,255
350 SH$=CHR$(1)+CHR$(2)+CHR$(2)+CHR$(2)+CHR$(3)
360 HE$=CHR$(4)+CHR$(5)
370 OT$=CHR$(6)+CHR$(7)
380 OM$=CHR$(8)+CHR$(9)
390 OH$=CHR$(16)+CHR$(17)+CHR$(18)+CHR$(10)+CHR$(11)
400 OB$=CHR$(14)+CHR$(12)+CHR$(15)+CHR$(12)+CHR$(13)
410 LE$=CHR$(19)+CHR$(32)+CHR$(19)
420 BS$=CHR$(32)+CHR$(48)+CHR$(32)+CHR$(32)+CHR$(32)
430 SE$=CHR$(20)
440 BL$=CHR$(19)
450 ME$=STR$(ME)
460 HS$=STR$(HS)
470 SC$=STR$(SC)
480 REM                DRAW
490 CALL"COLOUR",0,20
500 CALL"COLOUR",1,180
```

```
510 PLOT 0,59,"SCORE"
520 PLOT 27,59,"LIVES"
530 PLOT 48,59,"HI SCORE"
540 IF FX=1 THEN GOTO 570
550 FX=1
560 PLOT 11,59,BS$
570 PLOT 38,59,ME$
580 PLOT 64,59,HS$
590 CALL"FILL",0,180,320,200,2
600 A=200:X=48
610 X1=60:Y1=61:X2=60:Y2=61
620 FOR X=1 TO 50 STEP 8
630 CALL"STPLOT",A,X,VARADR(LE$),1
640 NEXT
650 CALL"STPLOT",A-8,X,VARADR(OB$),3
660 CALL"STPLOT",A-8,X+8,VARADR(OH$),3
670 CALL"STPLOT",A+16,X+16,VARADR(OM$),3
680 CALL"STPLOT",A+16,X+24,VARADR(OT$),3
690 FOR X=0 TO 320 STEP 8
700 CALL"STPLOT",X,0,VARADR(SE$),2
710 NEXT
720 CALL"STPLOT",0,8,VARADR(SH$),3
730 CALL"STPLOT",X1,Y1,VARADR(HE$),3
740 REM            MOVE
750 CALL&6000
760 IF INT(RND(1)*15)=3 THEN GOSUB 980
770 P=PEEK(&SFFF)
780 IF P<>OTHENO=P ELSE P=0
790 IF P=&0A THEN Y1=Y1-2
800 IF P=&0B THEN Y1=Y1+2
810 IF P=&08 THEN X1=X1-3
820 IF P=&18 THEN X1=X1+3
830 X1=X1+LW
840 X1=X1-RW
850 IF X1<202 AND X1>190 AND Y1=71 THEN FG=1:GOTO 2400
860 IF X1>300 THEN X1=0
870 IF X1<0 THEN X1=300
880 IF Y1<8 THEN GOTO 1630
890 IF X1<18 AND X1>6 AND Y1=11 THEN FG=2:GOTO 2400
900 IF Y1<70 AND X1<222 AND X1>184 THEN 1240
910 IF Y1>170 THEN 1760
920 CALL"STPLOT",X2,Y2,VARADR(HE$),0
930 CALL"STPLOT",X1,Y1,VARADR(HE$),3
940 CALL"STPLOT",216,81,VARADR(OT$),3
950 CALL"STPLOT",216,73,VARADR(OM$),3
960 X2=X1:Y2=Y1
970 GOTO 750
980 REM          WIND
990 PUT 12
1000 W=INT(RND(1)*3)
1010 S=INT(RND(1)*5)
1020 IF S=0 THEN WI$="Weak"
1030 IF S=1 THEN WI$="Mild"
1040 IF S=2 THEN WI$="Moderate"
1050 IF S=3 THEN WI$="Strong"
1060 IF S=4 THEN WI$="Gail force"
1070 IF W=0 THEN ?WI$;" wind from the Right":RW=S+1+SK:LW=0
1080 IF W=1 THEN ?WI$;" wind from the Left":RW=0:LW=S+1+SK
1090 IF W=2 THEN ?"Wind dropped":LW=0:RW=0
1100 RETURN
1110 REM              PICK UP
1120 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1130 CALL"STPLOT",X1,Y1,VARADR(HE$),3
1140 PUT 12
1150 SU=INT(RND(1)*8)+10
1160 ?"You have succesfully landed"
1170 ?"and picked  up ";SU" survivers"
1180 FL=1
1190 FORT=1TO2000:NEXTT
1200 GOSUB 980
1210 P=&0B:O=&0B
1220 CALL"STPLOT",X1,Y1,VARADR(HE$),0
1230 GOTO 740
1240 REM          CRASH 1
1250 PUT 12
1260 ?"You have crashed into the Oilrig"
1270 IF FL=1 THEN ?"killing all of your survivers"
1280 ME=ME-1
1290 FORT=1 TO2000:NEXTT
1300 FL=0
1310 PUT 12
1320 IF ME=0 THEN 1910
1330 ME$=STR$(ME)
1340 PLOT 38,59,ME$
1350 X1=60:Y1=61
1360 P=&0B:O=&0B
1370 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1380 GOTO480
1390 REM       LAND WITHOUT
1400 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1410 CALL"STPLOT",X1,Y1,VARADR(HE$),3
1420 PUT12
1430 ?"Why land without any survivers?"
1440 FORT=1TO1000:NEXTT
1450 P=&0B:O=&0B
1460 CALL"STPLOT",X1,Y1,VARADR(HE$),0
1470 RETURN
1480 REM          LAND WITH
1490 PUT12
1500 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1510 CALL"STPLOT",X1,Y1,VARADR(HE$),3
1520 ?"Well done you have scored ";SU*10
1530 SC=SC+(SU*10)
1540 ST=ST+SU
1550 SC$=STR$(SC)
1560 PLOT 11,59,SC$
1570 FL=0
1580 FORT=1 TO2000:NEXTT
1590 P=&0B:O=&0B
1600 CALL"STPLOT",X1,Y1,VARADR(HE$),0
1610 A$="A":B$="A"
1620 GOTO 750
1630 REM          SEA
1640 PUT 12
1650 ?"You have crashed into the sea"
1660 IF FL=1 THEN?"killing all of your survivers"
1670 ME=ME-1
1680 FL=0
1690 X1=60:Y1=61
1700 FORT=1 TO 1000:NEXTT
1710 PUT 12
1720 IF ME=0 THEN 1910
1730 ME$=STR$(ME)
1740 PLOT 38,59,ME$
1750 GOTO 740
1760 REM            TOO HIGH
1770 PUT 12
1780 ?"You have flown too high"
1790 IF FL=1 THEN ?"killing all of your survivers"
1800 ME=ME-1
1810 X1=60:Y1=61
1820 FL=0
1830 FORX=1TO2000:NEXTX
1840 IF ME=0 THEN 1910
1850 ME$=STR$(ME)
1860 PLOT 38,59,ME$
1870 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1880 PUT 12
1890 P=&0B:O=&0B
1900 GOTO 960
1910 REM              END
1920 CALL"STPLOT",X2,Y2,VARADR(HE$),0
1930 PUT 12
1940 ?"You have sent the rest of"
1950 ?"the crew to a watery grave"
1960 ?"You saved ";ST;"men."
1970 IF SC>HS THEN HS=SC
1980 HS$=STR$(HS)
1990 PLOT 64,59,HS$
2000 SC=0
2010 ST=0
2020 SU=0
2030 FX=0
2040 A$=""
2050 B$=""
2060 ME=3
2070 ME$=STR$(ME)
2080 SC$=STR$(SC)
2090 FL=0
2100 FORT=1TO3000:NEXTT
2110 PUT 12
2120 ?"Do you want another go? (Y/N)"
2130 C$=GET$()
2140 IF C$="Y" OR C$="y" THEN GOSUB 2540:GOTO480
2150 IF C$="N" OR C$="n" THEN CALL"CLEAR":TEXT:END
2160 GOTO 2130
2170 REM            INSTRUCTIONS
2180 TEXT
2190 PUT 31
2200 ?"        North Sea Oil Rig Rescue"
2210 ?"        ________________________"
2220 ?:?"          Steve Crick.  May/83"
2230 ?"          ______________________"
2240 ?:?"              Instructions"
2250 ?"              ____________"
2260 ?:?"Due to a fault in the Oil Rig's legs"
2270 ?"it is in danger of collapsing. You are"
2280 ?"the pilot of the helicopter that is"
2290 ?"trying to save the workers. To make"
2300 ?"things worse there are unpredictable"
2310 ?"winds in the north sea, making your"
2320 ?"landings difficult."
2330 ?:?"   You use the ARROW keys to move"
2340 ?"       Any other key to stop"
2350 ?:?"           Any key to play"
2360 A=GET()
2370 GOSUB 2540
2380 PUT 12
2390 RETURN
2400 REM               CUT DOWN
2410 IF FL=0 AND FG=1 THEN FG=0:GOTO 1110
2420 IF FL=1 AND FG=1 THEN FG=0:GOTO 1240
2430 IF FL=0 AND FG=2 THEN FG=0:GOSUB 1390
2440 IF FL=1 AND FG=2 THEN FG=0:GOTO 1480
2450 GOTO 750
2460 REM            MACHINE CODE
2470 POKE &6000,&F7
2480 POKE &6001,&02
2490 POKE &6002,&32
2500 POKE &6003,&FF
2510 POKE &6004,&5F
2520 POKE &6005,&C9
2530 RETURN
2540 REM          SKILL
2550 CALL"RESOLUTION",0,2
2560 TEXT
2570 PUT 31
2580 ?"       Input Your Skill Level:-"
2590 ?"       ________________________"
2600 ?:?"0=Easy"
2610 ?:?"1=Hard"
2620 ?:?"2=Very Hard"
2630 ?:INPUT"Level=",SK
2640 IF SK<0 OR SK>2 THEN 2570
2650 ?:?"Any key to play"
2660 C$=GET$()
2670 PUT 12:GRAPH
2680 RETURN
```

NEWBRAIN NERVE CENTRE

by David Watt

General-purpose graph

THE FIRST program is a general-purpose line graph program developed by Robert Lewsley, designed to take the tedium out of drawing graphs from measurements he takes in the course of his work. Three options are available. You may input from keyboard or tape, or input from keyboard while simultaneously copying the data to tape. The program allows you to specify the titles, ranges and scale positions for both the x- and y-axes. Then you may input the x and y co-ordinates.

The program plots the graph as each set of co-ordinates is input, checking that the x value is greater than at the previous point. You can make multiple plots by specifying x and y values of zero to move the current position back to the start. Lines 2700 to 3160 display full instructions for using the program.

General-purpose graph.

```
1000 REM ******************************
1010 REM - general purpose graph program
1020 REM - copyright R. Lewsley 1983
1030 REM
1040 REM ******************************
1050
1060 ON BREAK GOTO 3210
1070
1080 REM ******************************
1090
1100 e$="Invalid input - try again"
1110 e2$="Text too long - limit = 20 cha
     rs."
1120 CLOSE£2:OPEN£0,4,"200":GOSUB 2700
1130 CLOSE£129
1140 PUT 31
1150 PRINT "Enter processing option (KB:
     KS:TI) ":LINPUT (": ")po$
1160 IF po$="KB" OR po$="kb" OR po$="KS"
      OR po$="ks" OR po$="TI" OR po$="ti
     " THEN 1180
1170 PRINT "Invalid processing option -
     try again":PUT 12:GOTO 1150
1180 PUT 31
1190 IF po$="KB" OR po$="kb" THEN po=1:G
     OTO 1330
1200 IF po$="KS" OR po$="ks" THEN  po=2:
     GOTO 1280
1210
1220 REM - tape input
1230
1240 po=3:PRINT "Load input tape at corr
     ect point.":PRINT "Press play then
     press newline when ready":LINPUT x$
     :OPENIN£2,1,"graph.data":GOTO 1330
1250
1260 REM - keyboard input plus save
1270
1280 PRINT "Load new tape at start point
     , and press":PRINT "record/play.":P
     RINT "Then press newline when ready
     .":LINPUT x$:OPENOUT£2,1,"graph.dat
     a":GOTO 1330
1290
1300 REM - open graphics screen
1310 REM   and draw skeleton
1320
1330 PUT 31:OPEN£129,11,"w200":plotrng(1
     0,10),pla(0,0),mve(0,9.9)
1340 plotdeg,tby(-90),mby(9.9),tby(-90)
1350 plotmby(9.9),tby(-90),mby(9.9)
1360
1370 IF po=3 THEN LINPUT£2,x$:GOTO 1490

1380
1390
1400 REM - begin getting titles
1410 REM   and ranges
1420
1430 PRINT "Please enter title for graph
     "
1440 LINPUT (": ") x$
1450 IF LEN(x$)(2) THEN 1490
1460 PUT 31:PRINT e2$
1470 GOTO 1440
1480
1490 plotrng(100,100)
1500 IF LEN(x$)=0 THEN x$="       "
1510 IF po=2 THEN PRINT£2,x$
1520 x=(100-LEN(x$)*3)/2-3:IF x(0 THEN x
     =1
1530 plotpla(x,94),x$
1540 plotpla(0,0)
1550 PUT 31
1560 IF po=3 THEN INPUT£2,xl,xh,yl,yh:GO
     TO 1750
1570
1580
1590 ON ERROR GOTO 1630
1600 PRINT "Enter low and high values fo
     r X (nn,nn)"
1610 INPUT xl,xh
1620 GOTO 1640
1630 ON ERROR GOTO 0:PRINT e$:PUT 12:RES
     UME 1590
1640 IF xh-xl ) 0 THEN 1660
1650 PRINT e$:PUT 12:GOTO 1590
1660 PUT 31
1670 ON ERROR GOTO 1710
1680 PRINT "Enter low and high values fo
     r Y (nn,nn)"
1690 INPUT yl,yh
1700 GOTO 1720
1710 ON ERROR GOTO 0:PRINT e$:PUT 12:RES
     UME 1670
1720 IF yh-yl ) 0 THEN 1740
1730 PRINT e$:PUT 12:GOTO 1670
1740 ON ERROR GOTO 0
1750 PUT 31
1760 IF po=2 THEN PRINT£2,xl,xh,yl,yh
1770 IF po=3 THEN INPUT£2,x$:GOTO 1840
1780 PRINT "Enter title for X axis"
1790 LINPUT x$
1800 IF LEN(x$)(21 THEN 1830
1810 PRINT e2$
1820 PUT 12:GOTO 1780
1830 IF LEN(x$)=0 THEN x$="X axis"
1840 x=(100-LEN(x$)*3)/2-3:IF x(0 THEN x
     =1
1850 plotpla(x,01),x$
1860 PUT 31
1870 IF po=2 THEN PRINT£2,x$
1880 IF po=3 THEN INPUT£2,x$:GOTO 1940
1890 PRINT "Enter title for Y axis"
1900 LINPUT x$
1910 IF LEN(x$)(21 THEN 1940
1920 PRINT e$
1930 PUT 12:GOTO 1890
1940 IF LEN(x$)=0 THEN x$="Y axis"
1950 IF po=2 THEN PRINT£2,x$
1960 x=(100-LEN(x$)*3)/2-3:IF x(0 THEN x
     =1
1970 x=100-x
1980 FOR i=1 TO LEN(x$)
1990 plotpla(1,x),MID$(x$,i,1)
2000 x=x-4
2010 NEXT i
2020 plotcen(5,7),pla(0,0)
2030 x$=STR$(xl):x=LEN(x$)-1
2040 x$=LEFT$(x$,x)
2050 x=LEN(x$)-1
2060 x$=RIGHT$(x$,x)
2070 plotpla(-3,-6),x$
2080 x$=STR$(xh):x=LEN(x$)-1
2090 x$=LEFT$(x$,x)
2100 x=LEN(x$)-1
2110 x$=RIGHT$(x$,x)
2120 x=95-(x*4)
2130 plotpla(x,-6),x$
2140 x$=STR$(yh):x=LEN(x$)-1
2150 x$=LEFT$(x$,x)
2160 x=LEN(x$)-1
2170 x$=RIGHT$(x$,x)
2180 plotpla(-3,87),x$
2190 x$=STR$(yl):x=LEN(x$)-1
2200 x$=LEFT$(x$,x)
2210 x=LEN(x$)-1
2220 x$=RIGHT$(x$,x)
2230 plotpla(-3,-2),x$
2240 x=xh-xl:y=yh-yl
2250 plotrng(x,y),cen(0,0)
2260 xp=0-x/10:yp=0-y/10
2270 PUT 31
2280 FOR i=1 TO 10
2290 xp=xp+x/10:plotpla(xp,0),mve(xp,y/1
     00)
2300 yp=yp+y/10:plotpla(0,yp),mve(x/100,
     yp)
2310 NEXT i
2320 plotpla(0,0):xo=xl-1
2330
2340 PUT 31
2350 IF po()3 THEN 2460
2360
2370 REM - draw graph from tape data
2380
2390 INPUT£2,x$
2400 IF ASC(x$)=4 THEN PUT 31:PRINT "Dis
     play complete - press newline":PRIN
     T "to terminate run.":LINPUT x$:STO
     P
2410 xp=VAL(x$):INPUT£2,x$:yp=VAL(x$):GO
     TO 2510
2420
2430 REM - begin drawing using keyboard
2440 REM   input
2450
2460 ON ERROR GOTO 2500
2470 PRINT "Enter X and Y coordinates (n
     n,nn)"
2480 INPUT xp,yp
2490 GOTO 2510
2500 ON ERROR GOTO 0:PRINT e$:PUT 12,12:
     RESUME 2460
2510 ON ERROR GOTO 0
2520 IF xp()0 OR yp()0 THEN 2570
2530 plotpla(0,0):xo=xl-1:IF po=1 THEN P
     UT 12:GOTO 2460
2540 IF po=3 THEN 2390
2550 x$=STR$(xp):PRINT£2,x$:x$=STR$(yp):
     PRINT£2,x$
2560 GOTO 2340
2570 IF po=3 THEN 2630
2580 IF xp)=xl AND xp(=xh THEN 2600
2590 PRINT e$:PUT 12:GOTO 2460
2600 IF yp(yl OR yp)yh THEN 2590
2610 IF xp(=xo THEN 2590
2620 IF po=2 THEN x$=STR$(xp):PRINT£2,x*
     :   x$=STR$(yp):PRINT£2,x$
2630 xo=xp
2640 xp=xp-xl:yp=yp-yl
2650 plotmve(xp,yp)
2660 GOTO 2340
2670
2680 REM - user instruction routine
2690
2700 PUT 31
2710 x$="General Purpose Graph Program"
2720 PRINT TAB(20-LEN(x$)/2);x$
2730 x$="(c) Copyright R. Lewsley 1983"
2740 PRINT TAB(20-LEN(x$)/2);x$
2750 PUT 10
2760 PRINT "Do you require instructions
     y/n ";:LINPUT x$
2770 IF x$="n" OR x$="N" THEN 3170
2780 IF x$="y" OR x$="Y" THEN PUT 31:GOT
     O 2800
2790 PUT 12:GOTO 2710
2800 PRINT "This program will draw a gra
     ph using"
2810 PRINT "either keyboard or tape inpu
     t data."
2820 PUT 10:PRINT "If keyboard input is
     selected "
2830 PRINT "the program will initially r
     equest a"
2840 PRINT "title for the graph,then ask
      for the"
2850 PRINT "low and high range values of
      the"
2860 PRINT "X (horizontal) and Y (vertic
     al) axes."
2870 PUT 10
2880 PRINT "It will then request heading
     s and scale"
2890 PRINT "mark values for these two ax
     es."
2900 PUT 10
2910 PRINT "At this stage a skeleton lay
     out"
2920 PRINT "will be drawn and you will b
     e asked"
2930 PRINT "to begin entering the X and
     Y values.":PUT 10,10,10
2940 LINPUT ("press newline to continue"
     )x$:PUT 31
2950 PRINT "Plotting will be done immedi
     ately and"
2960 PRINT "each new set of X,Y values w
     ill be"
2970 PRINT "checked to ensure that X is
     greater"
2980 PRINT "than its previous value."
2990 PUT 10
```

(continued on page 158)

OKI
MICROLINE

Microline 84

Highest performance and reliability place these printers on top of the Microline printer series. The printhead is designed for over 200 Million character printing.

Printing speed is 200 cps in data processing mode and 50 cps is achieved in correspondence quality mode. Character types are user defined.
A choice of character sets is permanently stored in the printer's EPROMs.
Additional memory space is provided to store one's own specific character set. This happens by down-bading the specific character set from one's computer to the printer before the printout begins.

The carriage width of 136 characters allows the use of A4 paper in portrait or landscape formats, from an optionally available single sheet feeder.

The interface parts allow for parallel or serial data transfer – buffered or unbuffered –, from most popular desk top computers and widely used PC's.

MICROLINE – more than 150. 000 printers in Europe in use.

OKI OKI ELECTRIC EUROPE GmbH
Emanuel-Leutze-Str. 8 · D-4000 Düsseldorf 11
Telefon 02 11/59 20 31 · Telex 8 587 218

U.K. X-Data Ltd.
F-705/751 Deal Avenue
Trading Estate, Slough
Berkshire SL1 4SH
Tel.: 0044-753-72331
Tlx: 051-847728

COUPON
Please send me/us more information to:
☐ MICROLINE 84
☐ The whole MICROLINE program
PC10

Name:
Street:
City:
Phone:

● Circle No. 247

Bounce.

```
10 FOR a=1 TO 255:CLOSE£a:NEXT a
20 OPEN£1,0,1,"150":OPEN£2,0,2,"150"
30 OPEN£3,11,1,"£1,220":OPEN£4,11,2,"£2,
     220"
40 plot£4,rng(30,20),deg,pla(15,1),arc(1
     5,360),pla(15,2),fil
50 plot£3,rng(30,20),deg,pla(15,5),arc(1
     5,360),pla(15,7),fil
60 PRINT£1
70 FOR a=1 TO 200:NEXT a
80 PRINT£2
90 FOR a=1 TO 200:NEXT a
100 ON BREAK GOTO 120
110 GOTO 60
120 CLOSE£3:CLOSE£4
130 PUT 31,23,65
140 LIST
150 END
```

Rotate.

```
10 FOR a=1 TO 255:CLOSE£a:NEXT a
20 OPEN£0,0,"150":OPEN£1,0,1,"150":OPEN£
     2,0,2,"150"
30 OPEN£3,11,"220":OPEN£4,11,1,"£1,220":
     OPEN£5,11,2,"£2,220"
40 FOR c=3 TO 5
50 plot£c,rng(30,20),deg,pla(15,10)
60 NEXT c
70 plot£4,trn(120):plot£5,trn(240)
80 PRINT
90 FOR a=1 TO 4
100 FOR b=1 TO 5
110 FOR c=3 TO 5
120 plot£c,arc(b,90),tby(90),arc(b,90),t
     by(90)
130 NEXT c
140 NEXT b
150 FOR c=3 TO 5
160 plot£c,tby(90)
170 NEXT c
180 NEXT a
190 PRINT£1
200 FOR a=1 TO 50:NEXT a
210 PRINT£2
220 FOR a=1 TO 50:NEXT a
230 PRINT
240 FOR a=1 TO 50:NEXT a
250 GOTO 190
```

Format. 40.

```
2000 REM "format.40" by R. Lewsley.
2010
2020 REM Program to print hard copy
2030 REM lists of programs in a 40 col
2040 REM format for publication.
2050
2060 REM Input to this program is a tape
2070 REM "list" of the program created
2080 REM using the LIST command
2090 REM e.g.
2100 REM to create the tape load the
2110 REM program to be formatted
2120 REM then enter the following
2130
2140 REM      openout£1,1
2150 REM      list£1
2160 REM      print£1,chr$(4)
2170 REM      close£1
2180 REM the list tape is now ready for
2190 REM use as input to this program
2200
2210
2220 OPEN£0,0,"124"
2230
2240 CLOSE£8:OPEN£8,8,"1200"
2250
2260 PUT 31:PRINT TAB(35);"Format.40";TA
     B(65);"by R. Lewsley"
2270 PUT 10:PRINT TAB(20);"Load ""list""
      tape in tape 1 and press play"
2280
2290 CLOSE£1:OPEN£1,1
2300 lc=99:pc=0:x$=" "
2310 PUT£8,30,27,66
2320 LINPUT£1,a$
2330 IF a$=CHR$(4) THEN CLOSE£1:PUT 31:P
     RINT "READY":END
2340 IF LEN(a$)=0 THEN 2320
2350 m=40
2360 x$=" ":CLEAR x$
2370 IF lc < 51 THEN 2430
2380 PUT£8,12
2390 pc=pc+1
2400 PRINT£8,"Page";pc:PUT£8,10
2410 lc=1
2420
2430 l=LEN(a$)
2440 IF l > m THEN 2510
2450 x$=x$+a$
2460 PRINT£8,x$
2470 lc=lc+1
2480 GOTO 2320
2490
2500
2510 i=m
2520 x$=x$+LEFT$(a$,i)
2530 l=l-i
2540 a$=RIGHT$(a$,l)
2550 PRINT£8,x$
2560 lc=lc+1
2570 m=35
2580 x$="      "
2590 GOTO 2440
```

(continued from page 156)

```
3000 PRINT "Multiple plots may be made b
     y entering"
3010 PRINT "zero for both X and Y, this
     will move"
3020 PRINT "the current plotting positio
     n back to"
3030 PRINT "the start point."
3040 PUT 10,10,10
3050 PRINT "To terminate the program pre
     ss the"
3060 PRINT "stop key followed by newline
     ."
3070 PUT 10,10:LINPUT ("press newline to
      proceed")x$
3080 PUT 31
3090 PRINT "Three processing options are
      available."
3100 PUT 10:PRINT "KB - meaning keyboard
      input for "
3110 PRINT "      immediate display only.
     "
3120 PUT 10:PRINT "KS - meaning keyboard
      input for display"
3130 PRINT "      plus save to tape for l
     ater use."
3140 PUT 10:PRINT "TI - meaning display
     previously saved"
3150 PRINT "      data from tape input."
3160 PUT 10,10:LINPUT ("press newline to
      proceed ")x$
3170 PUT 31:RETURN
3180
3190 REM CLOSEDOWN ROUTINE
3200
3210 ON BREAK GOTO 0:IF pc=2 THEN 3240
3220 CLOSE£2:CLOSE£129
3230 PUT 31:PRINT "READY":END
3240 PRINT£2,CHR$(4)
3250 GOTO 3220
```

Format 40

This program by Robert Lewsley prints program listings in the 40-column format preferred by this magazine. I certainly found it useful in preparing some of the listings. Lines 2140 to 2170 describe how to store a program on tape prior to printing it. I found it better to specify a file name when storing my programs using the commands:

OPEN OUT£1,1,"progrm name" in place of the command on line 2140

Once your program is stored, Format 40 just has to be loaded and run to list it out. Line 2310 outputs some special initialisation characters for the Oki Microline 82a printer. It may have to be changed for your own printer.

Multiple screens

One of the most powerful features of the Newbrain is its ability to open a number of streams for one device. In particular, you can set up multiple screen displays which can be switched between at will.

Edward Thomas from Clapton, London E5, sent in two programs which demonstrate this very well and also illustrate some of the features of the Newbrain high-resolution graphics. The first program, Bounce, opens two display streams on ports 1 and 2, and two linked graphics streams. It then draws a circle on each graphics stream and fills them in. Finally, the program goes into a loop where each stream is displayed in turn with a time delay between each display. The resulting effect is of a bouncing ball.

The second program is slightly more complex, using three streams. When run, Rotate will draw a four-pointed petal which, when completed, will start spinning anti-clockwise. Graphics use rather a lot of memory so three screens is the limit for this type of display with the standard system, and fully animated cartoons are out of the question.

Many useful facilities can still be provided with text displays. For example, help information and option menus could be stored on separate streams from the main display, to be called up as required. It is also possible to plot to one stream while the other stream is being displayed. Provided it does not take too long to plot the changes between displays, it should be possible to perform limited animation.

DIAL-TEXT 50

TYPEWRITER TO TYPEWRITER COMMUNICATION

DIAL-TEXT 50 is a simple to use electronic typewriter (ET) to electronic typewriter communications device. It is plug compatible with the OCTET 121 and HERMIT 21 interfaces designed by Duplex and can also be used with any RS232 device such as a microcomputer or printer.

Simple to install

Installation is easy and no special wiring is required – communication is achieved by simple cable connection or through any acoustic coupler. For instance, the user can simply place the DIAL-TEXT 50 unit and acoustic coupler between an OCTET 121 or HERMIT 21 typewriter and a standard telephone handset for transmission of ERROR FREE letters and documents (or telex messages) to a remote DIAL-TEXT 50 unit and acoustic coupler; nationally or internationally.

Typical application

The DIAL-TEXT 50 unit is ideal for remote offices which would like to use the main office telex facilities; Text can be prepared at the remote office and transmitted to the main office to cut telex paper tape for forward transmission. Incoming telexes for the remote office would receive messages in the reverse manner.

Special Dial-Text 50 features & benefits

1. 16,000 CHARACTER MEMORY. Retains contents when power is off.
2. ERROR free messages through use of automatic ERROR DETECTION and CORRECTION facility.
3. TRANSMISSION SPEED approx. 5 times faster than a standard telex machine, providing the FULL range of typewriter characters and symbols, upper-case and lower-case.
4. MENU DRIVEN through a 16 character display.
5. OPERATORS CONTROL PANEL for message viewing and deletion.
6. INCOMING/OUTGOING messages automatically differentiated by special character.
7. ABILITY TO PRINT (retrieve) messages from the DIAL-TEXT 50 unit at any time.
8. ABILITY TO STORE messages onto a standard tape cassette unit. (Ask for the OCTET or HERMIT TI unit)
9. CONVENIENT/CONFIDENTIAL MESSAGE HANDLING. ie use own secretary as operator.
10. PORTABLE lightweight stand-alone unit with own 240v power supply which can be shared within the office.
11. DIAL-TEXT 50 allows local text processing without the need to transmit messages.
12. COST of transmission limited to normal telephone rates.
13. MESSAGE SCRAMBLER facility. (optional).

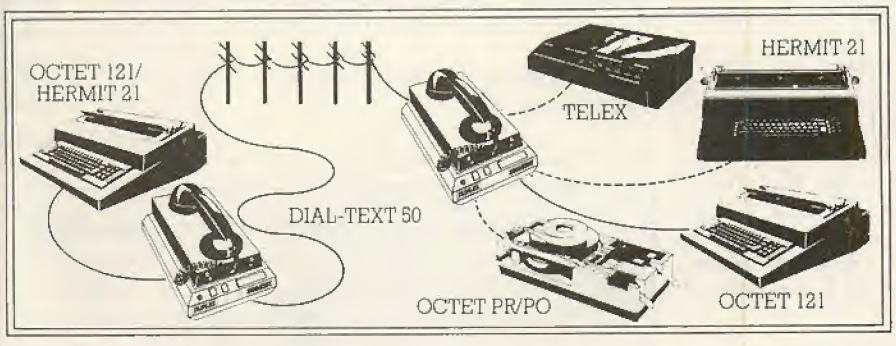

Full details from *sole suppliers:*

DUPLEX
Communications Ltd.

The Interface People

Midlands/North—2 Leire Lane, Dunton Bassett, Nr. Lutterworth, Leicestershire LE17 5JP. Tel: 0455 209131
South—52 High Street, Stock, Essex CM4 9BW. Tel 0277 841011

● Circle No. 191

User-defined I/O routines

A LITTLE PIECE of detective work has enabled Larry Carasco of Dollis Hill to produce the program which will allow the Spectrum stream facilities to be utilised. The streams will be used with the Sinclair Microdrives and networking board.

Anybody who already has some form of I/O device attached to their Spectrum might be able to put this program to use immediately. A channel consists of five bytes of code which define which routines are being used for I/O. The format is:

- Address of output routine,
- Address of input routine,
- File name.

The file name consists of a single character — of which more later. The Spectrum has a series of 19 streams which indicate where the channels are situated, of which 16 are available to the user. A stream is simply a 16-bit pointer to a channel. The address of the first channel is in Chans, 23631.

A stream which has been opened contains a pointer, which is 0 if the stream is closed. The channel to which it points is at

CHANS + pointer − 1.

Thus if Chans is 23734 and the pointer is 6 then the channel is at address 23739.

The Spectrum manual states that Strms is at 23568, the address of the first stream pointer. However, the streams at 23568, 23570 and 23572 are not available to the user so the address of the first user stream, called Stream 0, is 23574. The address of any given stream is at

23574 + 2 × stream number

where the stream is any number between 0 and 15. The contents of this address plus Chans minus 1 gives the channel its uses. Table 1 shows the stream addresses, their pointers and the channel data they point to.

Streams 0 to 3 are normally used by the Spectrum for display and input. Streams 0 and 1 point to the same channel and are used to write to screen lines 22 and 23 and also to read the keyboard. Stream 2 is used by the Print and List statements to output to lines 0 to 21. Stream 3 is used by the printer; LPrint and LList use this stream.

Examining the channels which these streams point to clarifies the I/O structure. Table 2 shows the channels which the Spectrum sets up on default. The channel data is situated at Chans to Chans + 19.

The subroutine at 2548 is a conventional output routine, and 4264 is an input routine which returns characters entered from the keyboard. The routine at 3969 probably requires extra hardware to function as intended. The routine at 5572 causes error J to occur: you may not input from this device. The file name is a mnemonic for the channel's I/O port:

K = keyboard and lines 22,23
S = screen, lines 0 to 21
R = RS-232 (?)
P = Printer

No other file name is valid, and only K, S and P may be specified by the user.

Although three channels use the same output routine, Basic sets various flags to indicate which channel is being serviced. The file name decides which flags are set. This means, for instance, that when using Channel P the output is not echoed to the screen. Using this method of streams and channels reduces the amount of memory required to handle many different I/O routines.

All the streams using a particular channel have their pointers set to the same value, and all 16 streams could use the same channel — though it would be rather pointless. Five bytes of data would then service the entire I/O network. The address of the channel currently in use is held in Curchl, 23633.

A specific stream can be selected by inserting a # sign, CHR$ 35, and a stream number. For example.

PRINT #3; "Hello!"

will output to the printer. Using table 2 to help establish what effect the different channels have, try out different streams for this example. Only streams 0 to 3 are valid at present.

Inkey $,Print and Input may all use stream values. Now try

LPRINT #2; "Hi!"

A command which normally writes to the printer has been told to use Stream 2, which in turn has directed it to Channel S.

All I/O statements, except Verify, Save and Merge, always use streams but because they use default values when one has not been specified this is, perhaps, not apparent. Print defaults to Stream 2,LPrint to Stream 3 and so on. When you specify a particular stream you are directing the I/O of that statement to a chosen channel.

Contrary to the insistence of the manual, the Open and Close statements can be used without extra hardware, as you may have already discovered. When you use them you are actually defining which channel you wish that stream to use. The format is:

OPEN #stream number, file name

The valid file names are K,S and P.

Try entering

PRINT #5;"Illegal"

You should try to get an Error 0 report, but if you first enter

PRINT #5, "S"

the text should appear on the screen. What you have done is opened Stream 5 and instructed it to use Channel S. Any stream number between 4 and 15 will work.

Streams 0 to 3 will also work, but you will be altering the normal system I/O configuration. You should always take care when altering them or you may lock yourself out of the system. If you want a demonstration,

OPEN #3, "S"

is fairly safe and will cause printer output to be rerouted to the screen.

The Close statement naturally enough closes down the chosen stream. For streams 4 to 15 it resets their pointers to 0, indicating that the stream is disconnected — see table 1. Closing streams 0 to 3 results in returning their pointers to their default

Channel	Output address	Input address	File name
0	2548	4264	K
1	2548	5572	S
2	3969	5572	R
3	2548	5572	P

Table 2: The Spectrum's four channels.

Stream	Address	Pointer value	Channel address
0	23574	0001	23734
1	23576	0001	23734
2	23578	0006	23739
3	23580	0016	23749
4	23582	0000	CLOSED
5	23584	0000	CLOSED
6	23586	0000	CLOSED
7	23588	0000	CLOSED
8	23590	0000	CLOSED
9	23592	0000	CLOSED
10	23594	0000	CLOSED
11	23596	0000	CLOSED
12	23598	0000	CLOSED
13	23600	0000	CLOSED
14	23602	0000	CLOSED
15	23604	0000	CLOSED

Table 1. Breakdown of stream data, values in decimal.

values. Be careful when closing streams down: an unfortunate program bug crashes the system when you attempt to Close a stream which was never Opened.

Even though you now know how the streams and channels operate constructing your own I/O routines is not as simple as it might be. At present you have only three channels you may use, K,S and P. Any other letter is discarded as an illegal file name.

To get round this you must create your own channel by a back-door method. The program will create just such a channel. Line 20 allocates five bytes of memory for the channel data by setting up a dummy line 0. The addresses of your new I/O routines are Poked into this dummy line. Finally you must give the channel a legal file name, otherwise the system will fail to recognise it as legal and might crash when you come to close down a stream.

To allow easy access to the screen the channel can be called S. When you open a stream to Channel S using the conventional method it will still think you mean the original S channel. With the channel thus set up we simply Poke in the stream's new pointer whose value is arrived at by:

address of new channel — CHANS + 1.

To initialise any other stream to this channel just use:

LET cn = new stream number : GOTO 110

If any of the variables has been altered, run the program again specifying the new stream. The other streams will remain intact. To test the program try the following:

```
LET a = USR "a": POKE a,62: POKE
  a + 1,65:POKE a + 2,195
POKE a + 3,244:POKE a + 4,9
```

Now run the program and answer the prompts as follows:

Stream number: 3

Output routine address: USR "a"

User-defined I/O routines.

```
   10 REM 123456
   20 POKE 23756,0: POKE 23760,14
   30 INPUT "Open stream no? ";cn
   40 INPUT "Output routine addre
ss? ";outr
   50 INPUT "Input routine addres
s? ";inr
   60 LET ch=PEEK 23631+PEEK 2363
2*256
   70 LET z=23761
   80 LET a=z: LET x=outr: GO SUB
 500
   90 LET a=a+2: LET x=inr: GO SU
B 500
  100 POKE a+2,CODE f$
  110 LET a=23574+cn*2
  120 LET x=1+z-ch: GO SUB 500
  499 STOP
  500 POKE a,x-INT (x/256)*256
  510 POKE a+1,INT (x/256): RETUR
N
```

Input routine address: 5572

File name: "S"

Now try LList. Every character should appear as A: you have routed the printer stream through your own output channel which will only allow As to be printed. You could

```
POKE USR "a" + 1
```

with any other ASCII character code to output that character instead. If you try

```
PRINT INKEY$ #3
```

you will get Error J.

To erase the main program but keep initialised streams enter the following:

```
LET var = PEEK 23627 + PEEK 23628 ×
  256
LET a = var − 23771
POKE 23769,a − INT (a/256) × 256
POKE 23770,INT (a/256)
```

Delete line 20 and the program is deleted, save for line 0 which cannot be deleted because it contains the channel data.

This program only sets up a new channel for a stream to use. You must define your own I/O routines to service the channel. These routines could be used for just about any peripheral you can attach to a Spectrum, be it a networking system, a Teletype or even another Spectrum. All you need to know is that the alternative register set should not be used, the output routine should output the value in the A register — preserving it, if possible — and the input routine should return with the Carry flag set if a valid character has been received, reset if not. Unless the interrupt is disabled by your routine the routine is interruptable, so try to avoid any unorthodox stack handling.

Smooth scroll

A VARIABLE degree of scroll is provided by this routine for the Spectrum, written by Paul Maycock of Bristol. The program loads the machine-code routine in the Data statement and then saves it for future use as a subroutine in any Basic program. The routine itself when called will scroll, so to scroll one line would require a For-Next of 8.

(continued on page 163)

Smooth scroll.

```
  100 REM by P Maycock 18/1/83
  110 DATA 33,0,65,17,0,64,6,3,19
7,6,8,197,6,7,197,1,32,0,237,176
,1,224,0,9,229,213,225,9,229,209
,225,193,16,236,1,224,7,237,66,1
,32,0,237,176,1,32,0,237,66,229
  120 DATA 209,1,0,1,9,193,16,209
,1,0,7,213,225,9,1,32,0,229,237,
66,229,209,225,1,32,0,237,176,1,
0,1,213,225,9,193,16,177,33,224,
87,1,0,32,113,35,16,252,201
  130 INPUT "Start Address ?",s
  140 FOR f=0 TO 97
  150 READ a
  160 POKE s+f,a
  170 NEXT f
  190 SAVE "scroll mc"CODE s,98
  200 INPUT "Press ENTER to verif
y"; LINE a$
  210 VERIFY "scroll mc"CODE
```

Bridge hand.

```
10 DIM A(52)
20 FOR I=1 TO 52
30 LET A(I) = INT ((I-1)/13)
40 NEXT I
50 FOR I = 52 TO 2 STEP -1
60 LET T=INT(RND*I+1)
70 LET R=A(I)
80 LET A(I)=A(T)
90 LET A(T)=R
100 NEXT I
110 FOR K = 0 TO 3
120 PRINT "NORTHEAST SOUTHWEST "
    (K*5+1 TO K*5+5);
140 FOR J= 0 TO 3
150 PRINT
160 FOR I = 1 TO 13
170 IF A(J*13+I)<>K THEN GOTO 210
180 LET R$ = " " + "23456789OJQKA"
    (I)+"SHDC"(J+1)+" "
```

(listing continued on page 163)

(continued from page 161)

When the program is run it asks for the start address where the code is to be Poked. It can be anywhere in the free RAM but is most likely to be 32500 in a 16K Spectrum or 65200 in a 48K machine. To call the routine use Randomise User s, where s is the value which you input when the program asks for the start address.

Correlation coefficient

A PROGRAM for the 16K Spectrum by Michael Coombes of Caerleon, Gwent calculates the product-moment correlation coefficient of a set of data. It will be useful to anyone studying or using statistics. Instructions are included in the program.

Bridge hand

If you enjoy bridge, this short program by P A Smith will help you to keep your bidding up to the mark. It is written for the unexpanded ZX-81 and could easily be expanded to print a series of hands.

Side scroll

AN IMPROVEMENT to the routine by C D Henderson, published in the March issue, comes from M J V Moreton of Cambridge. He points out a number of faults in Mr Henderson's routine:

- Some of the scans in lines 16 to 24 are not scrolled.
- The screen attributes are not scrolled.
- Items which disappear from the screen reappear at the right-hand side ⅛in. higher.

This routine does not attempt to wrap the screen around but it does avoid the faults of the earlier version. The routine may be called by

LET variable = USR (32556)

and may be relocated elsewhere in RAM.

Side scroll.

```
 10 CLEAR 32555
 20 LET sum=0
 30 FOR n=32556 TO 32599
 40 READ a: POKE n,a
 50 LET sum=sum+a
 60 NEXT n
 70 IF sum=2944 THEN STOP
 80 PRINT FLASH 1;"Error"
 90 DATA 22,0,33,0,64
100 DATA 1,32,0,30,192
110 DATA 114,9,29,32,251
120 DATA 58,141,92,30,24
130 DATA 119,9,29,32,251
140 DATA 33,1,64,17,0
150 DATA 64,1,0,27,237
160 DATA 176,18,33,255,87
170 DATA 22,0,114,201
```

Bridge hand listing summary.

Line 10 — Initialises array A(52) to represent cards.
Lines 20 to 40 — With 13 each of 0-3 to represent players, in arbitrary order.
Lines 50 to 100 — Form random permutation.
Line 110 — Prints four hands.
Line 140 — Scans four suits.
Line 160 — Scans 13 cards per suit.
Line 170 — Checks if card belongs to hand.
Line 180 to 190 — Creates strings R$ for card.
Line 200 — Prints card.

(continued from page 161)

```
190 IF R$(2) = "0" THEN LET
    R$(1) ="1"
200 PRINT R$;
210 NEXT I
220 NEXT J
230 PRINT
240 NEXT K
```

Correlation coefficient.

```
 10 REM Product Moment
       Correlation Coefficient
       M.Coombes 1983
 12 PAPER 0: BORDER 0: CLS : IN
K 7
 15 LET sumxx=0: LET sumyy=0: L
ET sumx=0: LET sumy=0: LET sumxy
=0
 20 INPUT "How many values of x
 ? ";nx
 30 BEEP .1,1
 35 DIM x(nx): DIM y(nx)
 40 PRINT AT 15,0;"Please enter
 all the values      of x,each fo
llowed by ENTER..."
 50 FOR f=1 TO nx
 60 INPUT x(f)
 65 BEEP .1,1
 67 LET sumx=sumx+x(f)
 68 LET sumxx=sumxx+(x(f)^2)
 70 PRINT AT 19,0;"
                  ";AT 19,0;"x
 value ";f;" = ";x(f)
 80 NEXT f
 90 CLS
100 BEEP .4,10
110 PRINT AT 15,0;"Please enter
 all the values      of y,each fo
llowed by ENTER..."
120 FOR f=1 TO nx
130 INPUT y(f)
140 BEEP .1,1
141 LET sumxy=sumxy+(x(f)*y(f))
142 LET sumyy=sumyy+(y(f)^2)
145 LET sumy=sumy+y(f)
150 PRINT AT 19,0;"
                  ";AT 19,0;"y
 value ";f;" = ";y(f)
160 NEXT f
165 BEEP .4,10
170 LET suma=sumx^2: LET sumb=s
umy^2
200 REM *Calculate Coefficent*
210 LET co=(sumxy-((sumx*sumy)/
nx))/(SQR ((sumxx-(suma/nx))*(su
myy-(sumb/nx))))
300 REM *Print Answer*
310 PRINT AT 9,0;"The product m
oment correlation coefficient fo
r your data is:"''
320 PRINT INK 5;co
330 PRINT AT 15,0; INK 6;"Press
 A to enter new data"''"Press B
to exit"
340 IF INKEY$="a" OR INKEY$="A"
 THEN RUN
350 IF INKEY$="b" OR INKEY$="B"
 THEN STOP
360 GO TO 340
```

SHARP MZ-80B

Basic listing

ONE SHORTCOMING of the Sharp MZ range of computers is that they are intended to be interfaced only with Sharp's own range of printers — and they are expensive. One of the advantages of the MZ-80B is that it is available with an IEEE-488 interface which conforms exactly to the IEEE spec, unlike those offered by many of Sharp's rivals. This feature makes the MZ-80B a reliable instrument controller.

In this role it is clearly an easy matter to attach any low-cost printer to the IEEE bus to provide a convenient hard-copy medium for test results, etc. It would be convenient to list Basic programs in the same way. Unfortunately, the List commands provided in Sharp's Basic dump either to the screen or on to the printer interface if it is present.

The program by Jack Hale of Manchester overcomes this limitation when appended to an existing Basic program. It will list the program via the IEEE bus on an Epson MX-82 printer. It may be modified to suit other printers by changing the control characters in the WRT statements.

Rem lines are detected and printed in double-width characters centred in the line to form titles. This facility may be removed if not required by changing line 61200 to

WRT 4, OP$

and omitting lines 61230 to 61300.

It is convenient to position the listing routine at the end of the Basic program, hence the high line numbers. Listing of this routine may be suppressed so that only the main program is listed changing line 61500 to

IF PEEK (K + 2) + PEEK (K + 3)*256 <60000 THEN J = K:F1 = 0:GOTO 60400

The routine steps through the Basic area of memory line by line. The contents of a line are built up into a string OP$ which is sent to the printer when complete, together with the line number. Commonly used Basic words are held in memory in token form as one or two ASCII characters. The tokens deciphered by stepping through a look-up table held in the interpreter. This task is performed using a machine-code subroutine which is loaded in lines 60020 to 60095. The equivalent Basic is unacceptably slow.

Listing is initiated by entering Run 60000. To list the entire program respond to the prompt with 0. Responding with a higher number will result in that and subsequent lines being listed. To terminate the listing before the end of the program has been reached, press Break.

High-resolution dump table 1.

Bits	Screen 1,0	Screen 1,1
11	Red	Orange
10	Blue	Magenta
01	Yellow	Cyan
00	Green	Buff

Basic listing.

```
60000 REM      *** BASIC LISTING PROGRAM ***
60001 REM
60002 REM                    Jack Hale  -  UMIST  - 1982
60005 REM
60010 LIMIT $FEFF
60020 FOR I=65280 TO 65359:POKE I,0:NEXT I
60030 POKE$FF10,58:POKE$FF11,0:POKE$FF12,255          :REM  LD A,(FF00)
60035 POKE$FF15,230:POKE$FF16,127                     :REM  AND 7F
60040 POKE$FF18,6:POKE$FF19,0                         :REM  LD B,00
60045 POKE$FF1C,42:POKE$FF1D,2:POKE$FF1E,255          :REM  LD HL,(FF02)
60050 POKE$FF20,78                                    :REM  LD C,(HL)
60055 POKE$FF21,35                                    :REM  INC HL
60060 POKE$FF22,203:POKE$FF23,121                     :REM  BIT 7,C
60065 POKE$FF28,202:POKE$FF29,32:POKE$FF2A,255        :REM  JP Z,FF20
60070 POKE$FF30,184                                   :REM  CP,B
60075 POKE$FF31,202:POKE$FF32,64:POKE$FF33,255        :REM  JP Z,FF40
60080 POKE$FF38,4                                     :REM  INC B
60085 POKE$FF39,195:POKE$FF3A,32:POKE$FF3B,255        :REM  JP FF20
60090 POKE$FF40,34:POKE$FF41,8:POKE$FF42,255          :REM  LD(FF02),HL
60095 POKE$FF47,201                                   :REM  RET
60110 LIMIT $FEFF
60130 CONSOLE C40
60140 PRINT "          PROGRAM LISTING"
60160 WRT 4,CHR$(27),"A",CHR$(8),CHR$(18),CHR$(20)
60180 PRINT CHR$(1):INPUT "  INPUT START LINE NO    ";LS
60200 J=29276:F1=0:F3=-1
60300 K=PEEK(J)+PEEK(J+1)*256
60350 IF PEEK(J+2)+PEEK(J+3)*256<LS THEN J=K:GOTO 60300
60370 CONSOLE C80
60400 K=PEEK(J)+PEEK(J+1)*256:OP$=""
60500 FOR I=J+4 TO K-1
60600 IF PEEK(I)=34 THEN F3=F3*(-1)
60650 IF (F1=1)+(F3=1)+(PEEK(I)<128) THEN OP$=OP$+CHR$(PEEK(I)):GOTO 61080
60670 POKE $FF02,50:POKE $FF03,24
60700 IF PEEK(I)=128 THEN I=I+1:POKE $FF02,145:POKE $FF03,22
60800 POKE $FF00,PEEK(I)
60900 USR($FF10)
60930 KW$=""
60970 N=PEEK($FF08)+PEEK($FF09)*256
61000 IF PEEK(N)<128 THEN KW$=KW$+CHR$(PEEK(N)):N=N+1:GOTO 61000
61030 KW$=KW$+CHR$(PEEK(N)-128)
61050 IF KW$="REM" THEN F1=1
61070 OP$=OP$+KW$
61080 NEXT I
61100 WRT 4,PEEK(J+2)+PEEK(J+3)*256;" ";
61200 IF LEFT$(OP$,3)<>"REM" THEN WRT 4,OP$;:GOTO 61400
61230 IF LEN(OP$)=4 THEN WRT 4,"REM";CHR$(13);:GOTO 61400
61270 FOR A=4 TO 80:IF MID$(OP$,A,1)=" " THEN NEXT A
61280 TL=LEN(OP$)-A
61290 IF TL*2>71 THEN WRT 4,OP$;:GOTO 61400
61300 WRT 4,"REM";SPACE$((71-TL*2)/2);CHR$(14);RIGHT$(OP$,TL+1);
61400 PRINT PEEK(J+2)+PEEK(J+3)*256;" ";OP$
61500 IF PEEK(K)+PEEK(K+1)<>0 THEN J=K:F1=0:GOTO 60400
61600 END
```

High-resolution dump.

```
10 PMODE 4:SCREEN 1,1
20 FOR A = 0 TO 31
30 PRINT #-2,CHR€(27);"3";CHR€(24);
40 PRINT #-2,CHR€(27);"K";CHR€(191);CHR€(0);
50 FOR B = 1 TO 191
60 P = PEEK (7680 - (B * 32 - A))
70 PRINT #-2,CHR€(P);:NEXTB
80 PRINT #-2,CHR€(10);:NEXTA
90 GOTO 90
```

DRAGON 32

High-resolution dump

THIS PROGRAM by S J Combes of Bishop's Stortford, Hertfordshire works for PModes 3 and 4. It executes in 2.5 minutes although it does not use machine code, and dumps the screen to an Epson MX-80 MkIII. This speed improvement over the program by R A Shackleford, published in the April issue of *Practical Computing* is achieved by Peeking high-resolution screen memory and sending the values direct to the printer.

In PMode 4 the screen is stored as 192 horizontal lines of 32 bytes. If a bit is set the corresponding pixel is also set. The printer expects the bytes to be aligned vertically, which means that the picture must be printed on its side. This is a

welcome advantage as it allows side-by-side printout of page 1 and page 2 graphics.

PMode 3 is more complicated. Two bits are used for each pixel and are coded as shown in table 1. Areas of red or orange appear black; areas of blue, magenta, yellow and cyan appear grey; and green/buff appears white. To invert the picture add the line:

```
65 P = 255 — P
```

To print both screens side by side add:

```
72 PRINT # – 2, CHR£ (27); "K"; CHR£
   (191); CHR£ (0);
74 FOR B = 1 TO 191
76 P = PEEK (13824 – (B * 32 – A) )
78 PRINT # 2, CHR£ (P); :NEXT B
```

It is not necessary to merge the program to copy the screen since the high-resolution screen remains in memory after a New or a CLoad. Note that circles become ellipses when dumped. They must therefore be given a height to width ratio of 0.83 when drawn.

High resolution dump table 2.

Line	Function
10	Displays what is being printed on screen
30	Sets line spacing to 24/216 in.
40	Enter bit image mode for 191 characters
60	Peek screen location

High-resolution dump sample output.

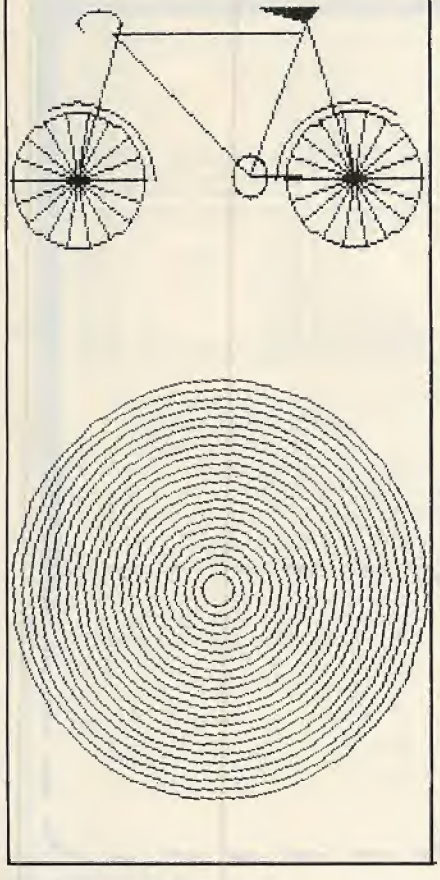

NASCOM

THIS SHORT routine by G Winstanley of Stoke-on-Trent enables professional standard mainframe or minicomputer communication via the RS-232 serial interface. Input/output is achieved via the standard Nascom Uart, and connection to and from the Modem is to the user-available serial I/0 socket.

Using the selection links of LSW2, it is possible to have speed selections of 110,300 and 1,200 baud. The only hardware modification required, and that is optional, is the connection of an acoustic warning device to bit 4 port 00H, the unused bit of the keyboard port. Control-R reinitialises the program.

The program has been kept short with the inclusion of some monitor subroutines and one restart instruction. The Blink routine maintains a blinking cursor and waits for input. It returns with the character in register A, and it is possible to detect whether input has occurred via serial in, or keyboard. One possible problem could arise if your host computer makes use of special control codes. Blink services certain control codes, such as Cursor Up, Down, etc. within itself.

Xout performs Uart output with handshaking. It is only necessary to place the output character in location OUTP prior to calling. The Kbd routine prints a character to the Nascom screen. The Cler routine clears the screen and RST 28H prints on the screen the ASCII string following, up to the first null character 00H.

Nascom as terminal.

```
                0010 ; ** NASCOM COMPUTER TERMINAL PROG. **
                0020 ;ROUTINES PERMIT TWO-WAY COMUNICATION
                0030 ;VIA RS232
                0040 ;NASCOM BECOMES A PROFFESSIONAL STANDARD
                0050 ;REMOTE TERMINAL FOR FULL DUPLEX USE
                0060 ;
                0070 ;G.Winstanley OCTOBER 1982
                0080 ;
4000            0100          ORG   4000H
                0110 ;
4000 0078       0120 BLINK    EQU   0078H    ;CURSOR & INPUT SUB.
4000 0706       0130 XOUT     EQU   0706H     ;OUTPUT ROUTINE
4000 0030       0140 KBD      EQU   0030H      ;SCREEN O/P
4000 080A       0150 SCRE     EQU   080AH     ;TOP LINE POSITION
4000 08CA       0160 POS      EQU   08CAH      ;NEW CURSOR  POS.
4000 03FA       0170 CLER     EQU   03FAH     ;CLEAR  SCREEN
4000 0C29       0180 CURS     EQU   0C29H     ;CURSOR POS. LOCATION
4000 0C28       0190 OUTP     EQU   0C28H    ;OUTPUT BUFFER
                0200 ;
4000 210640     0210 INIT     LD    HL,TINI     ;SOFTWARE PIO RESET
4003 E5         0220          PUSH  HL
4004 ED4D       0230          RETI
4006 CDFA03     0240 TINI     CALL  CLER      ;CLEAR SCREEN
4009 210A08     0250          LD    HL,SCRE     ;INIT.MESSAGE
400C 22290C     0260          LD    (CURS),HL
400F EF         0270          RST   28H         ;PRINT @ TOP
4010 2A2A204E   0280 TABL     DEFM  '** Nascom Computer Terminal **'
     6173636F
     6D20436F
     6D707574
     65722054
     65726D69
     6E616C20
     2A2A
402E 00         0290          DEFB  00H
402F 21CA08     0300 TASS     LD    HL,POS      ;PLACE CURSOR
4032 22290C     0310          LD    (CURS),HL
4035 CD7800     0320 TAPP     CALL  BLINK     ;READY TO INPUT
4038 2010       0330          JR    NZ OUT
403A FE12       0340          CP    12H         ;RESET=CONTROL R
403C 28C2       0350          JR    Z INIT      ;RE-INITIALISE
403E FE07       0360          CP    07H         ;BELL CODE?
4040 2812       0370          JR    Z BELL
4042 32280C     0380          LD    (OUTP),A  ;FOR OUTPUT
4045 CD0607     0390          CALL  XOUT      ;NASCOM O/P
4048 18EB       0400          JR    TAPP
404A 00         0410 OUT      NOP
404B FE07       0420          CP    07H         ;BELL CODE?
404D 2805       0430          JR    Z BELL
404F CD3000     0440          CALL  KBD       ;OUTPUT-SCREEN
4052 18E1       0450          JR    TAPP        ;BACK TO COMUNICATE
4054 3E10       0460 BELL     LD    A,10H       ;BIT 4 PORT 00=BELL
4056 D300       0470          OUT   (00H),A
4058 11FF1F     0480 LOPP     LD    DE,1FFFH    ;APPROX 0.1 SEC
405B 1B         0490 DEP      DEC   DE
405C 7A         0500          LD    A,D
405D B3         0510          OR    E         ;COUNT=ZERO ?
405E 20FB       0520          JR    NZ DEP
4060 18D3       0530          JR    TAPP
```

NOTICE TO ADVERTISERS

While microcomputer magazines abound, very few are as well established or as highly regarded as PRACTICAL COMPUTING, now in its sixth year of publication. The magazine concentrates on the serious side of personal computing, providing authoritative reviews of micros (mainly in the £500 — £5,000 price bracket) and the most interesting new software.
Each issue contains a special section devoted to an important area of computing such as languages, databases or printers and plotter. In addition, there are regular features on practical applications, education and an Open File section to which readers contribute their own programs.
But there is no room for complacency in this fast-moving market! In order to keep PRACTICAL COMPUTING as one of the country's leading microcomputer magazines, we have made a number of improvements, with more to follow. These are:-

1. **More editorial pages**
2. **Increased circulation to 61,100 (ABC Jan-Jun 1983)**
3. **Computerised FREE Reader Enquiry Service**
4. **Increased staff levels to provide an even better service to advertisers and readers alike**
5. **Re-designed (from November) to make PRACTICAL COMPUTING more attractive and easier to read**
6. **Recent Reader Survey providing important details on our readership**

However, these improvements have been made against a background of rising costs which have forced us to increase our advertisement rates from the January 1984 issue. All our advertisers with an existing series booking in-house will be given rate protection.
These improvements will ensure that PRACTICAL COMPUTING continues to **lead** and will go on being the best value micro magazine on the market.

To find out more about Britains leading magazine for professional and business users of personal computers contact the Practical Computing advertisement team:

LONDON
Advertisement Manager
Ian Carter 01-661 3021
Quadrant House, The Quadrant,
Sutton, Surrey SM2 5AS

BIRMINGHAM
Advertisement Executive
David Harvett 021-356 4838
Lynton house, Walsall Road,
Birmingham BH2 1BA

MANCHESTER
Advertisement Executive
Geoffrey Aikin 061-872 8861
Grove House, Skerton Road,
Old Trafford, Manchester M16 0WL

NEW YORK
US Advertisement Sales Manager
J Allan Feinman (212) 867 2080
205 East 42nd Street, New York,
New York 10017, USA

IBM PC books

Jack Schofield makes his selection.

ALL THE IBM PC BOOKS received so far are American, not surprising since in America the machine has a larger share of the market than in the U.K. Systems stretch from 16K cassette-based models used as home computers, to 544K models with hard discs used in major corporations. The range of IBM PC books, not surprisingly, matches the range of PC applications.

At the beginners' level there are already a number of books which aim to teach simple Basic programming. Probably the best of these is David A Lien's *Learning IBM Basic for the Personal Computer*. This features the PC in its Charlie Chaplin disguise, and is illustrated with cartoons.

David Lien is the serious, highly respected author of the invaluable *The Basic Handbook*, published by Compusoft. However, his IBM book wallows in the worst excesses of the down-home American style. You do not so much read the book as sit grimacing while it talks off the page at you. Awwk!, Shew!, Wow! and Oooops! are typical of its interjections. Many sentences are somewhat lacking from a grammatical point of view and not all the jokey analogies strike home.

However, the book is sound from the computing point of view. It contains lots of short example programs and all the ones I tried actually worked. The book is, therefore, probably a good choice if you can stand the style.

Hands-On Basic for the IBM Personal Computer by Herbert Peckham is a machine-specific version of a previous book, *Basic: A Hands-on Method*, with graphics and sound sections added. The style is much more serious than in Lien's book. It is textbooky, perhaps because Peckham used to be a professor at Gavilan College. Each chapter has about seven sections: objectives, discovery exercises, discussion, program examples, problems, practice test. It could be used in a classroom or for self study, but it is not as informative, as readable, or as easy to dip into as Lien's volume.

Basic for Business for the IBM Personal Computer is also organised like a text-book, complete with ruled blank pages for you to write answers to set exercises. It is not a particularly entertaining book, but Alan Parker has managed to write in a straightforward way with as little jargon as possible. It should therefore be accessible to the average small businessman. The main topics covered are calculation, data entry and file keeping, though there is also a chapter on using VisiCalc.

The illustrations include a lot of flow-charts and sample runs of programs. Many of the programs included are quite long but excessively well documented, and do fairly useful things like sorting or writing receipts. Naturally all the examples and analogies are businesslike. While the thought of businessmen running their companies on home-written Basic software fills me with horror, at least working through the book would give them some idea of how to evaluate packaged software.

IBM Data Files: A Basic Tutorial is like *Basic for Business*, only more so. The question-and-answer bits are no more than quick quizzes — no bad thing — and the text is even easier to follow. It contains a lot of sensible hints and tips that obviously come from experience because they only occur to people who have tried to explain computing to half-wits.

On the other hand, as well as illustrative examples the book also contains some very long useful programs. A Home Inventory System, for example, comprises 18 pages of listings and the author shows how it could be converted into a back-order system for small business use. The programs are modular, logical and well documented; they look as though they should work. So although *IBM Data Files* sounds more limited than other works, it is as educational and probably more useful than its rivals.

IBM Basic for Business and Home starts right at rock bottom with, "What is a Computer?, What is ROM?" and similar questions. The answers are very short so the book moves at a fast pace. The main part of the book is a guide to Basic keywords, which provides shorter and simpler accounts than are found in IBM's own manuals. The last part of the book deals with practical programming and then there are some very useful appendices — lists of commands and such like.

What the total package provides is a sort of potted version of the manuals, so the beginner can actually start computing more or less straight away. The book is unlike others reviewed earlier in that the author assumes the use of a proper PC set-up, including disc drives and a printer. He appreciates that most of the time users will be running packaged software. It is a sensible and useful book, which IBM ought to pack with its machines; it would certainly save their dealers more than its cost in time.

For people who just want Basic programs to type in there are two volumes on offer. *Some Common Basic Programs for the IBM Personal Computer* is the familiar Osborne/McGraw-Hill book. It is available in other editions for other micros including Pet, Atari, TRS-80 and the Apple II. There are 76 programs in all, which fall into four main categories: finance, maths, statistics and utilities. Examples include the usual interest-rate calculations, angle conversion, binomial distribution and sorting.

However, having reviewed the Atari version of this book in *Practical Computing* a few months ago I have two

(continued on next page)

(continued from previous page)

comments to make. The conversion of the programs to the specific machines shows the minimum of effort. Things like function keys, error trapping, graphics and sound are ignored. Also, before you buy the book think about whether you really need the programs.

The second book of programs, *Useful Basic Programs for the IBM PC*, is about half as big. It contains 65 programs organised into seven chapters and three appendices, and covers the usual topics such as maths, home finance and data analysis. Most of the programs are only about 20 lines, half a page, long and again, unless you are an absolute beginner, you could probably write them just as easily yourself.

There are a number of books which deal with operating the IBM PC in general without being tied to Basic, though of course Basic programming is a major feature of most of them. *IBM Personal Computer: An Introduction to Programming and Applications* is aimed at novices, and about 80 percent of the content is about Basic. In most of the book, however, the focus of attention is not on the language itself but on applications, such as, filing, graphics, word processing, games and science.

One version of the book comes packed in a box with a disc containing all the programs. As you might expect in a beginners' book, however, the level is pretty trivial. Overall the book seems adequate, though it is hard to enthuse over it. Perhaps I was just put off by the *Popular Computing* review quoted in large red letters across the cover: " ... you should definitely buy [this] book ... ". It would not be my first choice.

Using Your IBM Personal Computer is Lon Poole's effort. He has been involved in the production of books for other machines including the *Apple II User's Guide* and *Your Atari Computer*, which is much the best Atari book available. His IBM PC effort is similar in approach, and also very good. If you had no other documentation at all you could probably learn the PC from this book. It deals with setting up the system, discs and disc copying and even batch processing in part one, since this is where the average PC user will start. It is only in part two it moves on to Basic programming.

Actually Poole takes some stuff for granted, but he is excellent on the things that are not intuitively obvious, such as numeric strings and formatting output, and things that are particular to the PC. He is also very good on sound and graphics and working the printer. The book has some useful appendices including a Basic summary, tables of screen characters and codes, and an unusually good index. It is a very useful book for someone who is new to the IBM PC, but not necessarily new to computing. It would be ideal for easing the transition from, say, a Vic-20.

T G Lewis's book *Using the IBM Personal Computer* is even less devoted to Basic. In fact, the Basic interpreter gets less space than using VisiCalc, and only slightly more than the Pascal compiler. Unlike Poole, however, Lewis does not assume a familiarity with computing. The first chapter is "What can computers do?" He deals with the subject briefly but intelligently. All through the book Lewis manages to produce the best kind of technical writing: he is specific without being verbose, readable without being patronising.

Of course he is not without idiosyncrasies. No-one christened Theodore Gyle, who dedicates a computer book "To life in the Oregon hills", can be completely normal. However, he is writing for people with disc-based systems who want to do serious things and run packaged software, and he never loses sight of this.

However, the discussions of VisiCalc and Easywriter are very good, unless you happen to have bought Multiplan and Wordplus-PC, or whatever. Also, although the book is illustrated with screen photos these are very badly taken, and the cover picture, supplied by IBM, is awful.

If you really do have VisiCalc, then perhaps you want *The VisiCalc Book for the IBM Personal Computer*, by Donald Bell. It condenses a mass of instruction into around 340 pages. As far as I can see VisiCalc does not much care what it runs on, it always works in the same way. So while this may be a useful book it is hard to see the addition of the IBM name as much more than a marketing ploy. I have found the VisiCalc manual provides more information than I actually need, though people who want to push the program to its limits will be glad of the extra help.

IBM's Personal Computer is completely different, and I found it valuable. It is the book to buy before you buy an IBM PC, because it provides all the technical information you need. It shows how the PC fits into IBM's product range and how it fits into the micro market. It provides a full specification of the system with illustrations, plus good descriptions of the systems software and communications protocols. It also methodically evaluates some of the software: VisiCalc, Easywriter and the Peachtree series, plus a few small programs including games.

The resulting volume would be useful to an established data processing department thinking of adding PCs, or to a business user who is about to acquire one. Because it deals with warranties and sales outlets the book's American origins are sometimes a limitation, but otherwise this is a very handy book to have around.

The Executive's Guide to the IBM Personal Computer is clearly no ordinary book. The title is majestic. This ring-bound manual comes in a slip case like a software package with two floppy discs in a holder at the back.

But as I started to flick through it, I had an overwhelming feeling of *déjà vû*. Had I just seen too many IBM PC books? No, I really had read it before. It seems to be page-for-page exactly the same as *Basic for Business*, reviewed here, except that the discs and package inflate the price from £12.70 to £33.95.

Basic for Business for the IBM PC by Alan J Parker. Published by Reston Publishing, Prentice/Hall International, £12.70. ISBN 0 8359 0355 9.

Hands-On Basic for the IBM Personal Computer by Herbert Peckham. Published by McGraw-Hill, £16.50. ISBN 0 07 049178 X.

IBM Basic for Business and Home by Robert Funkhouser. Published by Reston Publishing, Prentice/Hall International, £12.70. ISBN 0 8359 3018 1.

IBM Data Files: A Basic Tutorial by David Miller. Published by Reston Publishing, Prentice/Hall International, £12.75. ISBN 0 8359 3026 2.

IBM Personal Computer: An introduction to Programming and Applications by Larry Joel and Martin Goldstein. Published by Robert J Brady, Prentice/Hall International, £13.35 or £27.95 including disc. ISBN 0 89303 111 9.

IBM's Personal Computer by DeVoney and Summe. Published by Que Corporation, distributed in the U.K. by The Computer Bookshop, £10.45. ISBN 0 88022 100 3.

Learning IBM Basic for the Personal Computer by David A Lien. Published by Compusoft Publishing, 1050-E Pioneer Way, El Cajon, California CA92020, $19.95. ISBN 0 932760 13 9.

Some Common Basic Programs: IBM Personal Computer Edition by Poole, Borchers and Burke. Published by Osborne/McGraw-Hill, £12.50. ISBN 0 931988 83 7.

The Executive's Guide to the IBM Personal Computer by Alan J Parker. Published by Reston Publishing, Prentice/Hall International, £33.95. ISBN 0 8359 1809 2.

The VisiCalc Book for the IBM Personal Computer by Donald H. Beil. Published by Reston Publishing, Prentice/Hall International, £13.60. ISBN 0 8359 8395 1.

Useful Basic Programs for the IBM PC by Stanley R Trost. Published by Sybex Inc. £7.95. ISBN 0 89588 111 X.

Using the IBM Personal Computer by T G Lewis. Published by Reston Publishing, Prentice/Hall International, £11.95. ISBN 0 8359 8138 X.

Using Your IBM Personal Computer by Lon Poole. Published by Howard W Sams, Prentice/Hall International, £14.40. ISBN 0 672 22000 8

>NEXT MONTH

>NETWORKS & COMMUNICATIONS

The special section in the November issue deals with the important topic of networking and communications. Features range from the basics of local area networks to program exchange via the public switched telephone network.

>REVIEWS

We will be reviewing the latest micro to be launched — but what will it be? The possibilities include new home, portable and business micros.

>HOME MICROS UPDATE

With the Christmas selling-season almost upon us we will be looking at the state of the home-micro market to see what is available. Anyone who may be getting or giving a small micro is advised not to miss this feature.

>AND MUCH MORE!

Fascinating features in the November issue include a selection of one-line Apple programs — a real challenge to human ingenuity — and a useful listing of *FX calls for the BBC Micro. Plus latest news, fiction and book reviews, and pages and pages of free software in a redesigned more legible Open File.

Make sure you don't miss the November issue of

Practical Computing

On sale at W H Smith and all leading newsagents after October 19

There's no room for a comedy of errors when it comes to choosing the right accounting program.

The wrong decision will produce a very sad clown indeed.

You can, if you really wish, pay £1,000 or more for a sprawling, highly complicated, 4–7 disk monster, with a manual you can't lift without a course of weight training, or understand without a brain transplant. Alternatively, for just £375, you can discover the unique simplicity of SAGE.

SAGE produces the only accounting program which is truly integrated and uses only one program and one data diskette.

● Sales and Purchase Ledgers, ● Nominal Ledger, ● Cash Book, ● Journal Entries, ● Trial Balance, ● VAT Return, ● Monthly and Annual Accounts, ● Age Analyses, ● Statements and Audit Trail – every accounting function you need in one compact and comprehensive package. The SAGE program is also widely used for Incomplete Records Accounting (without requiring modification). It can therefore be used by practising accountants for both functions. Its efficiency is built on simplicity–and its simplicity accounts for the price.

The SAGE accounting program is easy-to-learn and easy-to-use, with a short, clear and simple manual.

It's fully automatic – which means no shuffling through the program to find the section you need.

It's complete and self-contained – no expensive modules to buy every time you need an extra function.

It's suitable for use on CP/M or MS–DOS machines and has so far been implemented on Osborne, Superbrain, Epson QX–10, Sirius, Victor 9000, IBM PC, BBC/Torch Z80 and ITT with others in the pipeline.

What's more, the SAGE accounting program has been successfully tested in hundreds of installations and is the only system of its type – is as effective in a one-man business as in a multi million pound corporation.

Check it out and we'll turn the smile the right way up.

Return the coupon and we will send you more information and the name of your nearest dealer.

SAGE

accounting program

☐ Please send me your 8 page explanatory brochure.

☐ Please arrange for me to have a demonstration.

*I do not yet own a computer/have a _____ computer. *Delete as appropriate

Name _____

Position _____

Company _____

Address _____

_____

_____

Tel: _____

British Software for British Business

SAGE SYSTEMS LTD., Hawick Crescent Industrial Estate, Newcastle upon Tyne, NE6 1AS.
Tel: 0632 761669 Telex: 53623 SAGESL G.

PC1

Our innovation accounts for our price!

● Circle No. 250

THE BYTE SHOPS. MACRO VALUE IN MICROCOMPUTERS THIS AUTUMN.

BBC MICROCOMPUTER

PRICES EXCL. VAT

ACORNSOFT IN STOCK
BBC Micro Model B 364.00
Microvitec 14" Colour Monitor inc. Cables 249.00
12" Monochrome Monitor 115.00
Single Disk Drive 100K 199.00
Dual Disk Drive 200K 369.00
Dual d/s Disk Drives 800K 619.00
Torch Z80 Disk Pack Inc. CP/M Compatible Op. System 96K RAM 780.00
Disk Interface 95.00
Disk Cable 15.00
Format Disk and Doc 15.00
Epson RX/80 ..... 298.00
BBC to Epson Cable 24.00
Games Paddles 11.30
Selection of business, educational, graphics and games software available from 3.50
Selection of teach yourself BBC publications

PRINTERS—IMPACT

NEW LOW ANADEX PRICES

Anadex DP9500A 150CPS Matrix Printer with Graphics, Low Noise 995.00
Anadex DP9501A As DP9500A with High Density Graphics 995.00
Anadex DP9620A 200CPS Matrix Printer, Low Noise 100 COS in Enhanced Mode 1100.00
Anadex DP9625A As 9620A. Double Pass Correspondence Quality Mode at 50 CPS 1190.00
Anadex WP6000 Dual Mode Printer 150/180 CPS Correspondence Quality, 200/330CPS Draft and Graphics Mode. Diablo 630 Protocol Emulation 1995.00
Epson MX100FT/3 Friction and Tractor 100CPS 499.00
Epson FX/80 160CPS 438.00
Epson RX/80 New Model 289.00

PRICES EXCL. VAT

PRINTERS—DAISY WHEEL

Brother HR1 ..... 650.00
Diablo 620RO 25CPS 750.00
Diablo 630RO 1995.00
Smith Corona TP1 ..... 475.00

OSBORNE

Osborne Portable Computer Buy the world's best selling portable business computer from any Byteshop and we'll offer you a massive discount for payment by cash off our normal price. The Osborne 1 is the personal small computer system that is housed in a durable but lightweight 'snap together' case. Features include 64K RAM, dual double density floppy disk drives and full 80 col. screen. The price also includes Standard Software – Wordstar Mailmerge, Supercalc, MBASIC, CBASIC, CP/M: Double Density/80 Column Version **1095.00**

Upgrades for Previous Models
Double Density Upgrade inc. Fitting 175.00
Screen Pack 80 Column Upgrade 225.00
Screen Pack and Double Density Upgrade inc. Fitting 350.00
Osborne to Epson Cable 24.00
NEW* **Osborne Executive** with 128K RAM, 7" amber display, plus new software . 1995.00

BOOKS
Very wide range of computer books stocked at all shops.

PRICES EXCL. VAT

COMART COMMUNICATOR

Clearly the most price competitive modular computer system on the market with built-in expandability – inside and out.
inc. CP/M **From 1895.00 ex. VAT**



COMART COMMUNICATOR Z80A MODULAR SYSTEMS

Comart CP100 'Communicator' Micro Computer Z80A Processor, 64K Byte Memory, Dual 5¼" Floppy Diskette Drives each storing 390K Bytes of Data. Dual Serial and Parallel Ports. 10 Slot S100 Bus. CP/M Version 2 included 1895.00
Comart CP200 as CP100 except Dual 790K Byte Diskette Drives 2195.00
Comart CP500 as CP100 except one 790K Byte Diskette Drive and one 5" Winchester Drive having 4.8M Bytes of Formatted Data 2995.00
Comart CP520 as CP100 except one 790K Byte Diskette Drive and one 5" Winchester Drive having 19M Bytes of Formatted Data 3995.00

COMART COMMUNICATOR 8086 MODULAR SYSTEMS

Comart CP1202 Communicator Micro Computer 6MHz 8086 Processor, 256K Byte Memory with Parity, Dual 5¼" Floppy Disk Drives each storing 790K Bytes. Dual Serial and Parallel Printer Ports 10 Slot S100 Bus inc. CP/M86 ..... 2745.00
Comart CP1502 As CP1202 except 1 × 790K Byte Diskette Drive and 1 × 5" Winchester Disk having 5M Bytes of Formatted Data with 256K Byte Memory 3545.00
Comart CP1522 As CP1202 except 1 × 790K Byte Diskette Drive and 1 × 5" Winchester Disk having 19M Bytes of Formatted Data with 256K Byte Memory 4545.00

COMART CP 520MP MULTI-PROCESSING—MULTI-USER SYSTEM PACKAGE

The CP520MP is the new top specification multi-user/multi processing introduction to the renowned, expandable Comart Communicator series. This true multi-processing system allows one Communicator to be shared by up to five users, each having their own dedicated Z80A Processor and 64K Bytes of memory with no problems of system or processor degradation. Each individual work station can run CP/M Software in a true multi-user environment. £6995 ex VAT

COMART MULTI USER CONFIGURATIONS

CP520 MP Multi Processing Communicator System c/w 1 × Z80A main and 5 × Z80A slaves. 64K Byte main memory + 5 × 64K Bytes, 1 × 790K Byte Diskette Drive + 1 × 5" 20 Mega Byte Winchester Disk Drive, 12 Serial & 6 Parallel Interfaces. Inc. CP/M & Multi processing system software ..... £6995.
Comart CP520/M CP520 Communicator System with 256K Byte Memory and 6 Serial Interfaces Includes CP/M and MP/M11 ..... 4995.00
Comart CP 1525/M CP1520 Communicator with a total of 512K Byte Memory and 10 Serial Interfaces Includes CP/M86 and MP/M86 ..... 5995.00

IBM PERSONAL COMPUTER

IBM PC Dual 320K Byte Disk Drives 64K Byte RAM UK Keyboard and Screen 2477.00
IBM PC Dual 320K Byte Disk Drives 128K Byte RAM UK Keyboard and Screen 2820.00
IBM PC XT 1 x 320 KB Floppy Disk plus 1 x 10 MB Hard Disk, 128 KB RAM, ASYNCH COMMS, DOS 2.0, UK keyboard and screen 4440.00
IBM Colour Adapter Card 216.00
IBM Printer inc. Stand and Cable 509.00
MICROVITEC Colour Monitor High Res 550.00
KAGA Colour Monitor Med Res 335.00
EPSON FX80 PRINTER inc. cable 478.00

SOFTWARE FOR THE IBM PC

123 Business Management Package 359.00
BSTAM Byrom Communications Package 130.00
CBASIC Compiler (CB86) D/R Basic Language 387.00
CBASIC/86 Digital Research Language 129.00
CCP/M-86 Digital Research Concurrent CP/M Operating system 226.00
CP/M86 For IBM PC D/R Operating System 39.00
CARDBOX Caxton Database 155.00
DBASE II Ashton-Tate Database Package 437.00
EASYFILER IUS Database Package 258.00
EASYPLANNER IUS Financial Planning Package 161.00
EASYSPELLER II, IUS Word Processing Package 81.00
EASYWRITER II, IUS Word Processing Package 226.00
FLIGHT SIMULATOR Microsoft Training/Games Package 37.00
MAILMERGE Micro Pro Word Processing Enhancement 145.00
MARS Sapphire Business System 395.00
MICROSTAT Ecosoft Statistics Package 195.00
MULTIPLAN Financial Spread Sheet 183.00
PASCAL MT + 86 Digital Research Language 387.00
SPELLSTAR Micro Pro Word Processing Enhancement 145.00
SUPER CALC Sorcim Financial Planning Package 126.00
TIM III Database 399.00
VISICALC Financial Spread Sheet 168.00
WORDSTAR Micro Pro Word Processing Package 295.00
WS + MAILMERGE Micro Pro Word Processing Package 390.00
WS + SPELLSTAR Micro Pro Word Processing Package 415.00
WS + MM + SP/S Micro Pro Word Processing Package 510.00
See also CP/M86 software listing.

GAMES FOR IBM PC

Microsoft Adventure 27.00
Adventure in Serenia 29.00
Casino Games 29.00
Microsoft Decathlon 29.00

TECMAR PC MATE ADD ON'S AND ADD IN'S FOR THE IBM PC

TECMAR Winchester Share/10 Expansion 10M Byte, H/D with shared system adapter for up to 4 × IBM PC's inc. expansion unit 2295.00
TECMAR First Mate, Five in one card, 64K Byte dynamic memory card c/w serial and parallel ports, clock and calendar 320.00
TECMAR Dynamic Memory 64K Bytes . 230.00
TECMAR Dynamic Memory card 256K Bytes 390.00
TECMAR Scribe Tender with one serial and parallel cable 175.00
TECMAR High Res. Colour Graphics 520.00
TECMAR IEEE488 Interface 295.00
TECMAR DADIO Digital to Analog Converter 295.00
IRMA Board – 3278 Emulation 896.00

The above is just a small selection from the 60 plus Tecmar IBM PC compatible add in's and add on's and specialist interfaces that we offer. There are data storage expansion units; industrial, scientific and laboratory interfaces; extended input/output expansion cards; general support; communications and software utilities. Please contact us for a full listing. Our Microserve Centres in all our stores can offer full maintenance and service facilities for the IBM PC & Tecmar PC add on's.

BYTESHOP FOR THE PROFESSIONAL

There are so many micro computers on the market that choosing the right one is far from easy. And it isn't made any easier when you find them cheek by jowl with cameras, hi-fi and a host of other electrical equipment. What you need is someone that is single minded. And that means us. Byteshops are totally dedicated to microcomputers. So, not surprisingly, we can offer you a wider range because we sell nothing else. Our prices are keener too. So are our staff. Each one is an expert who can make sure you get the computer that's exactly right for you – whether it's a home micro or a £20,000 business system.

What's more we'll freely advise you on expanding or upgrading your system as your knowledge grows or your requirements change. While our Microserve Centres offer full service and maintenance on site and at our shops. And our product support specialists are your assurance of our total commitment to after sales service. After all, we are the UK's longest established microcomputer specialists. Come and see us soon.

Comart CP500 / M CP500 Communicator System with 256K Byte Memory & 6 Serial Interfaces inc. CP/M & MP/MII 3995.00

COMART SUBSYSTEMS

PRICES EXCL. VAT

Comart CB200 Cartridge Tape Back-Up Subsystem for Hard Disk 2495.00
Comart HD520 5" × 20M Byte Hard Disk Subsystem (requires HDCONT or can be added to a CP520 or CP 1520) 2395.00
Comart HDCONT Winchester Disk Controller for 2, 20M Byte Drives 195.00
Comart FD800 8" Floppy Single Disk Drive Subsystem; Single Sided, Single Density IBM 3740 Compatible (requires C-IFDC) ...995.00

UPGRADE SERVICE KITS

Wide range of factory fitted 8 to 16 Bit and floppy to hard disk upgrade kits available for communicator systems.

S100 BOARDS

Comart CRAM64 64K Byte Dynamic RAM with Bank Select 200.00
Comart CMPU Multi-Processing Add-In Card with Z80A Slave Processor, 64K Byte Dynamic RAM 2X Serial & 1X Parallel Interface ...495.00
Comart CRAM256 256K Byte Dynamic RAM with Parity, 8 and 16 Bit Data. IEEE696 Compatible. Also supports 8 Bit Bank Switching 550.00
Comart C-CPU86 8086 Processor Card, with Dual Serial and Parallel Ports. Monitor in 8K EPROM and 4K RAM 300.00
Comart C-IFDC Intelligent Diskette Drive Controller with Z80A Processor 295.00
Comart C-CPU Z80A system Processor Board incl. 2 Serial / 1 Parallel Port 200.00
Comart 4S 10 4 Channel Synch / Asynch Interface Board 250.00
Cromemco IOP I/O Processor Board with Z80A, EPROM, RAM and C-BUS 'Off Card' Interface 425.00
Cromemco QUADART 4 Channel ASYNCH / SYNCH Interface Board (Requires IOP) ..510.00
Cromemco Single Card Computer Z80A, SCC, EPROM, RAM, Serial & Parallel Ports ...425.00
CMEM32 32K CMOS Battery Supported Memory 550.00
RTC1 Real Time Clock Card / Prototype Board 150.00

CROMEMCO 68000/Z80A SUPER MICRO SYSTEMS

Cromemco CS 1D2 System 1 inc. Dual 390K 5" Floppy Disks, DPU, 256KZ and 16 FDC Cards in 8 Slot S100 Card, Table Top Enclosure 3730.00
Cromemco CS1 HD2E System 1 including Single 390K 5" Floppy Disk, 5.5M Byte 5" Winchester Disk, DPU, MCU, 256MSU, 16FDC, WD12 .....6345.00
Cromemco CS 1HD2 As System 1 except 256KZ Memory without MCU 5970.00
Cromemco CS 1HD5E as CS1 HD2E but with 512MSU 7090.00

CROMEMCO SOFTWARE FOR 68000/Z80A SERIES

Cromemco CRO-D Cromix Multi-User / Multi Tasking (Unix Based) Operating System 445.00
Cromemco FOR-D Fortran '77 .....445.00
Cromemco PAS-D ISO Pascal 445.00
Cromemco ASM-D 68000 Macro Assembler 445.00
Cromix (CRO-D). All Software is available on 5" or 8" Floppy Disks – Please specify. All 68000 Languages require Cromix.

PRICES EXCL. VAT

VDU'S & MONITORS

Comart WY100 Visual Display Terminal, Green Display, 24 × 80 and Status Lines. Detached 105 Key Keyboard with Numeric Pad, Function, Cursor and Editing Controls. Swivel and Tilt Display 725.00
Comart WYSEWORD Wordstar option ...30.00
Comart WY101 VDU with two Page Memory 775.00
Volkercraig 4404 .....595.00
Volkercraig 4404WS 695.00
12" Green Screen Monitor 99.00

DISKETTES

Byteshop 5¼" Single Sided, Single Density 1.70ea
Byteshop 5¼" Double Sided, Double Density 2.13ea
Dysan 5¼" Double Sided, Double Density 4.70ea
Dysan 8" Double Sided, Double Density 5.80ea
Full range of Dysan 5¼" & 8" Diskettes in stock

HOME COMPUTER SOFTWARE

Available for IBM PC, VIC, BBC, ZX81. Spectrum. Call for availability.

CP/M SOFTWARE

BASCOM Microsoft Basic Compiler 295.00
BASIC-80 Microsoft Basic Interpreter ..259.00
BAZIC Micromikes Basic Language 120.00
BSTAM BYROM Software Communications Package* 130.00
BSTMS BYROM Software Communications Package 130.00
C-86 D / R C Language with UNIX Version 7 Compatible Run Time Library .....TBA
CALCSTAR Micropro Financial Planning Electronic Spread Sheet Package 90.00
CARDBOX Caxton Store / Search System 155.00
CB80 Digital Research Basic Compiler 323.00
CB86 D / R Basic Compiler 387.00
CBASIC Digital Research Basic Language 97.00
CBASIC / 86 D / R Basic Language 210.00
CIS COBOL Microfocus COBOL Language* 425.00
COBOL-80 Microsoft COBOL Compiler .516.00
CP / M-86 DISPLWR Digital Research Operating System 210.00
DATASTAR Micropro Database Package 175.00
DBASE II Ashton-Tate Relational Database + ZIP* 437.00
FILESHARE (CIS) Microfocus Utility 250.00
FILESTAR Microsec's Disk Reformatter CP/M to IBM, DEC, Motorola and Intel Formats ..110.00
FORMS 2 Microfocus Table Maker* 110.00
FORTRAN-80 Microsoft FORTRAN Compiler 344.00
GBS Bytesoft General Business System 795.00
INFOSTAR Micropro Database Reporter 295.00
ISL Bytesoft Accounting Package 1095.00
LEVEL II COBOL Microfocus Language* 965.00
MACRO-80 Microsoft Macro Assembler 149.00
MAILMERGE Micropro Wordprocessing Enhancement to link with WORDSTAR* 145.00
MARS Sapphire Business System* 395.00
MICROSTAT Ecosoft Statistics Package 210.00
MILESTONE Organic Software Critical Path Package* 225.00
MULTIPLAN Microsoft Financial Planning Package 199.00
PASCAL / MT + D / R Pascal Language with Speed Programming Tool 323.00
PASCAL / MT + 86 Digital Research Pascal Language For 16 Bit Systems 387.00
PEACHTREE Basic Accounting System per module 325.00

The most significant microcomputer introduction for years and an established best seller. It's tremendous versatility means that it can be employed by for example, the small businessman as a stand alone desk top system, or the large corporate user as an intelligent terminal for a main frame. There's also the exciting new high performance high speed version the IBM PC XT. At the Byteshop, we can offer you the widest portfolio of IBM software and programmes plus add on's and add in's. This month's system offer is the IBM personal Computer with dual 320K byte diskette drives, 128K byte memory, UK keyboard and screen, PLUS DOS operating system and asynchronous interface card.

2820.00 ex VAT

PEACHTREE Business Management System per module 600.00
PERSONAL BASIC D / R language* 97.00
PERSONAL PEARL Pearl Data Base / FM* 190.00
PL / 1-80 Digital Research Language* ..355.00
PL / 1-86 Digital Research Language ...489.00
REPORTSTAR Micropro Reporter 210.00
RESCUE MBS Database 295.00
SPELLSTAR Micropro Proofreading Utility to link with WORDSTAR* 145.00
SUPERCALC Sorcim Financial Planning / Budgeting Spread Sheet Package* 126.00
SUPERSORT Micropro Sort Utility 145.00
SUPERVYZ Epic Application Control 97.00
T / MAKER II Lifeboat Associates Financial Planning / Spread Sheet Package 195.00
WORDSTAR Micropro Wordprocessing Package* Also available with Mailmerge and Spellstar 295.00
WP WORKSHOP MAC Ltd Training Guide for WORDSTAR or MAILMERGE 75.00
X BASIC Xitan Language 185.00
X BASIC 86 Xitan Language 250.00

Many Utilities, Programming Tools and Training Packages available. Also extensive range of diskette formats. Prices include configuration on machines supplied by ourselves. We are totally committed to after sales service and future support.
*These software packages are available for both CP / M and CP / M86.

ALL PRICES EXCLUSIVE OF VAT

- **Barclaycard Visa & Access cards taken in payment.**
- **Shop opening hours 9-5.30, check individual shops for details of Saturday opening times.**
- **Phone Mail Orders accepted. Please contact nearest shop for P.P. & Delivery Rates. Regret no C.O.D.**

- Some items may be subject to a dollar surcharge if the dollar exchange rate changes more than 5 cents. Prices will be adjusted in line with the rate prevailing at the time of purchase.
- Prices subject to change without notice E. & O.E. and are valid for the cover date life of this magazine (October 83)
- Whilst we carry a vast range of stock, we cannot guarantee that every advertised item will be available in each shop.
- All goods are new and include factory warranties.
- No refunds on opened software.
- Orders from Government Depts., Colleges & BFPO addresses welcome for orders above £25.
- Leasing & HP facilities available – apply for written details.
- Detailed prices available on request.

WHERE TO FIND US: LONDON

Closely situated to that conspicuous landmark the Thames TV Centre and within easy reach of both GT. Portland and Warren St. Stations, you can be assured of a high level of computer expertise and a warm welcome from Russell Jacques and his staff at the London Byteshop. Opening hours Mon-Sat 9-5.30.



BYTESHOP FOR THE BUSINESSMAN

You wouldn't go to a lawyer for medical advice, or take your tax problems to a doctor. It's just as illogical to talk computers to anyone but a computer expert.

Every Byteshop is a specialist computer store. In it you will find nothing but computers and computer people. There is nothing else to distract you. Every Byteshop can show you the very latest personal computer systems and provide solutions to both specific and specialist requirements. Word processing, production control, accounts financial planning and data bases are just a few of the most popular applications.

We can also offer everything allied to micro-computers, such as stationery, diskettes, boards, ribbons for your printer, books, tapes and print wheels.

Just as important, you will have the undivided attention of a computer expert. Our staff have been trained on all our machines and peripherals and can give you sound advice and assistance with complete impartiality.

Even if you have to travel a few extra miles it will certainly pay to come to the experts.

THE BYTE SHOP

Your Specialist Computer Centre

LONDON
The Byteshop,
324 Euston Road NW1 3BG
Tel: 01-387 0505

BIRMINGHAM
The Byteshop,
94-96 Hurst Street, B5 4TD.
Tel: 021-622 7149

GLASGOW
The Byteshop,
266 St. Vincent Street, G2 5RL.
Tel: 041-221 8202

MANCHESTER
The Byteshop, 11 Gateway House,
Piccadilly, Station Approach,
M1 2GH. Tel: 061-236 4737

NOTTINGHAM
The Byteshop,
92a Upper Parliament Street,
NG1 6LF. Tel: 0602 470576

SOUTHAMPTON
The Byteshop,
23 Cumberland Place, SO1 2BB.
Tel: 0703 334711

Members of the Comart Group of Companies

● Circle No. 248

DISKING

You've tried the Rest Now try the Best

FREE with EVERY TEN-PACK of diskettes from DISKING at these prices.

The complete DISKING DATA PROCESSING package

1 - SEE 10 LIBRARY BOX

Value £2.50

The NEW DISKING 'SEE 10' Plastic Library Box, with the facility for seeing ALL TEN DISKS, without the usual problem of bending the front disks forward. We've spent the last two years designing the BEST library box around, you will not find anything better. Unfortunately the 'SEE 10' is only available in the 5¼" size, whereas the 8" is the ordinary egly box.

★ ★ PLUS ★ ★

we supply the 'soft touch' DISKING Diskwriter. This pen is perfect for labelling diskettes, as it will not damage the delicate surface beneath the disk jacket. As an ordinary writing implement, it is superlative.
You may purchase these separately at a silly £9.90 for 50 (please specify blue or black ink).

★ ★ PLUS ★ ★

3 - DISK DIRECTORY

Value 99p

The 20 page PVC bound DISKING Disk Directory, offering two pages per diskette for keeping 'Track' of what's on each diskette. Also inside this directory, you will find a self adhesive index label for the spine of your Library Box.
You may purchase these separately at £9.90 for ten.

DISKING SUPER PROMOTION

With every TWO ten Packs of any 5¼" or 8" disks by Maxell, Datalife, Memorex or Dysan purchased at these prices we will pack a FREE Cheque Book Cover.
Order FOUR Ten Packs and you will receive two Cheque Book covers and so on. **This offer ends 31st December 1983.**

All free gifts offered at any time by DISKING are subject to availability. DISKING reserves the right to substitute any similar alternative item or withdraw the offer without notice.

DISKETTE PRICES EXC VAT

MEMOREX

MEMOREX - Memory Excellence

When it comes to PRICE/PERFORMANCE, MEMOREX wrote the book. Their new Japanese media is very conservatively rated, and certification levels are easily surpassed in actual performance. Protected by a special anti-static lubricant, head performance and media life is also extended.

5¼" DISKETTES

Certified for Single OR Double Density and all with hub ring reinforcement.

PRICES EXC VAT		10-40	50-90	100+
3481	S/Sided 48 tpi Soft Sect	20.90	19.90	18.90
3483	S/Sided 48 tpi 10 Hard Sect	20.90	19.90	18.90
3485	S/Sided 48 tpi 16 Hard Sect	20.90	19.90	18.90
3491	D/Sided 48 tpi Soft Sect	26.90	25.90	24.90
3493	D/Sided 48 tpi 10 Hard Sect	26.90	25.90	24.90
3495	D/Sided 48 tpi 16 Hard Sect	26.90	25.90	24.90
3504	S/Sided 96 tpi Soft Sect	27.90	26.90	25.90
3505	S/Sided 96 tpi 10 Hard Sect	27.90	26.90	25.90
3506	S/Sided 96 tpi 16 Hard Sect	27.90	26.90	25.90
3501	D/Sided 96 tpi Soft Sect	34.90	33.90	32.90
3502	D/Sided 96 tpi 10 Hard Sect	34.90	33.90	32.90
3503	D/Sided 96 tpi 16 Hard Sect	34.90	33.90	32.90

48 tpi suitable for 35 and 40 track operation
96 tpi suitable for 77 or 80 track operation

8" DISKETTES

PRICES EXC VAT		10-40	50-90	100+
3064	S/Sided S/Dens. Soft Sect	23.90	22.90	21.90
3015	S/Sided S/Dens. 32 Hard Sect	23.90	22.90	21.90
3090	S/Sided D/Dens. Soft Sect	26.90	25.90	24.90
3091	S/Sided D/Dens. 32 Hard Sect	26.90	25.90	24.90
3102	D/Sided D/Dens. Soft Sect	32.90	31.90	30.90
3105	D/Sided D/Dens. 32 Hard Sect	32.90	31.90	30.90

Datalife

DATALIFE by Verbatim - With Five Year Warranty

VERBATIM have not become the World's favourite floppy disks by accident. Perfect magnetic media is their stock in trade, and to prove it they now offer an unconditional FIVE YEAR warranty on all DATALIFE products.

5¼" DISKETTES

Certified for Single OR Double Density, and all with hub ring reinforcement.

PRICES EXC VAT		10-40	50-90	100+
MD525-01	S/S 48 tpi Soft Sect	22.90	21.90	20.90
MD525-10	S/S 48 tpi 10 Hard Sect	22.90	21.90	20.90
MD525-16	S/S 48 tpi 16 Hard Sect	22.90	21.90	20.90
MD550-01	D/S 48 tpi Soft Sect	29.90	28.90	27.90
MD550-10	D/S 48 tpi 10 Hard Sect	29.90	28.90	27.90
MD550-16	D/S 48 tpi 16 Hard Sect	29.90	28.90	27.90
MD577-01	S/S 96 tpi Soft Sect	28.90	27.90	26.90
MD577-10	S/S 96 tpi 10 Hard Sect	28.90	27.90	26.90
MD577-16	S/S 96 tpi 16 Hard Sect	28.90	27.90	26.90
MD557-01	D/S 96 tpi Soft Sect	36.90	35.90	34.90
MD557-10	D/S 96 tpi 10 Hard Sect	36.90	35.90	34.90
MD557-16	D/S 96 tpi 16 Hard Sect	36.90	35.90	34.90

48 tpi suitable for 35 or 40 track operation
96 tpi suitable for 77 or 80 track operation

8" DISKETTES

PRICES EXC VAT		10-40	50-90	100+
FD34-9000*	S/S S/Dens. Soft Sect	31.90	30.90	29.90
FD32-9000*	S/S S/Dens. 32 Hard Sect	31.90	30.90	29.90
FD34-8000	S/S D/Dens. Soft Sect	31.90	30.90	29.90
FD32-8000	S/S D/Dens. 32 Hard Sect	31.90	30.90	29.90
DD34-4001	D/S D/Dens. Soft Sect	36.90	35.90	34.90
DD32-4000	D/S D/Dens. 32 Hard Sect	36.90	35.90	34.90

*For critical applications

DISKETTE CARE AND MAILING

NEW LOW PRICES

DISK DRIVE HEAD CLEANING KITS

We're fed up with being asked whether our disk drive head cleaning kit actually works. So here's the proof:-

BEFORE.  AFTER

Can you really risk that breakdown?

CK5 for 5¼" disk drives	14.90
CK8 for 8" disk drives	14.90

The NEW DISKING 'SUPERMAILER' (5¼" only)



* COPYRIGHT DESIGN - Unlike the rest, this ingenious mailer has a flute crossing action when folded, resulting in a virtually unbendable mailer.

* CAVERNOUS CAPACITY - will take, one, two, three or even four diskettes WITH envelopes.

* FULL INSTRUCTIONS - Each DISKING 'SUPERMAILER' is printed with full instructions and comes complete with addressing/sealing label.

*PACKED IN 100'S - For convenience

1 PACK	2 PACKS	3+PACKS
24.90	22.90	19.90

DISKING - RESPOND

Nervous of mail order? Fed up with "allow 28 days for delivery"? Dubious of quality? Of course you are ,so what's new? DISKING STOCK AROUND 50,000 OF THE WORLD'S FINEST DISKETTES - That's what! Ask any of our 1000's of customers, we ship inside 4 WORKING HOURS! They've also discovered this in Norway, Sweden, Belgium, Germany, Malta, Greece, France, Israel, Bahrain, South Africa, Malawi etc.
Whether you want 1 or 100 Ten-Packs - We're waiting.
Call Joan or Roger on 0428 722563. ACCESS, VISA & DINERS cards welcome.

50,000 diskettes normally in stock
most orders shipped inside 4 hours.

DISKING INTERNATIONAL

FREEPOST, LIPHOOK, HANTS GU30 7BR, UK
TELEPHONE (0428) 722563
TELEX 858623 Telbur G or 858393 Telbur G

ALL PRICES PER TEN-PACK

maxell

MAXELL - The Gold Standard

Maxell consistently meet or exceed all standards, and have run disks under conditions designed to find weak points and wear. They couldn't and you won't. These diskettes are the quietest in operation we know.

5¼" DISKETTES

Certified for Single OR Double Density
48 tpi media with hub ring

PRICES EXC VAT		10-40	50-90	100+
MD1-D	S/Sided 48 tpi Soft Sect	24.90	23.90	22.90
MH1-10	S/Sided 48 tpi 10 Hard Sect	24.90	23.90	22.90
MH1-16	S/Sided 48 tpi 16 Hard Sect	24.90	23.90	22.90
MD2-D	D/Sided 48 tpi Soft Sect	32.90	31.90	30.90
MH2-10D	D/Sided 48 tpi 10 Hard Sect	32.90	31.90	30.90
MH2-16D	D/Sided 48 tpi 16 Hard Sect	32.90	31.90	30.90
MD1-DD	S/Sided 96 tpi Soft Sect	32.90	31.90	30.90
MD2-DD	D/Sided 96 tpi Soft Sect	42.90	41.90	40.90

8" DISKETTES

PRICES EXC VAT		10-40	50-90	100+
FD1-128	S/S S/Dens. Soft Sect	29.90	28.90	27.90
FH1-32	S/S S/Dens. 32 Hard Sect	29.90	28.90	27.90
FD1-XD	S/S D/Dens. Soft Sect	34.90	33.90	32.90
FH1-32D	S/S D/Dens. 32 Hard Sect	34.90	33.90	32.90
FD2-XD	D/S D/Dens. Soft Sect	39.90	38.90	37.90
FH2-32D	D/S D/Dens. 32 Hard Sect	39.90	38.90	37.90

Dysan CORPORATION

DYSAN - For The Decisive

When you think of disks you often think of DYSAN. DYSAN have the reputation for TOTAL dependability whatever the application. They may cost a little more but data is irreplaceable.

5¼" DISKETTES

Certified for Single OR Double Density, and all with hub ring reinforcement.

PRICES EXC VAT		10-40	50-90	100 +
104/1D	S/S 48 tpi Soft Sect	25.90	24.90	23.90
107/1D	S/S 48 tpi 10 Hard Sect	25.90	24.90	23.90
105/1D	S/S 48 tpi 16 Hard Sect	25.90	24.90	23.90
104/2D	D/S 48 tpi Soft Sect	37.90	36.90	35.90
107/2D	D/S 48 tpi 10 Hard Sect	37.90	36.90	35.90
105/2D	D/S 48 tpi 16 Hard Sect	37.90	36.90	35.90
204/1D	S/S 96 tpi Soft Sect	36.90	35.90	34.90
207/1D	S/S 96 tpi 10 Hard Sect	36.90	35.90	34.90
205/1D	S/S 96 tpi 16 Hard Sect	36.90	35.90	34.90
204/2D	D/S 96 tpi soft sect	46.90	45.90	44.90
207/2D	D/S 96 tpi 10 Hard Sect	46.90	45.90	44.90
205/2D	D/S 96 tpi 16 Hard Sect	46.90	45.90	44.90

48 tpi suitable for 35 or 40 track operation
96 tpi suitable for 77 or 80 track operation

8" DISKETTES

PRICES EXC VAT		10-40	50-90	100 +
3740/1	S/S S/Dens. Soft Sect	30.90	29.90	28.90
101/1	S/S S/Dens. 32 Hard Sect	30.90	29.90	28.90
3740/1D	S/S D/Dens. Soft Sect	37.90	36.90	35.90
101/1D	S/S D/Dens. 32 Hard Sect	37.90	36.90	35.90
3740/2D	D/S D/Dens. Soft Sect	41.90	40.90	39.90
101/2D	D/S D/Dens. 32 Hard Sect	41.90	40.90	39.90

UK SHIPPING RATES EXC VAT

5¼" DISKETTES
1-2 Packs each pack @ 95p
3-5 Packs each pack @ 75p
6-9 Packs each pack @ 60p
10+ Packs ★POST FREE★

8" DISKETTES
1-2 Packs each pack @ £1.60
3-5 Packs each pack @ £1.20
6-9 Packs each pack @ 90p
10+ Packs ★POST FREE★

5¼" CLEANING KITS
Same postal rate as packs of 5¼" diskettes. 10+ POST FREE

8" CLEANING KITS
Same postal rate as packs of 8" diskettes. 10+ POST FREE

5¼"NEW 'SEE 10' LIBRARY BOXES
SEE 10 1-4 off @ 40p
SEE 10 5-9 off @ 30p
SEE 10 10+ @ 20p

8" LIBRARY BOXES
LB8 1-4 off @ 60p
LB8 5-9 off @ 45p
LB8 10+ off @ 30p

DISKING SUPERLUXE DISK LIBRARY (5¼" ONLY)
Same postal rate as 5¼" diskettes. 10+ **POST FREE**

DISKING DISK DIRECTORIES
10-Pack 2.00

DISKING SUPERMAILERS (5¼" ONLY)
100-Pack Complete with sealing labels **3.00**

DISKING DISKWRITERS
50-Pack **£1.00**

LOCKABLE DISKETTE STORAGE
All versions £2.00 each for one, £1.30 each for 2-7, 8+ postfree.

NORMAL ORDERS - We now welcome any official Government orders
We are now happy to accept any official orders with a minimum value of £30.00 from Government Departments, Ministries and Local Authorities. We do this on the understanding that invoices will be settled within thirty days or preferably less please.
Alternately, you may send your remittance with your order if you so wish.
All other non Government bodies, cheques with order please payable to DISKING. If you are a large establishment, and cannot raise cheques without an invoice please post or telephone us your order, and we will send a pro-forma invoice by return, for your accounts department to pay against.
Also bear in mind, that you do have to pay VAT, which will be added to these prices.
If you are in any doubt, please see the order form on this brochure to help you with your calculations, or telephone us for assistance.

CREDIT CARD ORDERS
We welcome Access (Mastercharge), Barclaycard (VISA) & Diners Club International, & there is NO credit card surcharge. You may write your c/card No. on your order or telephone the order day or night, 365 days a year. You may speak for as long as you like, (but don't leave long gaps otherwise our machine thinks you've gone home) and don't forget to give the following details:
1. The Cardholders Name, Address and day time telephone number.
2. Delivery Address if different.
3. First Class, ordinary or special post.
4. Your Credit Card Number.
5. What you wish to Order.
6. State whether purchasing from our General price list or Budget price list.
You may leave the rest to US!!

URGENT ORDERS
If you're posting your order, omit the word FREEPOST from our address, and use our normal postcode GU30 7EJ and do not forget to stamp it FIRST CLASS. If you are a Government body as defined under 'NORMAL ORDERS' and are telephoning your official order OR are an individual or company using your credit card No., please make it clear that you wish to pay for your goods to be sent to you by FIRST CLASS POST.

FIRST CLASS RATES EXC VAT	MINIDISKS	8" DISKETTES
First TEN-PACK	2.00	2.50
Second and subsequent TEN-PACK	1.50	2.00

DESPERATE ORDERS U.K.
Your options are:- DATAPOST Which will deliver the goods within the United Kingdom overnight (usually before 10 am the next day) provided they are ordered and paid for from DISKING by 3.00 pm or EXPRESSPOST Which will deliver the goods the SAME DAY provided they are ordered and paid for from DISKING by 10.30 am, and provided you are no further north than Manchester.
These services put great stress on our sales order processing and packaging departments. Please therefore, spare a thought for our girls, and make sure that:
a) The required goods are in stock and
b) A full complement of manpower and vehicles are available at DISKING.

DISKETTE STORAGE



LOCKABLE DISKETTE STORAGE

These anti-static, ABS plastic diskette storage boxes come in four sizes, two for mini disks and two for 8" disks.
They have a white base with a transparent smoked lockable lid, and hold 40 or 80 diskettes.
They come complete with keys and dividers.

PRICES EXC VAT	
M35 40 minidisk capacity	14.90
M85 80 minidisk capacity	18.90
F40 40 8" diskette capacity	18.90
F90 80 8" diskette capacity	27.90

DISKING SUPERLUXE DISK LIBRARY (5¼" only)

The whole area of your disk, its labelling and its envelope are fully visible for INSTANT selection ANYTIME.

AVAILABLE IN TWO VERSIONS

PRICES EXC VAT	1-2	3-4	5-9	10+
SDL (For 20 minidisks)	9.95	8.95	7.95	6.95
SDLX (For 28 minidisks)	11.95	10.95	9.95	8.95
Uprating Conversion Kit	2.00			

LIBRARY BOXES

PRICES EXC VAT	1-49	50+
SEE 10 for minidisks only	2.50	2.20
	1-47	48 +
8" LIBRARY BOX (NOT SEE 10 Design)	2.50	2.20

The new SEE 10 is probably the best 5¼" library box around.

(FREE with every ten disks ordered)

TRADE CORNER

Write or call for our very latest Autumn '83 TRADE PACK.
KEENER prices than ever before, but QUALITY maintained.
Don't buy other peoples cheap disks, they are probably batch tested and they will probably let your customer down. We know - we get sob stories on the 'phone daily. Every diskette that DISKING sells is individually certified! - for yours and our PEACE OF MIND.
You may mix and match any of our quality diskettes so that your customers may select their favourite brands. This way you can be sure of pleasing everybody.
A FREE sample unlabelled diskette will also be enclosed, which are available in 100 bulk packs and at extremely keen prices just in case you should be selling software.
If you get any enquiries for pre-formatted diskettes, do not sweat because we can obtain most of them.
BLANK CASSETTES are also available complete with library cases in either C-12 or C-15 format at £39.00 per 100, U.K. P&P £4.00.

● Circle No. 189

QTY	PART NO.	DESCRIPTION	PRICE EXC VAT
			£
			£
			£

TOTAL GOODS VALUE EXC VAT £
TOTAL DELIVERY AND INSURANCE £
SUB TOTAL EXC VAT £
VAT £
VALUE OF CHEQUE PAYABLE TO DISKING £

Name: _____ Tel No: _____
Address: _____
Please charge my credit card No: _____

Hello Houston, we have a problem

Chris Naylor tells how to enhance cognitive appraisals with a knowledge update

THOSE OF US who are sufficiently grey-haired and decrepit to remember the heady days of space exploration may recall a particular conversation which took place on April 13th, 1970.

"Hey, we've got a problem here!"

"This is Houston. Say again, please."

"Houston, we've had a problem. We've had a main bus B interval."

"Roger. Main B interval. OK. Standby 13. We're looking at it."

"OK. Right now, Houston, the voltage is looking good . . . We had a pretty large bang associated with the caution and warning there. And, if I recall, main B had an amp spike on it once before."

"Roger, Fred."

The exchange took place between Apollo 13 en route to the moon and ground control in Houston and the question that then sprang to the mind of the listener was: What exactly, or even roughly, was it all about? The "problem" was, in fact, that Apollo 13 had just blown up. There is something about the American way of describing things that is singularly impenetrable and, of late, this Houston-ese has been creeping into the computer world at an alarming rate. The reason is simple: nobody has anything interesting to say about computers, but everyone wants to create the opposite impression.

Computers, unlike spacecraft, rarely go to the moon and rarely blow up. The things they do are relatively commonplace, and to state the truth of the situation tends to deprive the speaker of the glamour which he or she may feel to be their due.

The problem is most severe for newcomers to the game. They themselves cannot always see through the speech-opacity of the experienced computer-person and, worse, they have a limited capacity for generating opaque speech, which makes it difficult for them to join in the game. So here, by way of education, is a typically workaday example of how you should, really, explain computers.

We wrote a program. We thought it would work . . . .

"We have approached the problem with a real-world orientation and come to the following conclusions. That the problem, as a problem, possessed an implementable structure not limited to the realm of theoretically possible machines but including, also, realisable machines. That, of those realisable machines, at least one such machine had been realised in fact and that a mapping of the problem from the abstract domain into the domain of this realised machine was, in fact, feasible given the right approach. Further, we believed that such a mapping would produce a specific solution which would prove to be both time and space feasible in the new domain. With this in mind we moved at once towards an implementation-achieved type of goal in order to generate a suitable test pattern of theory against a reality-based solution."

. . . but the program was too big.

"At this stage in the process, run-time parameters revealed that the real-world implementation was, initially, alpha-complex to a degree that imposed constraints. By alpha-complex, if we may define a few terms, we mean that a minimal string representation of the problem with no time requirement for implementation was space-infeasible."

We tried to get it to work. . .

"The problem then became one of attempting for a minimax solution in which both the maximum alpha-complexity and the maximum beta-complexity were both simultaneously held to a minimum compatible with execution in the original problem domain. We were motivated in this by a belief that the problem in hand was, at least, semi-tractable."

. . . and it is too slow.

"Moving next to a space-minimal representation with no upper bound to the space requirements revealed a situation in which the implementation was beta-complex, again to an extent that imposed constraints of an unacceptable nature. By beta-complex, we naturally mean that a solution based on a minimal time requirement with an unbounded space requirement lead to a minimal string representation of the second type."

Unfortunately the manual is not clear . . .

"Using paperware look-up we attempted to get a better fix on the specific sub-problem domain by recourse to existing bodies of knowledge whereupon it appeared that the exact sub-problem was one of a class not covered within the general domain of paperware solutions."

. . . which is funny, because we wrote it.

"This produced some cause for internal consultation and investigation with respect to paperware origination in the hope of pre-empting further situations that might be classified as similar."

We could try a different problem . . .

"Alternatively, we could go for a minimax solution to both the problems of alpha complexity and beta complexity in which the representing string was also current hardware feasible thus allowing a shift in the initial problem domain into the area of that class of problems which have epistemologically adequate solution representations in current hardware terms."

. . . but this one has us beaten.

"Given the foregoing remarks, we are inclined to think that the problem may belong to a class of genuinely hard problems for which no epistemologically adequate solution exists which is both time-minimal and space-minimal due to the problem's alpha-complexity and beta-complexity. Further, should a heuristically adequate representation exist then we doubt that such a representation would genuinely map on to the problem domain in question in a sufficiently thoroughgoing fashion to permit of adequate reliability."

Our invoice will be with you in the morning.

"Related to the foregoing remarks we would note that a paperware solution does exist in relation to the sub-problem of perceived fiscal constraints inherent in a project of this sort and that this solution is both space and time feasible in relation to yourself. And that the sort of, approximate, timescale envisaged is little more than a standard reckoning of twenty-four hours. This particular aspect of the problem may seem semi-hard, but we assure you that it is, in every sense, tractable."

Discover the Microcomputer Age

Come along to The Northern Computer Fair and discover for yourself the excitement of the microcomputer age. All you need to know about personal computers, home computers and microcomputer systems for business will be on display at Belle Vue, Manchester from November 24-26. All your questions will be answered at the North's premier personal computer exhibition.

Enthusiasts can see the latest software and hardware technology in action, and for those new to the world of computers this show is a great introduction. Being sponsored by Practical Computing and Your Computer, the leading microcomputing magazines, you can be sure of value for money at £3 a ticket for Adults and £2 for Children under 16.

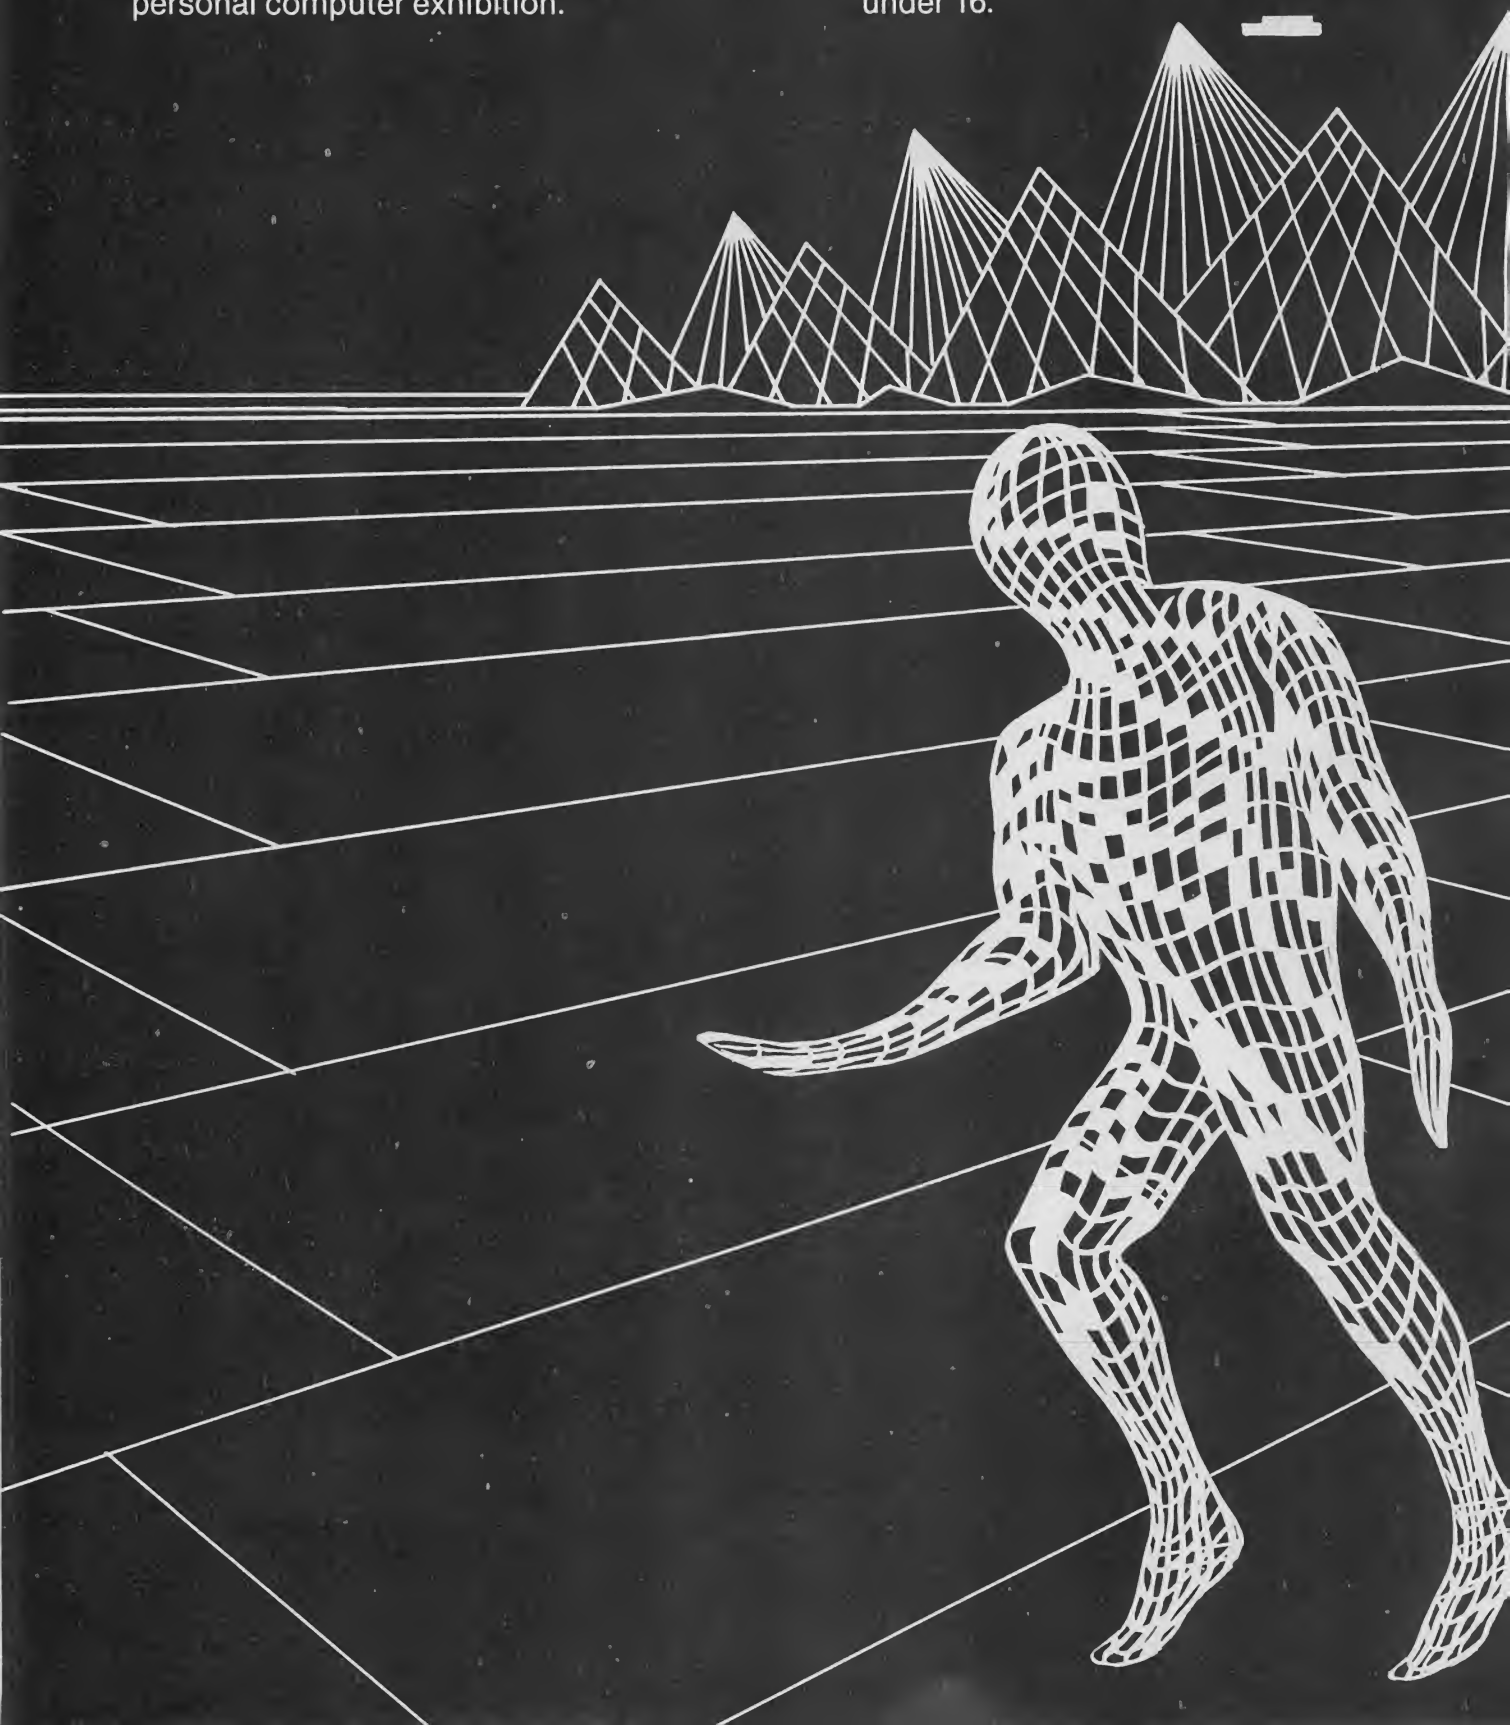

Travelling to the show is also easy as the organisers have arranged special reduced-price tickets with British Rail which include the cost of admission. For further information ring British Rail Enquiry Bureau on 061-832-8353 before November 11.

The Northern Computer Fair is open between 10.00 am and 6.00 pm every day so come along and bring the microcomputer age alive for you.

For special party rates and further information contact:
The Exhibition Manager, The Northern Computer Fair,
Reed Exhibitions, Surrey House,
1 Throwley Way, Sutton,
Surrey SM1 4QQ

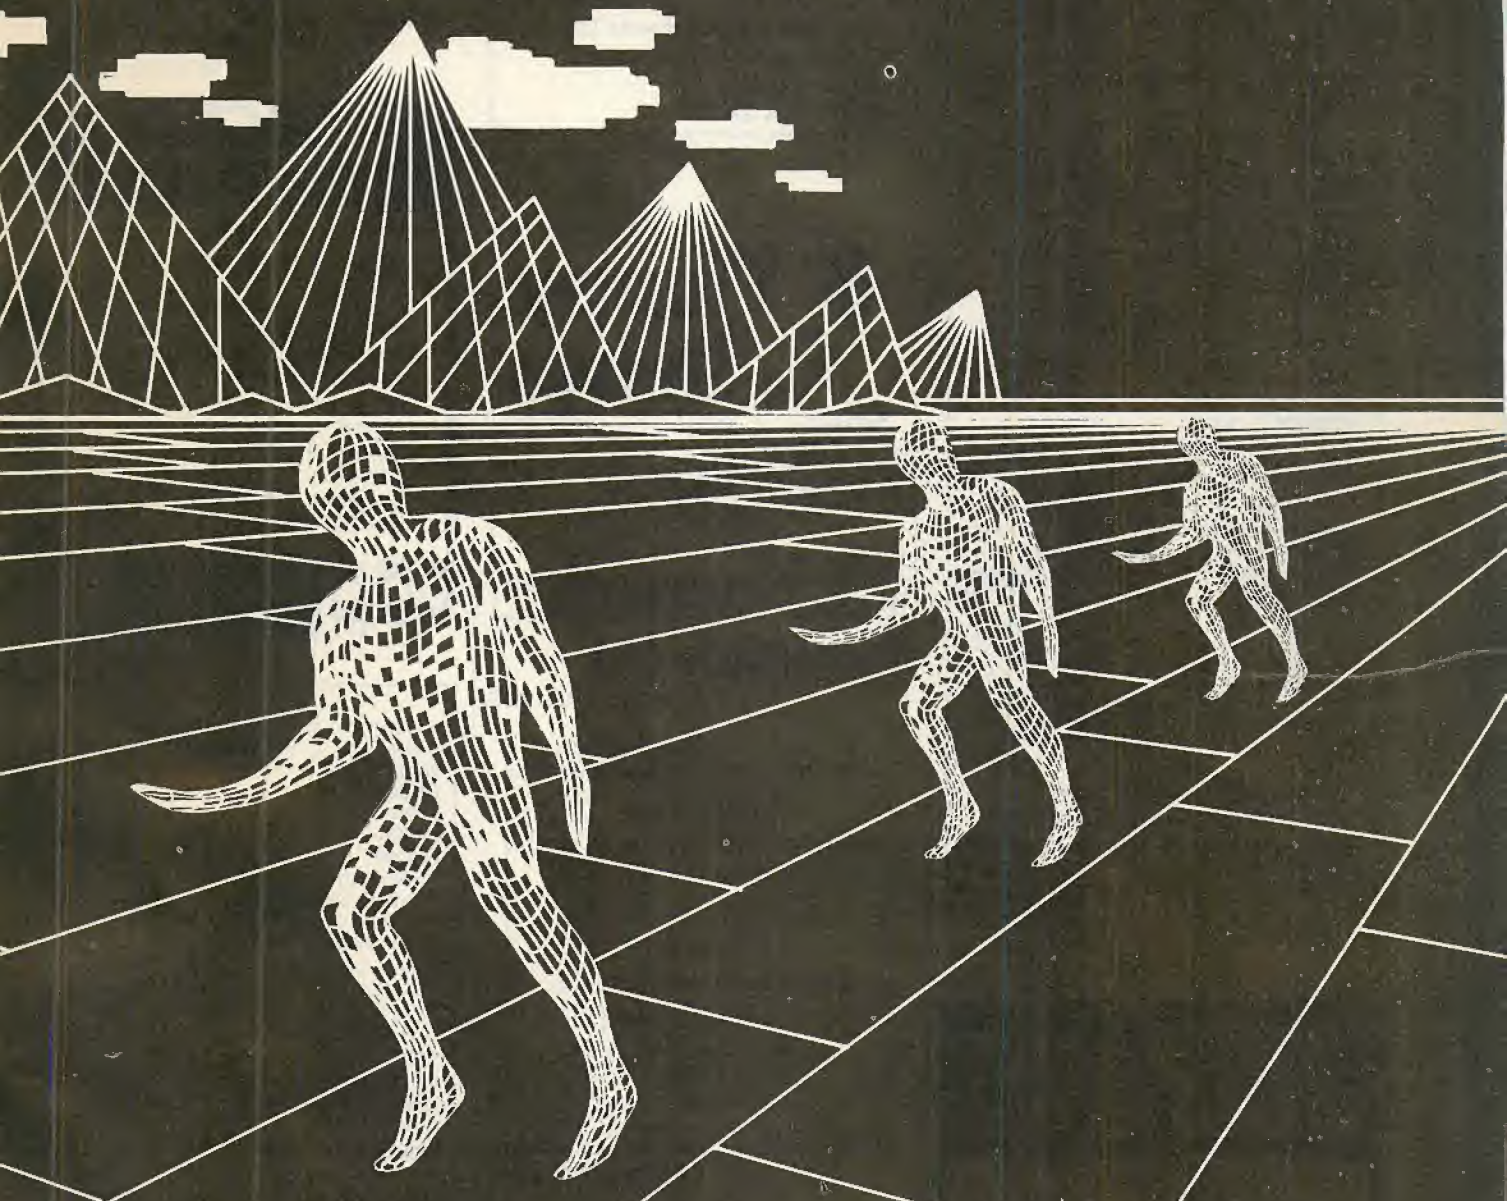

THE
Northern Computer Fair

Personal computers
Home computing
Small business systems

Sponsored by:

Practical Computing and YOUR COMPUTER

Belle Vue
Manchester
November
24-26, 1983

SHOPWINDOW

HAVE YOU CONSIDERED BAR CODES

Bar-codes give a speedy and error free means of data entry and provide a foolproof method of identification for any item or document. Typical uses include stock control, libraries, filing systems, security & checkpoint verification, point of sale terminals, spare parts identificaiton, etc. etc. Already most grocery products are bar-coded at source and many other areas of industry and commerce are following. Bar-codes will soon be commonplace.

APPLE 2 PET BBC micro

A complete low cost bar-code identification system is available for these micros. It contains all the hardware, software and documentation needed to read and print bar-codes (using an Epson dot matrix printer). Most bar-code formats may be read and the system may easily be patched into an existing applications program.

£199.00 + VAT

***** NEW *** RS232 bar-code reader**

This new stand-alone unit decodes the bar-code and converts it into ASCII for transmission to the host computer via a RS232 port. Complete with scanning wand, power supply & cables. Works with virtually any computer.

£385.00 + VAT

More information on these products is available on request. Please state your micro & area of interest. The decoder board is available separately to OEMs.

DOT MATRIX & DAISYWHEEL PRINTERS LOWEST PRICES GUARANTEED! FX80

EPSON FX80 RX80
NEC 8023 STAR
SHINWA CP80
BROTHER TEC
etc. etc. etc.



Our pricing policy is to match or better any other advertiser. In addition . . . enthusiastic and knowledgeable technical advice and backup is available to all our customers. Delivery is from stock to your door, often within 24 hours. Phone for a quote or write for full lists.

ALTEK (PC) 1 GREEN LANE WALTON ON THAMES SURREY
please phone before calling (0932) 244110

● Circle No. 256

TRS-80 VIDEO GENIE

NEWDOS-80
APL-80
PASCAL-80
FORTH (MMS)

Details of these and over 200 other programs are contained in our new loose leaf catalogue price £1.00 (refundable) from:-

MICROCOMPUTER APPLICATIONS
41 QUEEN'S ROAD
BLANDFORD FORUM
DORSET DT11 7LA
TEL: (0258) 55100

● Circle No. 257

Programming & Consultancy Service

We can help with . . .
Programming · system design · user manuals · technical training · hardware and software selection. We are at home on micros, minis and mainframes — in all major languages.

Mike Lewis Consultants Ltd
48 Willoughby Road
London NW3
tel: 01-794 3886

● Circle No. 258

8" Floppy Drives FOR SUPERBRAINS

MICROMODS LTD.
53 ACTON RD LONG EATON NOTTINGHAM
NG10 1FR TEL: 06076 64264

MicroMods Ltd.

● Circle No. 259

Typemate

An easy to use disc based word processor for the CBM 8032

£65 incl. VAT

MCTS

59, Ardwyn, Whitchurch,

Cardiff CF4 7HD

Software consultancy service
Software written to order
Specialists in maritime software
Write for details

● Circle No. 260

NEWBURY DATA PRINTERS

8510 from £480.00
1550 from £600.00
are, what other printers want to be

Continuous Stationary 1000 SHTS
11 × 9½ plain £5.25
11 × 9½ plain (zip margins) £6.00
11 × 14½ plain/lined £7.00
Min. Quantity = 1 Box (2,000 sheets)

Contact Chris Pearce
CDP Consultants Ltd.
Wicken Rd., Clavering, Essex CB11 4QT.
(079985 617)

● Circle No. 261

ZORBA

THE SERIOUS PERSONS PORTABLE
PLUS
LUCAS LOGIC LX80
The Low Cost 80cps Printer
(A great Parternship)
ADD
DBASEII
The Most Powerful Micro Database
(Now the system is complete)
And you can take it anywere
Deliveries are immediate

Contact Chris Pearce
CDP Consultants Ltds
Wicken Rd., Clavering, Essex. CB11 4QT
(0799 85) 617

● Circle No. 262

MICRO REPAIRS

We are an authorised service centre for Apple, Epson, Microwriter and most peripherals. Our friendly service staff provide a service which is both comprehensive and reliable. Call us now for repairs, preventative maintenance and contract quotes.

Spring clean and test only £25.00 + V.A.T. (Central London). Other areas please call for a quote.

tap 01-405 9129/9125

● Circle No. 263

dBASE II — by Ashton Tate is the top selling database package. But it from **AQUA** Computing Ltd, the **dBASE** specialists.

dBASE II	£375.00
DBPlus	£125.00
DBFLIST	£30.00
DBAccel	£50.00
dBASE II User' Guide	£22.00
Everyman's Database Primer	£12.00

Any one of the last 4 items is **FREE** if you buy your copy of **dBASE II** from **AQUA** by July 1.

DBPlus COMPRESEES/DECOMPRESSES **dBASE II** files to 30/40% of original size; SORTS any **dBASE II** file up to 15 times faster; MODIFIES structures easily — complete with manual. Pays for itself in a few weeks.

Are your files scattered over several disks? **DBFLIST** compiles a master catalogue of all your **dBASE** files. Can save you hours of searching for that 'Lost file'.

DBAccel converts **dBASE II.** CMD file(s) into a single level format for much faster execution; Overlay control can be selective. Program size is limited only by available memory. Reduces running times by up to 50%.

dBASE II User's Guide is one of the best manuals on **dBASE II;** Has sold over 17,000 copies in the US; Written by Arthur Green, a leading US expert on **dBASE** courses. In stock now.

dBASE II Beginner's Guide, published by Ashton Tate, is essential for every serious **dBASE II** user.

For software products (DBASE II, DBPlus, DBFLIST, and DBAccel) add VAT to prices. Specify machine and diskette format (SD/DD, 5.25" or 8"). No extras for packing or postage in UK; add £5.00 for overseas. Further details available on all products. Pay by Cheque, PO, Access or VISA. Send to:

AQUA COMPUTING LTD (Dept PC5), 10 Barley Mow Passage, London W4 4PH (Phone: 01-994 6477).

● Circle No. 264

SHOPWINDOW

Datalife
5 Year Warranty by Verbatim

Boxes of 10 Datalife MiniDisks at **£22.50** (plus £3.95 VAT and p+p).

*** SPECIAL OFFER FREE LOCKABLE STORAGE UNIT WITH EVERY 5 BOXES (50 Disks) £112.50 (Plus £19.75 VAT and p+p)**

To order, phone 01-661 2060 or send your cheque to: ERAC Consultants (Southern) Ltd., Grove House, 6 Grove Road, Sutton, Surrey SM1 1BQ. Please allow 7 days for delivery. Personal callers welcome.

● Circle No. 273

BRAIN SURGEON

Anita Electronic Services (London) Ltd are specialists in the repair and service of Superbrain I and II and associated printers including Apple silent type, Centronic, Anadex, NEC, QUME, Ricoh and Empson.

We also specialise in the repair of Commodore and Apple computers.

We offer a fast on-sight service or alternatively repairs can be carried out at our workshops should you wish to bring in your machine.

Maintenance contracts are available at very competitive prices. Trade enquiries welcome.

For further information telephone or write to:

MR D. WILKINSON
Anita Electronic Services Ltd.,
15 Clerkenwell Close,
London E.C.1.
01-253 2444

● Circle No. 274

ANNUAL MAINTENANCE CONTRACTS
10% of PURCHASE PRICE
(R.R.P.)

EXAMPLE PRICES:-

SUPERBRAIN £200
SIRIUS £200
APPLE+ DISK DRIVES £120

YOU WILL GET:-
24 hr Response
Nothing else to pay
Most Popular Micros + Peripherals

Contact now:-

S.S.W. ELECTRONICS

Unit 8, LODGE FORGE, TRADING ESTATE
CREADLEY RD, CRADLEY HEATH
WEST MIDLANDS. TEL. (0384) 635237

● Circle No. 275

TO HELP YOU
WIN THE POOLS

"POOLSDATA" — Results Database
Complete record of all English Football League results 1978-83. The teams, scores and actual date of over 10,000 matches, for your analysis. Simple format, with starter analysis programs and guidance notes.
Available for Dragon Spectrum, ZX81, BBC, Pet, VIC, Commodore 64
Tapes (2 years data) £7.50
Tapes (5 years data) £12.50
Discs (5 years data) £15.00

"POOLSWINNER" — Pools Predicter
Flexible, updatable prediction program which references an integral *10 year* database. Predicts draws, aways and homes. Can be tuned to your own unique formula, or used in simple mode.
Available for Apple (disc), Spectrum/ZX81 (Tapes)
Tapes/discs £15.00
Please send S.A.E. for details, or send cheques/P.O.'s to
SELEC SOFTWARE
37 COUNCILLOR LANE
CHEADLE, CHESHIRE
061-428-7425
ACCESS VISA

APPLE II + AND //e CARDS AT AMAZING PRICES!!!!

New to the **CIRTECH** range — **Intelligent Eprom Programmer**
Programming unit/status indicator is connected to the main control card by 2ft. ribbon cable, enabling easy operation outside the Apple.
Programs Intel compatible EROM's up to and including 27256's.
Intelligent programming mode for 2764, 27128 and 27256 EPROM's drastically reduces programming times (typical times; 2764 reduces from 450 to 70 secs., 27128 from 15 to 2 mins., and 27256 from 30 to 5 mins.)
All operating software is contained in the ROM in the programmer — no discs or tapes to load.

STANDARD 80 COLUMN CARD	–	Add 80 column text to the //e (upgradable to 16 or 64K)
16K 80 COLUMN CARD	–	80 column text and 560 × 192 graphics (upgradable to 64K)
64K 80 COLUMN CARD	–	Full 64K 80 column card
16K UPGRADE KIT	–	Increase the standard 80 column card to 16K
64K UPGRADE KIT	–	Increase the standard or 16K 80 column cards to 64K
Z80 CARD	–	Run CP/M based software on your Apple //e or II +
PARALLEL PRINTER INTERFACE CARD	–	Centronics type interface (echoes output to screen)

These quality British designed and manufactured cards use the lastest packing techniques to give high reliability, improved noise immunity and lower temperatures inside the Apple.

PRICES:

EPROM Programmer	£90.00	//e 16K Upgrade	£30.00
//e Standard 80 Column	£50.00	//e 64K Upgrade	£45.00
//e 16K 80 Column	£75.00	Printer Interface	£32.00
//e 64K 80 Column	£90.00	Z80	£45.00

Postage and packing £1.00 per card
Please add VAT @ 15% to the total
ORDERS/ENQUIRIES TO:
CIRTECH, P.O. Box 29, Dunfermline, Fife
Telephone (0383) 729770

● Circle No. 276

The T.S.S. Technology Shop is now open and able to provide an unparalleled service for all your computer requirements.

- **Hardware/both new and second user equipment, whatever yo need at remarkable prices.**
- **Supplies — completely comprehensive range at unbeatable prices.**
- **Service — on a national bisis with your satisfaction guaranteed.**
- **Complete used systems from £1,795. Used printers from £75. Used VDU's from £230.**

New CP/M Systems from £895. Let us be the solution to your problems. Call 01-431-3100 now!

● Circle No. 277

Insure your computer

Impact damage, fire, theft and transit cover for all your computer equipment.

£1 to £1500	Cover £8 p.a.	with	£10 excess
£1501 to £2500	Cover £16 p.a.	with	£15 excess
£2501 to £8000	Cover £16 p.a.	with	£25 excess
£8001 to £10000	Cover £20 p.a.	with	£25 excess

Write or telephone today for further details.

KGJ Insurance Brokers (Stourbridge) Limited
6 Hagley Road
Stourbridge
West Midlands DY8 1QK
Tel: Stourbridge (STD code 03843) 5333/2545/77391

● Circle No. 278

STOCK CLEARANCE *SALE*

Microsoft	BASIC	£175
	FORTRAN	£225
	COBOL	£330
	BASIC COMPILER	£202
Micropro	CALCSTAR	£105
	WORDSTAR	£210
	DATASTAR	£155
	MAILMERGE	£ 70
	SORCIM SUPERCALC	£135
	ORGANIC SOFTWARE	
	MILESTONE	£170

Ex. DEMO SUPERBRAINS II

"Junior"	£1406
Q.D.	£1744

All prices exclusive VAT & carriage
Microcomputer Club, PO Box 66, Croydon CR9 4QB
Telephone 01 681 1885

● Circle No. 279

Snail Software

MAILBAG (BASIC) **DRAGON 32K**
A versatile mailing program which amends, sorts, prints, merges & deletes up to 100 files which can be sorted and printed in any field. £10 inc.

DRAWER (COMPILED) **LVL II VIDEO GENIE 32K**
Draws grids, circles, arcs, graphics, paints, writes, edits and reverses. Your picture can be merged with another, moved around the screen and recorded. Easy recall to any program. Complete with manual. £25 inc.

ACCOUNTS (BASIC) LVL II VIDEO GENIE/TRS 80 48K
Ideal for small businesses or accountants producing finished accounts from incomplete records. Full nominal ledger, running totals of debtors, creditors, stock & capital assets. Weekly and quarterly cash, bank VAT & balance sheets. Comprehensive manual. £59 inc.

Dealer enquiries welcome. **SNAIL SOFTWARE, 21 Bell Lane, Ludlow, Shropshire. SY8 1BN.**

● Circle No. 280

MICRO ADS

are accepted from private readers only, prepaid and in writing, 20p per word, minimum charge £2.

Please make cheques payable to Practical Computing and send to Room L310, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

FLOATING POINT math routines in 2716 Eprom from Nascom systems with NAS-SYS monitor. £15 with documentation. Andrew Crosland, 17 Longley Lane, Huddersfield, West Yorks, HD4 6PS.

TRANSTEC BC2, Business Microcomputer, 2 × 400Kb disc drives, integral 12" monitor, full detached keyboard, 10 months old, some discs, Cambridge (0223) 316330 evenings.

TELEVIDEO (1983) TS802H 10 MByte Microcomputer, Wordstar, Mailmerge, Datastar, Calcstar, Spellstar, Supersort, Bstam, DBase2, CBasic, MBasic, Cobal, Pascal, PL/1, List over £8,000 accept £3,800 plus VAT. Telephone 01-486 1670 anytime.

NEWBRAIN Model 'A', beginner's manual with tape, psu., leads, manual, 7 tapes. £200. Ring Jonathan Reckles (0636)-72156. Newark, Notts.

NEWBRAIN Educational Games Tapes:- Mastermind, Towers of hanoi, Graphs etc. Ten game tape for £13.95, five game tape for £9.95. Contact: Robert on 01-878-8277.

"NEWBRAIN £50 off list price. Unused and in mint condition. Monitor and printer also available. R. Davies. Crawley 33273 (evenings)"

BUSINESS SOFTWARE for the Newbrain Computer Invoice & Credit Note; Cash Book; Purchase Day Book; Sales Day Book. Full Details & Sample Output from:- Cornix-Micro, 16 Kneesworth Street, Royston, Herts. Tel: Royston (0763) 46065

OPEN HOUSE FOR NOVICES AND BEYOND Choose your time — day or evening. Learn at your own pace on OSBOURNE, RAIR or BBC BASIC, D BASE II, SUPERCALC, WORDSTAR, Graphics Introductory Course £45 Also evening club. Brouchure from: MICROCOMPUTER ADVISORY CENTRE Polytechnic of the South Bank Borough Road, London SE1 OAA or ring: 01-928 8989 ext. 2468

ASHTON-TATE Dbasell for sale, £125, including manual. Woking 66319.

BBC TAPE Program Copier. Back up /multiple copies. M/code, simple to use, OS1.2, £4. S. Law, 105 Gillbent Rd, Cheadle Hulme, Cheshire.

XEROX 820-I Wordprocessor/computer 64K dual 8" floppies. Super DensityKit. As new. £125.00 for quick sale. Telephone Mr. Draper 01-758 1950. (Office hours).

SHARP HX20 including cassette drive carrying case and mains adaptor £495.00 o.n.o. Apple (64K) II plus green moniter dueal discs, includes Pascal £1,100.00. Also some software Visicalc 3.3 £100.00. Vistrend/Visiplot £150.00. Phone 01-808 0562 evenings.

BBC Micro (A/B) owners, develop your touch typing skills with Typing Trainer. Send 75p for listing to C. Galbraith, 65 Balfour Court, Newfarm, KILMARNOCK

COMMODORE C2N Cassette. Recommended for VIC20 and Pet. Brand new. £35.00.Tel. 02756 68152.

BBC LINEAR Regression and Correlation Program. Calculates and outputs: all sums, means, variances, SD, Covariance; plots points and two regression lines; plus analysis of correlation coefficient using the t-distribution. Cassette £5.00. David Wellham, 72 Monmouth Road, Dagenham, Essex. Tel. 593 5591.

S100 BOARDS surplus to requirements, unused and all under half price. Hytech PAM Z80A 64KRAM, Measurement System fast set of CPU board (CPC2810), DMA Floppydisc controller (FDC2800), and 64KRAM (DMB6400), Micropolis FDControlB, Compu-time, Compu-watch, Cromencoparallel I/O 8PIO. Telephone 02407 5611.

MARKETING POSITION SOUGHT by Post-Graduate Diplomat with experience in advertising, publicity, promotional mailing exhibition planning and brochure design for computer products Contact Geopf Pick BYFLEET(09323) 45174

MZ-80K owners. Additional MONITOR will read ANY tape; even BASIC; moves; alter; verify; write; test; etc. 14 functions. £10. J. Leonard. Jasyl. Castle Drive. Praa Sands. PENZANCE.

Advertisement Index

NOMINATIONS FOR BEST PRINTER AWARDS 1983

★ NOW ★ ON RELEASE

ONE YEAR GUARANTEE

Best Star — STAR DP 510/DP515 Matrix Printers

available for around **£289 and £399 ex VAT**

- ★ 80 Column (DP510), 136 Column (DP515)
- ★ 100 CPS, Bi-Directional Logic Seeking
- ★ Friction, Tractor and Roll Holder as standard
- ★ Full standard features including 2.3k Buffer

★ NOW ★ ON RELEASE

ONE YEAR GUARANTEE

Best Performer — JUKI 6100 Daisywheel

available for around **£399 ex VAT**

- ★ 18CPS — Bi-Directional Logic Seeking
- ★ 10, 12, 15 CPI + Proportional Spacing
- ★ "Drop in" Daisywheel — Triumph Adler Compatible
- ★ Supports all Wordstar features
- ★ Diablo protocols — IBM Selectric ribbon
- ★ 2k Buffer as standard — 100 character Daisywheel

★ NOW ★ ON RELEASE

ONE YEAR GUARANTEE

Best Newcomer — SHINWA – CTI CP80 Matrix Printer

available for around **£289 ex VAT**

- ★ 80 CPS — Bi-Directional Logic Seeking 80 Column
- ★ Friction and Adjustable Tractor Feed
- ★ Patented Square Needles up to 9 x 13 matrix
- ★ Hi-Res Graphics and Block Graphics

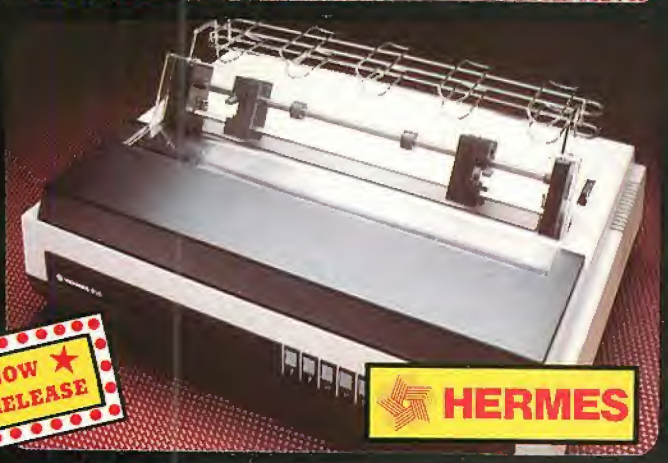

★ NOW ★ ON RELEASE

ONE YEAR GUARANTEE

Best Producer — HERMES 612 WPQ Printer

available from around **£1950 ex VAT**

- ★ Up to 400CPS and Word Processing Quality at 120 CPS
- ★ 10, 12 or 15 CPI — programmable to 1/360" spacing
- ★ 132 column at 10 CPI

All now on general release – see them at your local dealer

Best Distributor:–

Micro Peripherals ltd

69 The Street, Basing, Basingstoke, Hants. RG24 0BY
TEL: (0256) 3232 (12 lines) TELEX: 859669 MICROP G

Please send technical details, printout samples and local dealer details to:– ● Circle No. 241

Name: ..... Position .....

Company: .....

Address: .....

.....

NEW - ZORBA 2000 SERIES
NOW WITH **FULL 9" SCREEN**

NEW MODEL 4 8 Bit Processor
Full 80x25 9" Screen
800KBytes Disk Storage

NEW MODEL 8 8 Bit Processor
Full 80x25 9" Screen
Massive 1.6 MBytes
Disk Storage

NEW MODEL 16 8 and 16 Bit Processors
Full 80x25 9" Screen
Massive 1.6 MBytes
Disk Storage

All Models Include:-

FREE SOFTWARE
C BASIC ★ WORDSTAR ★ MAILMERGE ★ CALCSTAR

MORE COMPATABILITY
Read & Write the following formats:- IBM PC, OSBORNE, SUPERBRAIN, XEROX 820, DEC VT180, KAYCOMP & TELEVIDEO

MORE EXPANDABILITY
Outputs include:- Parallel, Serial & IEEE 488

Details from the Sole UK Importer:-

Sun Computing Services Ltd,
Concorde House, St. Anthony's Way, Feltham,
Middlesex, TW14 0NH.
Tel 01 890 1440
Twx 8954428 SUNCOM G

● **Circle No. 242**

PRACTICAL COMPUTING
Room 309H,
Quadrant House,
The Quadrant,
Sutton,
Surrey, SM2 5AS

Practical Computing

GREAT CHRISTMAS GIFT OFFER

More copies for less money. That's what you get when you take up the great Practical Computing Christmas subscription offer.

So, whether it's a subscription for a friend with a personal computer, or that little extra something for yourself, you'll get two extra issues absolutely free of charge which means that you'll receive 14 issues of Practical Computing instead of 12. And all for £1.00 less than you would normally pay!

PRACTICAL COMPUTING: CHRISTMAS GIFT SUBSCRIPTION OFFER

Yes, I wish to take out a year's subscription to Practical Computing at the reduced rate of £12.00 (UK) or £18.00 (Overseas) with the added bonus of two extra issues absolutely free of charge.

I enclose cheque/PO to the value of: ☐ £12.00 UK ☐ £18.00 Overseas

OR Please debit my credit card account: Expiry Date .....

Account No. | | | | | | | | | | | | | | | |

Tick relevant box

Barclaycard/Visa ☐ Access ☐

Diners Card ☐ American Express ☐

Signed ..... Date .....

NAME .....

ADDRESS .....
(BLOCK LETTERS PLEASE)

.....

.....

.....POST CODE.....

Offer Closes 23rd December, 1983

Please return this order form with your remittance please to:

PRACTICAL COMPUTING, Room 309H, Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS

Name and address of person to whom gift subscription is to be sent:

NAME .....

ADDRESS .....
(BLOCK LETTERS PLEASE)

.....

.....

.....POST CODE.....

Registered in England 151537. Registered Office, Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS.